

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	25APR2021	DW	CW
	A1	ECR-21-121080	17NOV2021	DW	CW

NOTES:



1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 50V AC, 120V DC
RATED CURRENT: 6.5A
INSULATION RESISTANCE: >=400MΩ
RATED IMPULSE VOLTAGE: 0.8KV
POLLUTION DEGREE: 3
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.08-0.52 mm² (28-20 AWG)
CONTACT TYPE: CRIMP CONTACT

2. CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING: T20700X10XX000)





注释:

1. 技术参数:
绝缘材料: PC
额定电压: 50V AC, 120V DC
额定电流: 6.5A
绝缘电阻: >=400MΩ
额定脉冲电压: 0.8KV
污染等级: 3
插拔次数: 500次
接线范围: 0.08-0.52 mm² (28-20 AWG)
接线类型: 冷压接

2. 端子需要单独订购.
(订货号参考图面: T20700X10XX000)

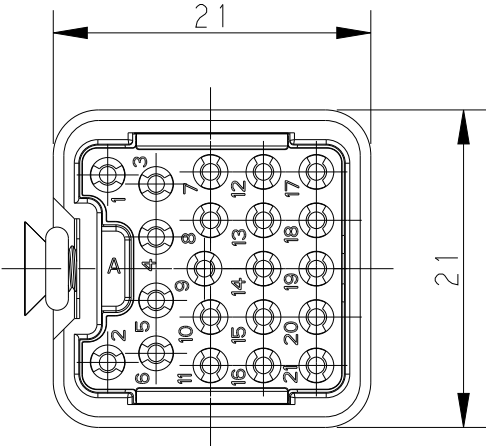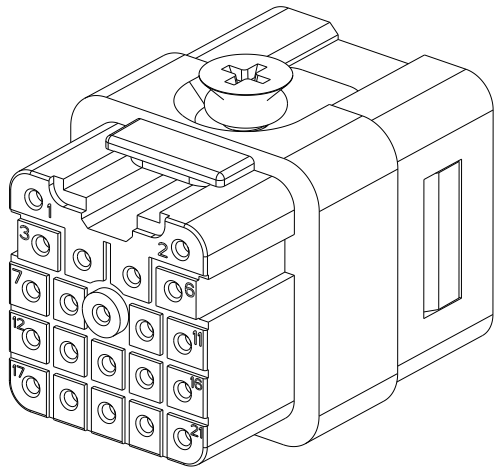

M3 SCREW, RECOMMENDED
TIGHTENING TORQUE 0.5Nm
M3螺丝, 推荐扭力矩为0.5Nm

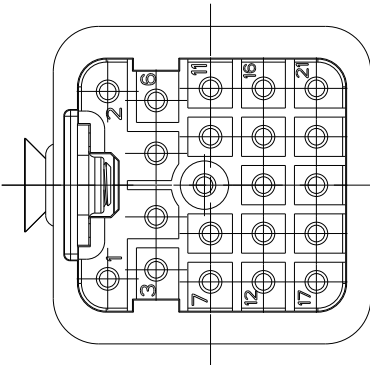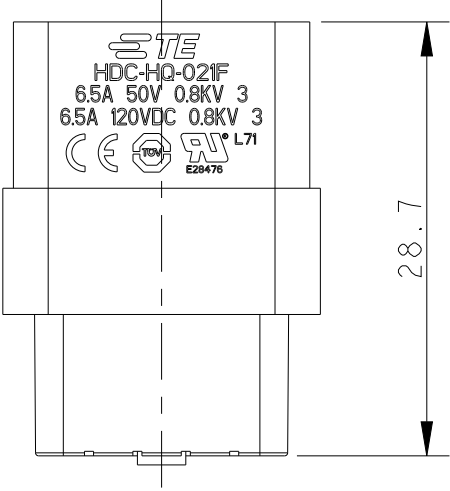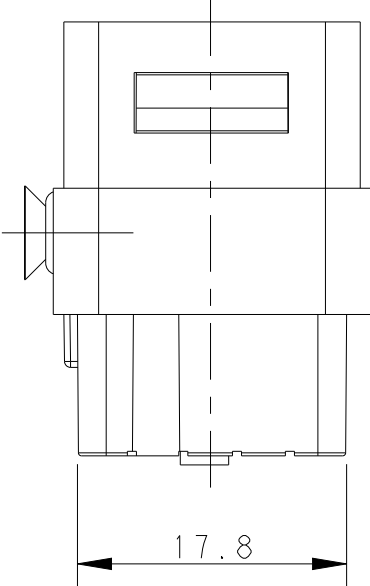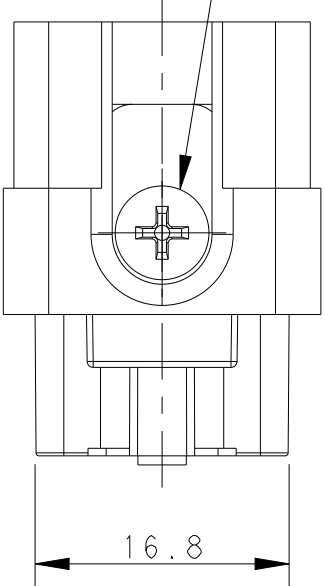

T2080212201-007	HQ-021-F	HQ-021 FEMALE INSERT HQ-021 母插
PART NUMBER 产品料号	PART DESCRIPTION 产品描述	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 09MAR2021 DAVID WANG	TE Connectivity			
		CHK 09MAR2021 GINO YAO				
		APVD 09MAR2021 CHRIS WANG	NAME HQ-021-F			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC 108-137560			
		0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±	APPLICATION SPEC 114-137560			
MATERIAL		FINISH	WEIGHT -			
			CUSTOMER DRAWING			
			SIZE A2	CAGE CODE 00779	DRAWING NO. C-T2080212201007	RESTRICTED TO -
			SCALE 2:1	SHEET 1 OF 1	REV A1	