

D

C

B

A






D

C

B

A


© 2021 TE Connectivity. All Rights Reserved.

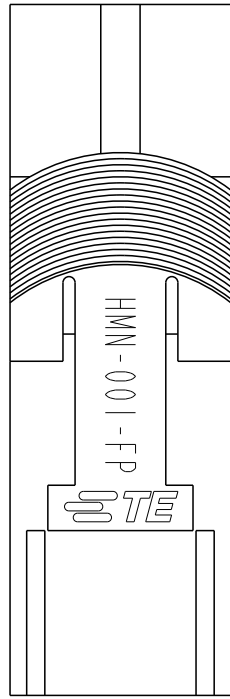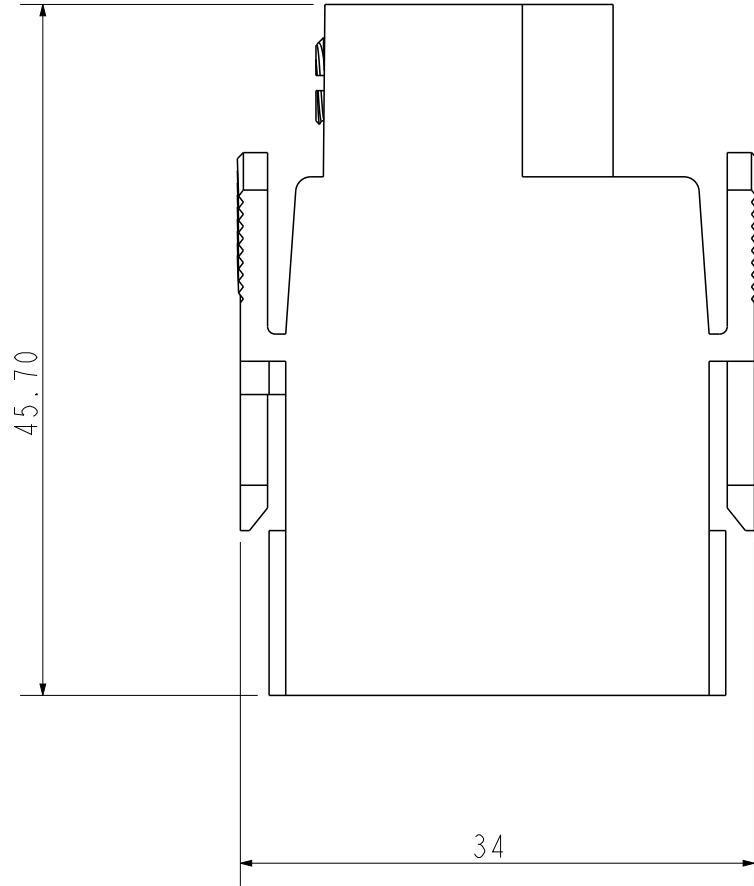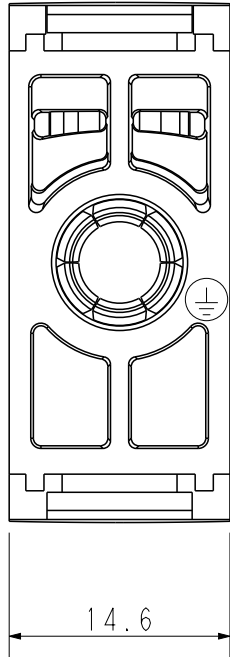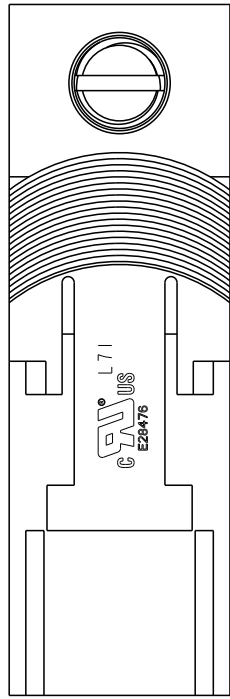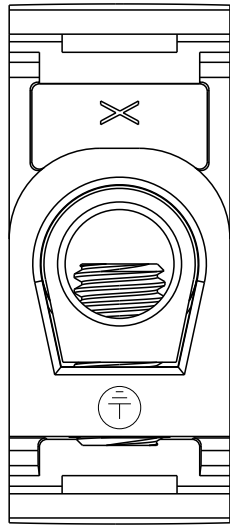


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	10MAY2021	GY	CW
	B	ECR-22-162015	15JUN2023	GY	CW

NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
MATING CYCLES: 500 CYCLES
WIRE RANGE: 1.5mm²~16.0mm² (AWG16-AWG6)
CONTACT TYPE: SCREW CLAMP (M6)

注释:
1. 技术参数:
绝缘材料: PC
插拔次数: 500 次
接线范围: 1.5mm²~16.0mm² (AWG16-AWG6)
接线类型: 螺丝压接 (M6)

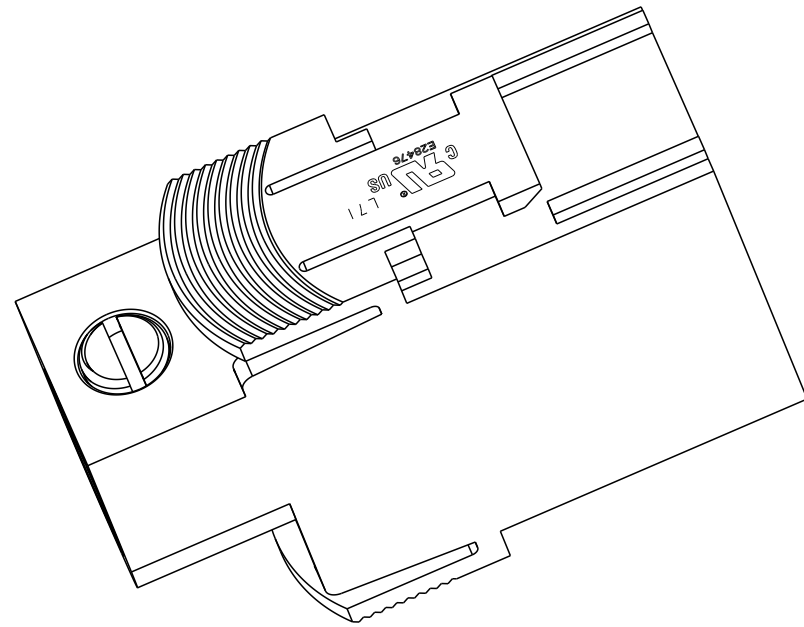

T211101P201-000	HMN-001-FP	HMN-001 GROUND INSERT, FEMALE HMN-001 单芯接地模块, 母插
PART NUMBER 料 号	PART DESCRIPTION 描 述	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN GINO.YAO 10MAY2021	 TE Connectivity					
DIMENSIONS: mm		CHK CHRIS..WANG 10MAY2021						
		APVD CHRIS..WANG 10MAY2021	NAME HMN-001-FP					
		PRODUCT SPEC 108-137570						
		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		APPLICATION SPEC 114-137570	SIZE A2	CAGE CODE 00779	DRAWING NO C-T211101P201000	RESTRICTED TO -
MATERIAL -		FINISH -	WEIGHT -	SCALE 2:1			SHEET 1 OF 1	REV B
CUSTOMER DRAWING								