
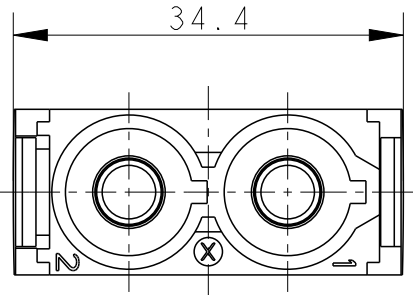
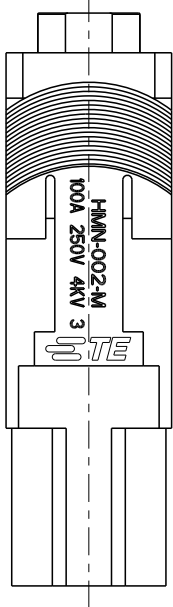
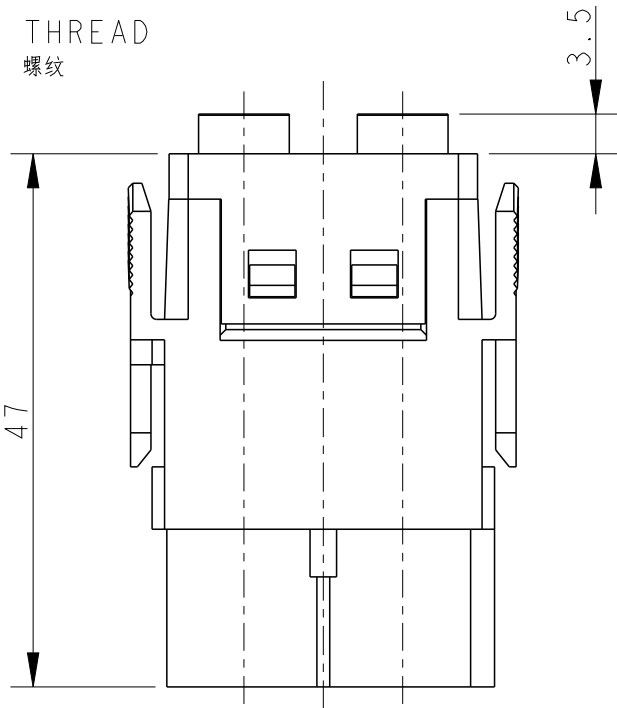
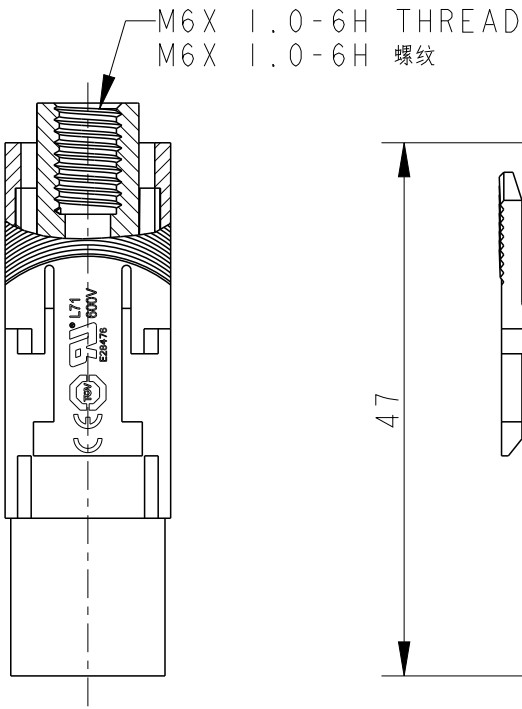
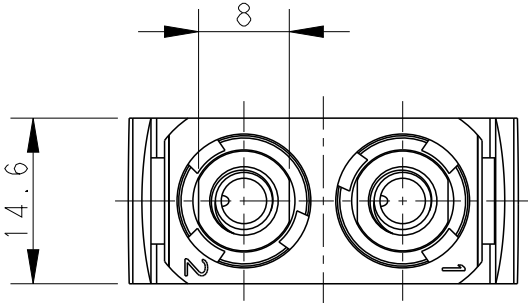


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	09MAY2023	DW	CW
	A1	ECR-23-179527	03JUL2023	DW	CW

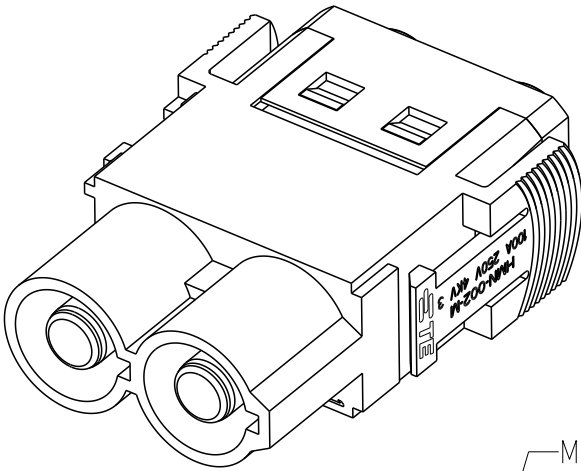

NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250V
RATED CURRENT: 100A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 4KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
CONTACT TYPE: M6 SCREW CONTACT

注释:
1. 技术参数:
绝缘材料: PC
额定电压: 250V
额定电流: 100A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 4KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线类型: M6 螺纹连接

T2111020101-002	HMN-002-M	HMN-002 MALE MODULE INSERT, M6 THREAD PIN CONTACT HMN-002 模块公插, 带M6螺纹公端子
PART NUMBER 料号	PART DESCRIPTION 描述	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID WANG 09MAY2023	TE Connectivity HMN-002-M		
		CHK GINO YAO 09MAY2023			
		APVD CHRIS WANG 09MAY2023			
		PRODUCT SPEC 108-137641			
DIMENSIONS: mm		APPLICATION SPEC 114-137641			
		WEIGHT -	SIZE A3	CAGE CODE 00779	DRAWING NO T2111020101002
MATERIAL -		FINISH -	RESTRICTED TO -		
			CUSTOMER DRAWING		
			SCALE 3:2	SHEET 1 OF 1	REV A1