
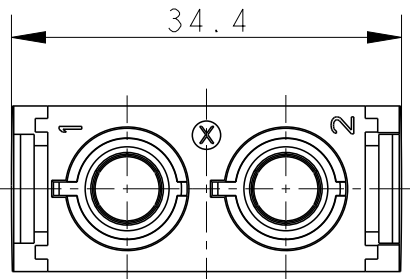
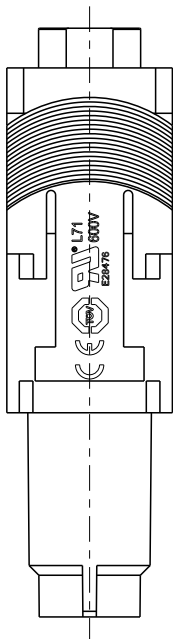
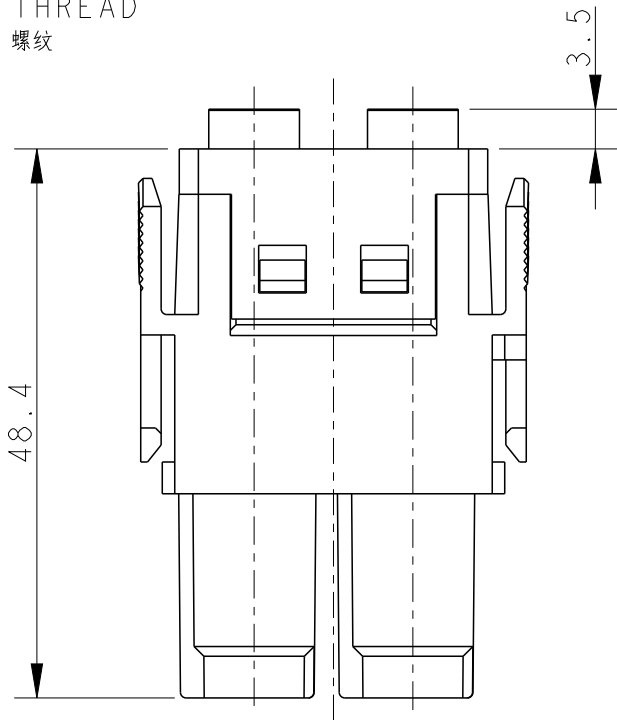
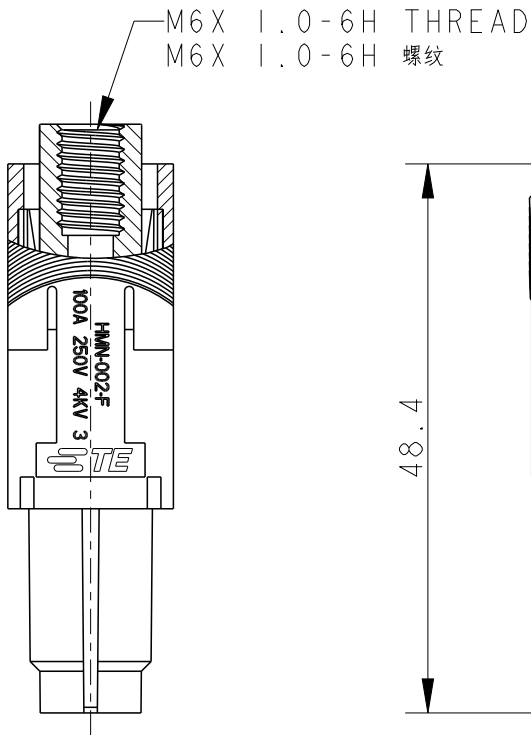
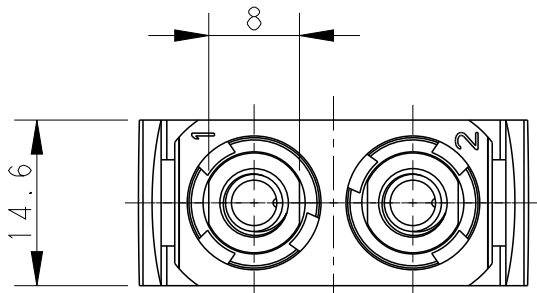



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	09MAY2023	DW	CW
	A1	ECR-23-179527	03JUL2023	DW	CW

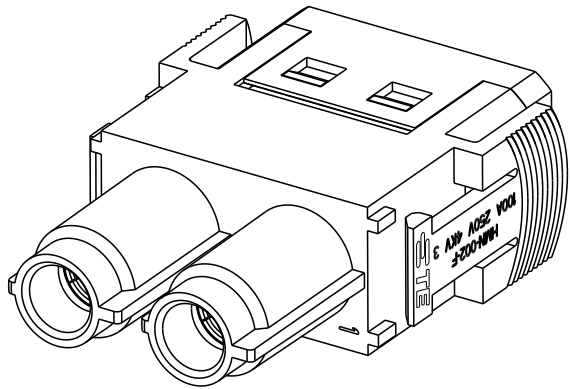

NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250V
RATED CURRENT: 100A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 4KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
CONTACT TYPE: M6 SCREW CONTACT

注释:
1. 技术参数:
绝缘材料: PC
额定电压: 250V
额定电流: 100A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 4KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线类型: M6 螺纹连接

T2111020201-002	HMN-002-F	HMN-002 FEMALE MODULE INSERT, M6 THREAD SOCKET CONTACT HMN-002 模块母插, 带M6螺纹母端子
PART NUMBER 料号	PART DESCRIPTION 描述	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID WANG 09MAY2023		TE TE Connectivity													
DIMENSIONS: mm		CHK GINO YAO 09MAY2023															
		APVD CHRIS WANG 09MAY2023		NAME HMN-002-F													
		TOLERANCES UNLESS OTHERWISE SPECIFIED:						PRODUCT SPEC 108-137641									
		0 PLC ±-		APPLICATION SPEC 114-137641													
		1 PLC ±-															
		2 PLC ±-															
3 PLC ±-		RESTRICTED TO															
4 PLC ±-																	
ANGLES ±-		WEIGHT		SIZE		CAGE CODE		DRAWING NO		- -							
MATERIAL		FINISH		A3		00779		C-T2111020201002									
-		-		CUSTOMER DRAWING		SCALE		3:2		SHEET		1 OF 1		REV		A1	
-		-															