

D

C

B

A



D

C



B

A


© 2022 TE Connectivity. All Rights Reserved.

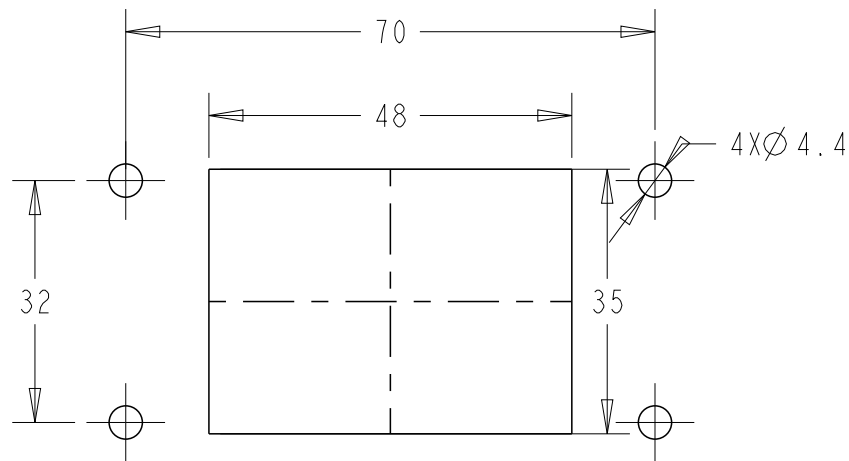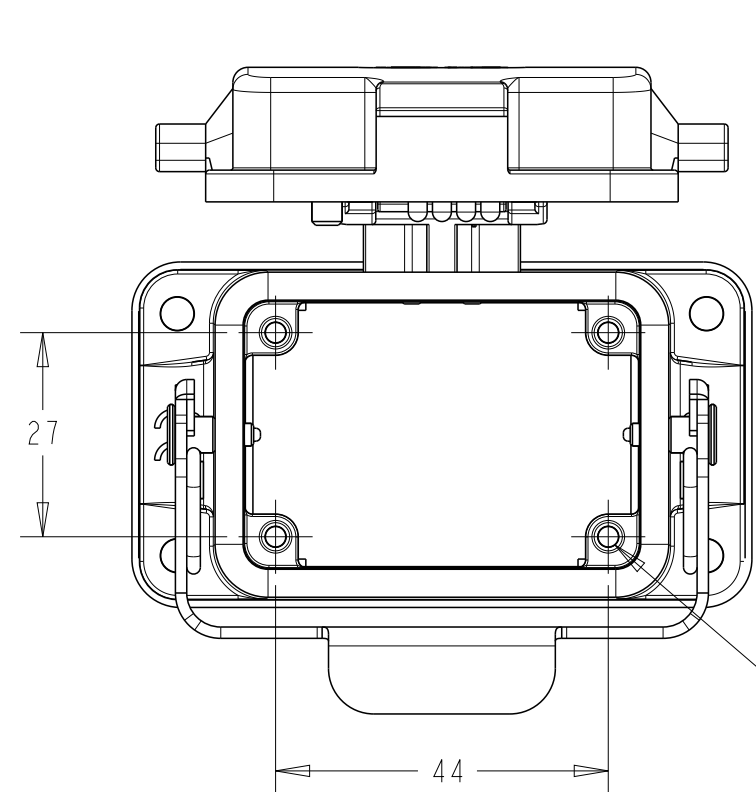


RECOMMENDED PANEL CUT OUT DIMENSION
推荐开孔安装尺寸

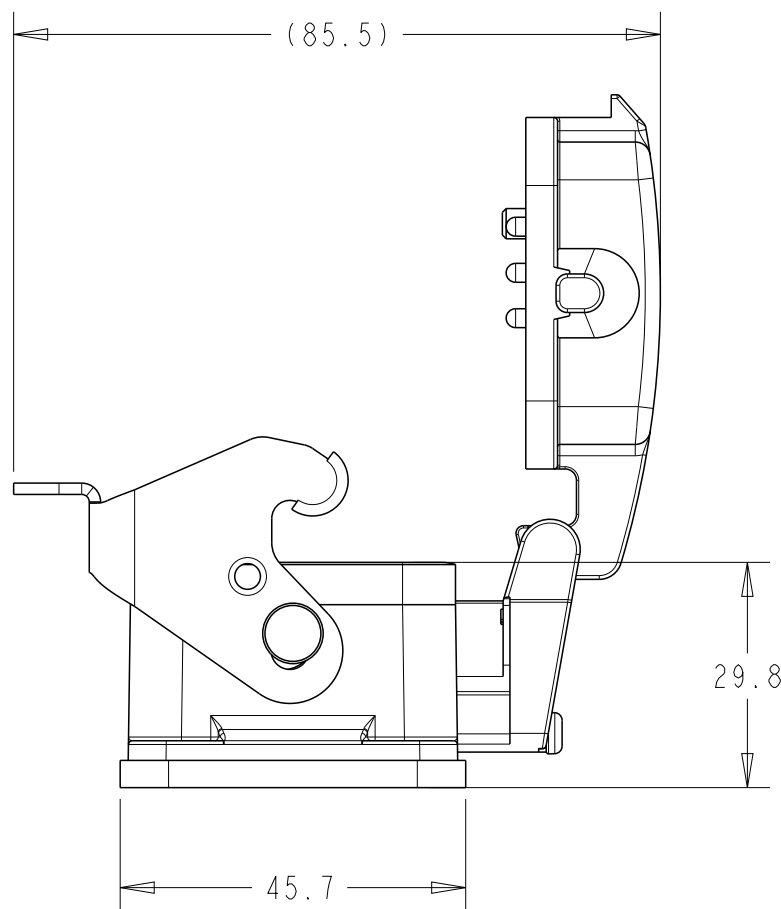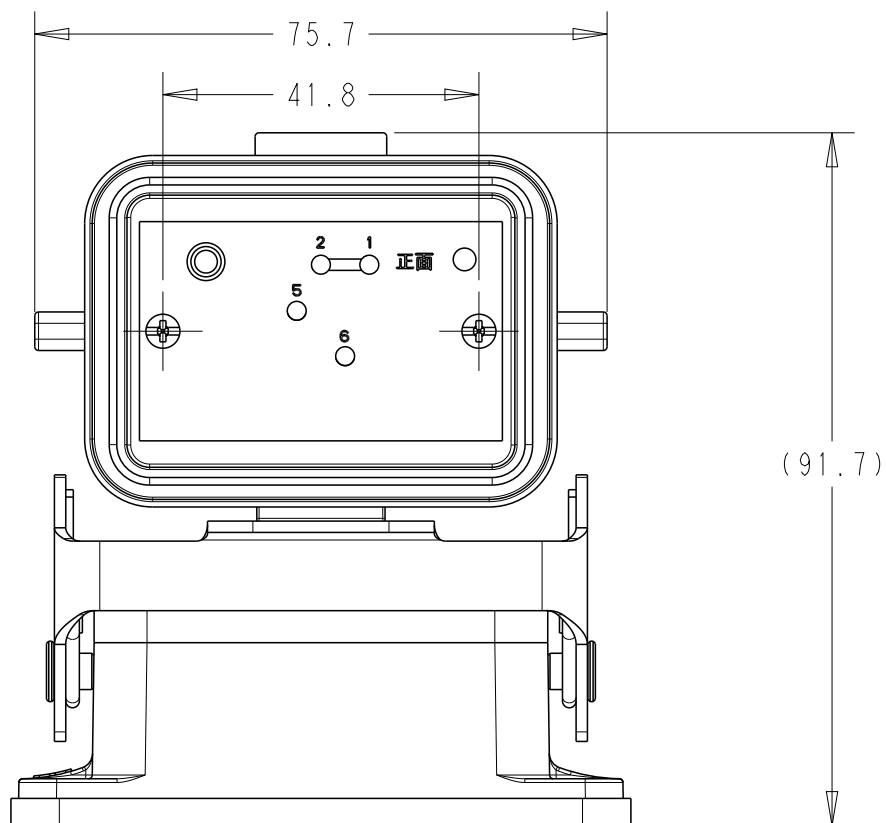

4X M3 SCREW, RECOMMENDED TIGHTENNING TORQUE 0.5Nm
4X M3 螺丝, 推荐锁紧力矩0.5Nm

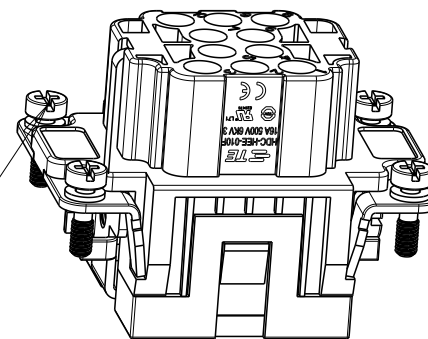

ONLY MATING WITH INSERT T2050102201-000, NEED ORDER SEPERATELY
只与插芯T2050102201-000配合使用, 需要单独订货

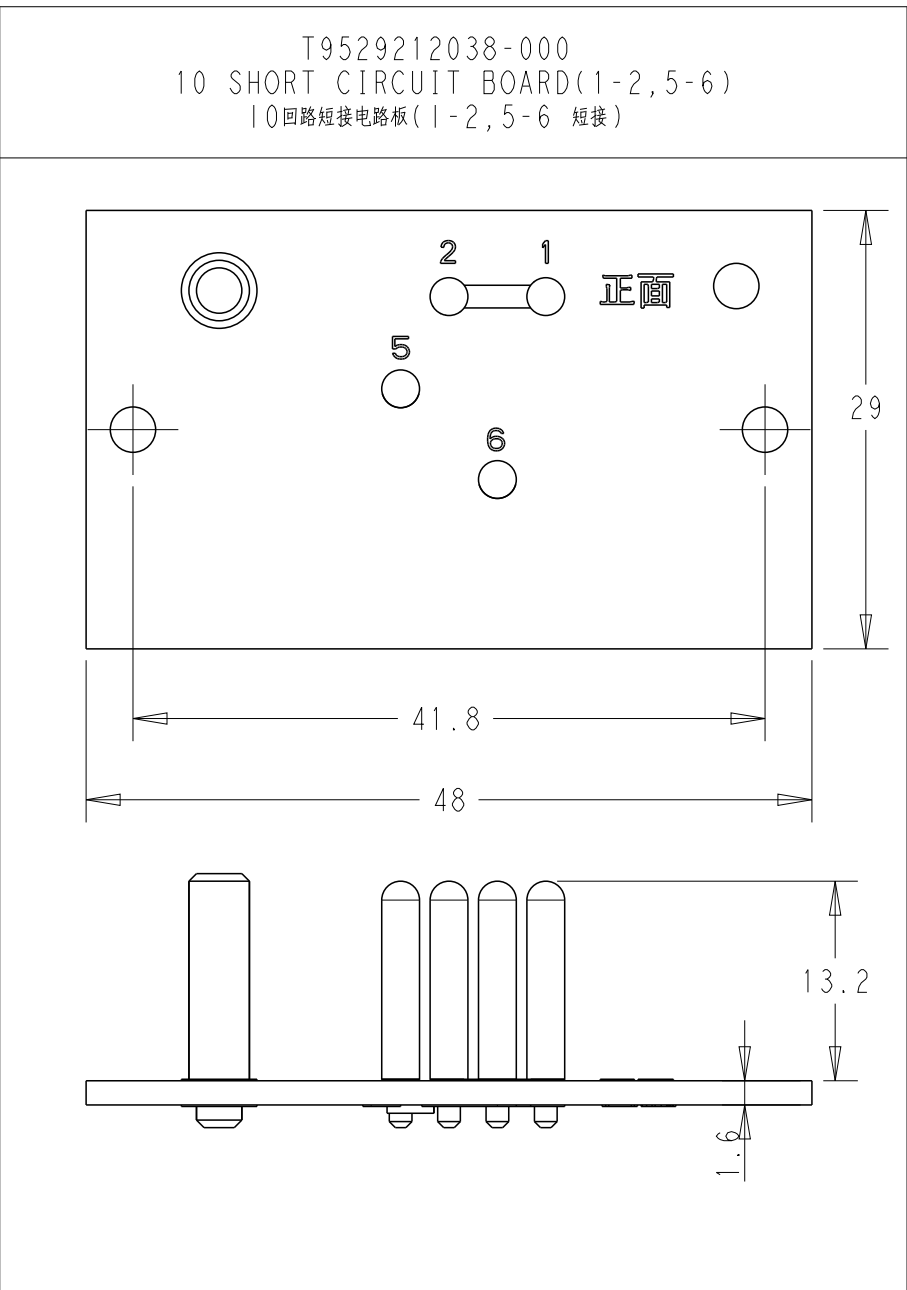


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	13JUN2022	RW	CW
	B	ECR-23-194273	18DEC2023	BS	CW

NOTES:

- TECHNICAL CHARACTERISTICS:
DEGREE OF PROTECTION: IP65
- RESISTANCE DATA:
VALUE: 120Ω
POWER RATING: 0.25W
PCB T9529212038-000 COULD ORDERING SEPERATELY

注释:

- 技术参数:
防护等级 IP65
- 电阻参数:
阻值: 120Ω
额定功率: 0.25W
PCB板 T9529212038-000 可以单独订货

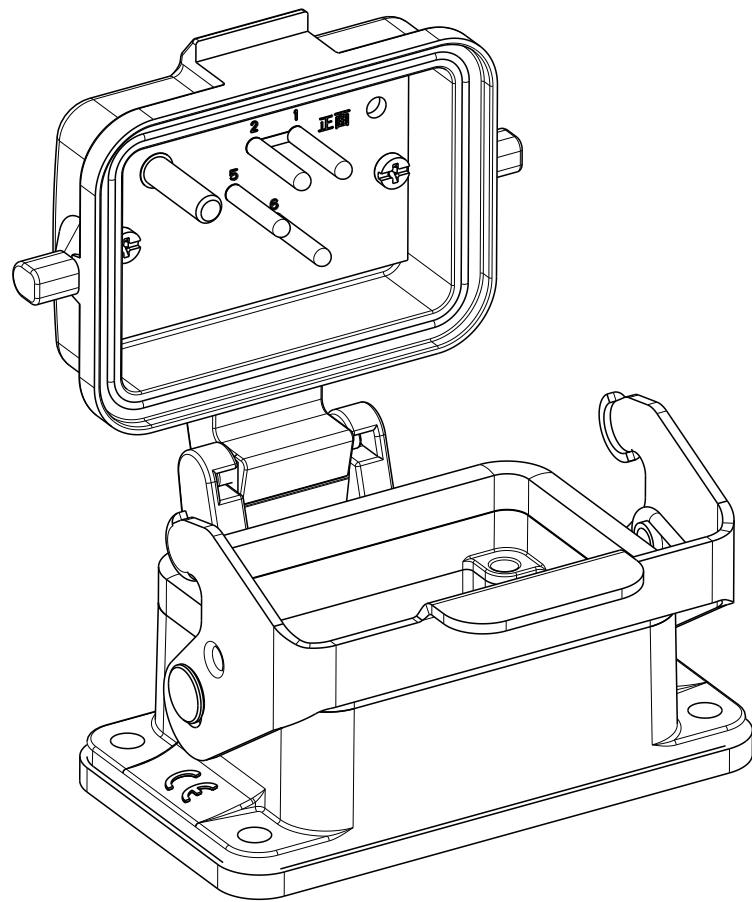

T2120100116-000	ZGG-10DT(1-2,5-6)	H6B ELEVATOR MAINTENANCE BOX (1-2,5-6) H6B 电梯检修盒(1-2 5-6)
PART NUMBER 料号	PART DESCRIPTION 描述	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RITA WANG 10JUN2022	TE Connectivity			
DIMENSIONS: mm		CHK GINO YAO 10JUN2022				
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH		APVD CHRIS WANG 10JUN2022	NAME ZGG-10DT(1-2,5-6)			
MATERIAL -		PRODUCT SPEC 108-137476	SIZE A2		CAGE CODE 00779	DRAWING NO C-T2120100116000
		APPLICATION SPEC 114-137476	RESTRICTED TO -			
		WEIGHT -	SCALE 1:1		SHEET 1 OF 1	REV B
		CUSTOMER DRAWING				