
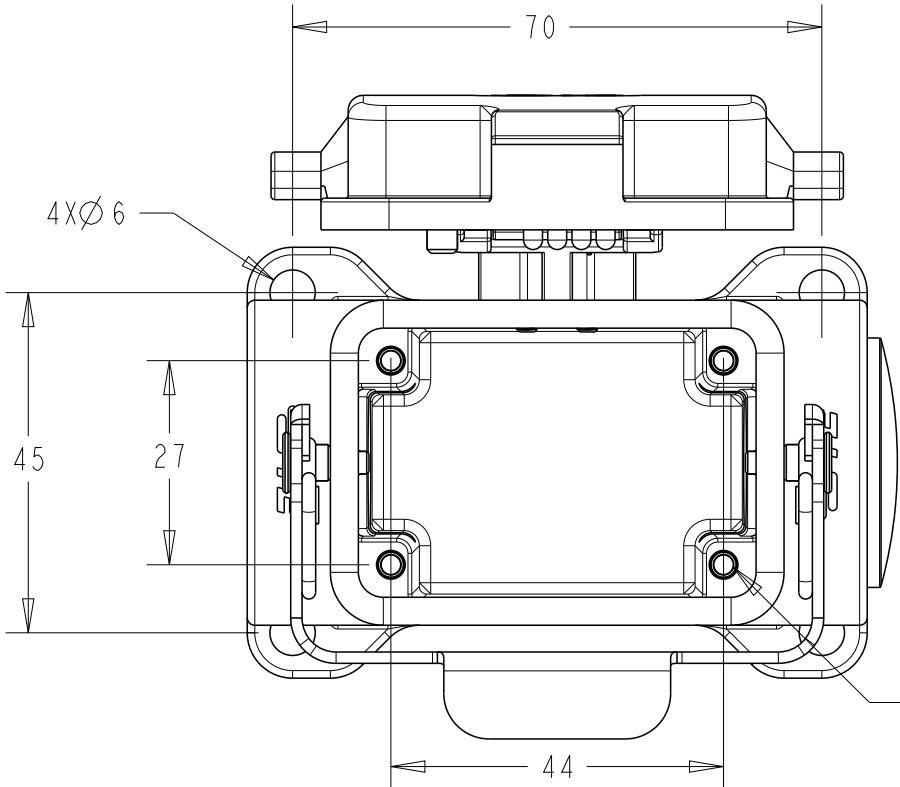


D


C

B


A

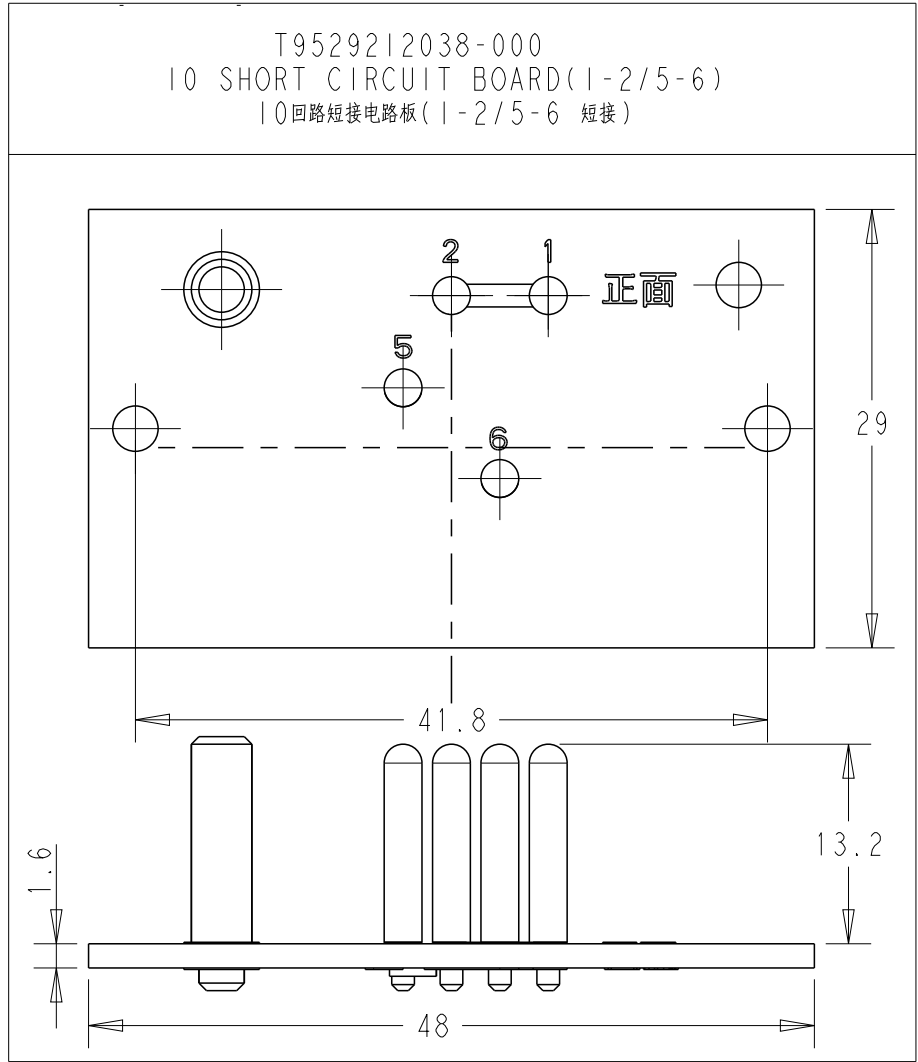




4X M3 SCREW, RECOMMENDED
TIGHTENING TORQUE 0.5Nm
4X M3 螺丝, 推荐锁紧力矩0.5Nm

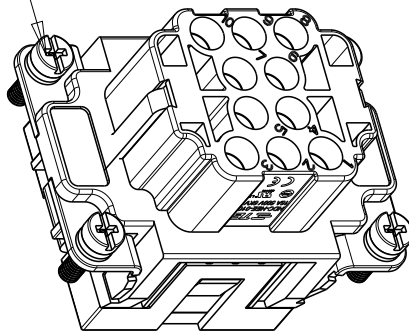

ONLY MATING WITH INSERT T2050102201-000,
NEED ORDER SEPERATELY
只与插芯T2050102201-000配合使用, 需要单独订货

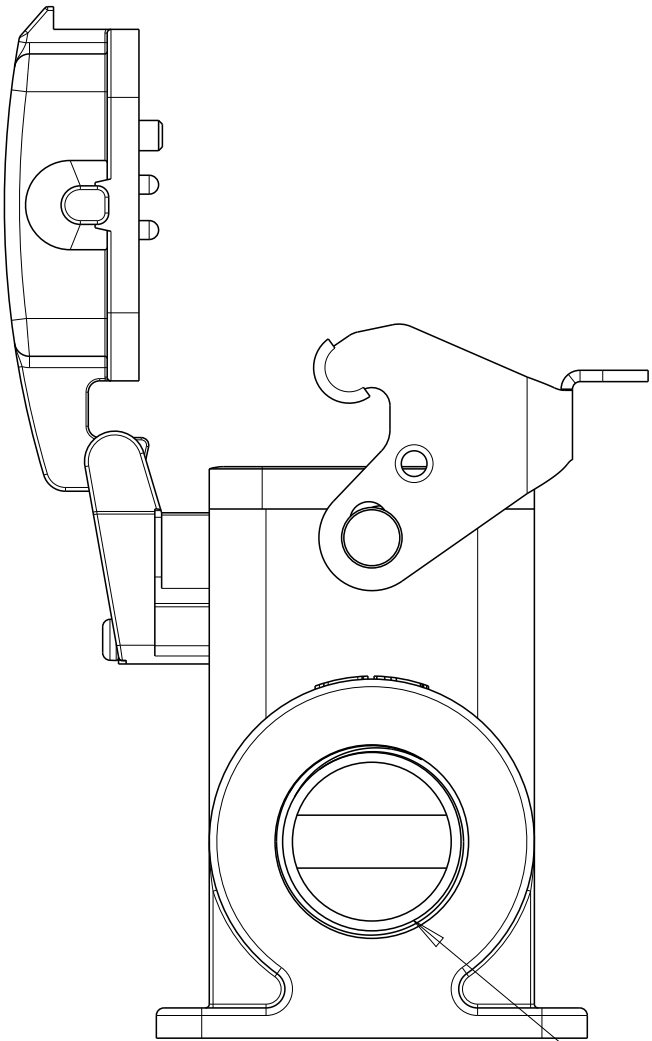

PG21 ENTRY HOLE
PG21 进线孔

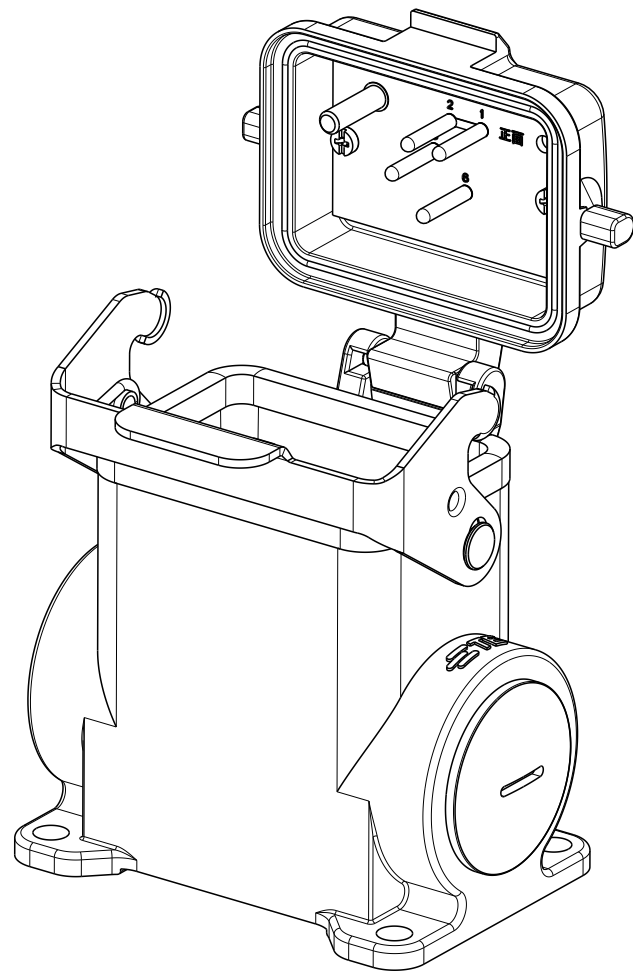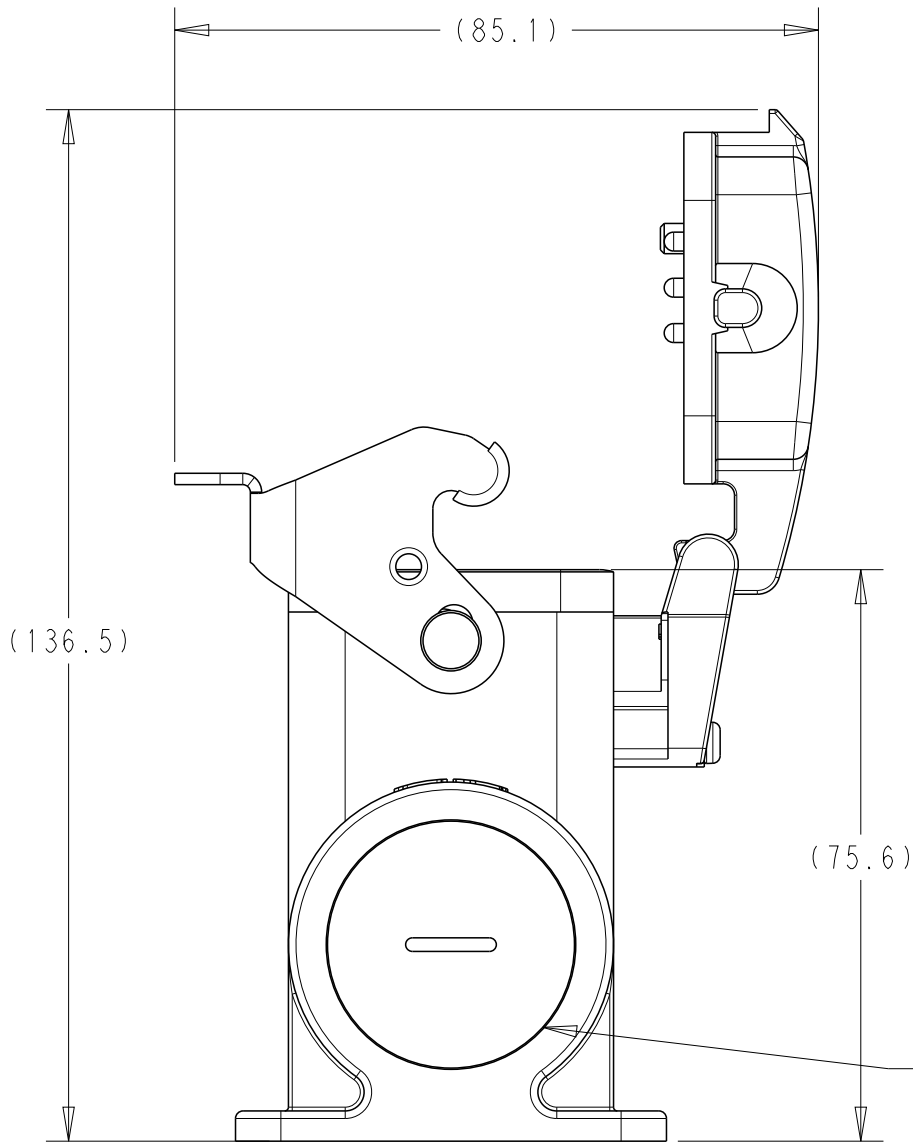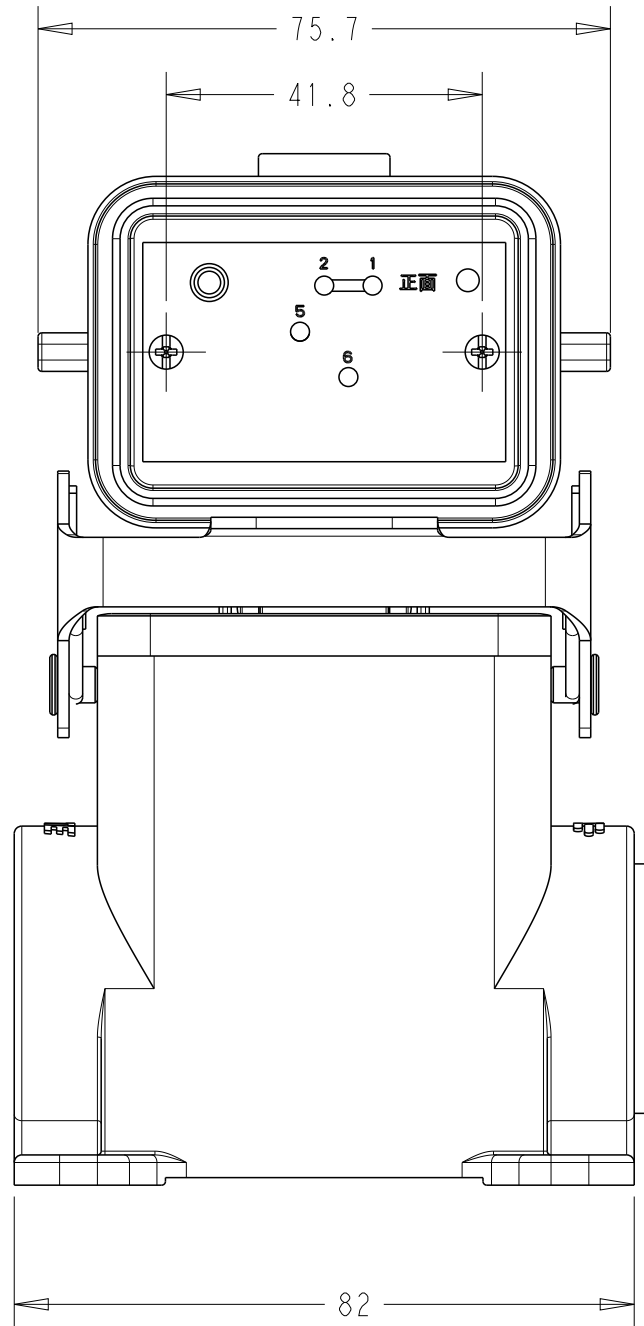

SCALE 4:5

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	30MAY2022	RW	CW
	B	ECR-23-194273	18DEC2023	BS	CW

NOTES:

1. TECHNICAL CHARACTERISTICS:
DEGREE OF PROTECTION :IP65

2. RESISTANCE DATA:

POWER RATING:0.25W
RESISTANCE VALUE: 120Ω

. PCB T9529212038-000 COULD ORDERING SEPERATELY

注释:

1. 技术参数:

防护等级 IP65

2. 电阻参数:

额定功率: 0.25W
阻值: 120Ω

. PCB板 T9529212038-000 可以单独订货

T2120060105-000	ZGG-10DT-PG21(1-2/5-6)	H6B ELEVATOR MAINTENANCE BOX,SURFACE MOUNTED 2G21 (1-2/5-6) H6B 电梯检修盒, 表面安装2PG21(1-2/5-6)
PART NUMBER 料 号	PART DESCRIPTION 描 述	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RITA WANG 30MAY2022	TE Connectivity		
DIMENSIONS: mm		CHK GINO YAO 30MAY2022			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD CHRIS WANG 30MAY2022	NAME ZGG-10DT-2PG21(1-2/5-6)		
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		PRODUCT SPEC 108-137476	SIZE A2		
MATERIAL -		APPLICATION SPEC 114-137476	CAGE CODE -		
		WEIGHT -	DRAWING NO C-T2120060105000		
		CUSTOMER DRAWING	RESTRICTED TO -		
			SCALE 1:1		
			SHEET 1 OF 1		
			REV B		