







P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	30 JUL 2020	GY	CW
	A1	ECR-20-016041	7 FEB 2021	GY	CW
	B	ECR-21-103103	13 MAY 2021	GY	CW
	C	ECR-21-111798	07 OCT 2021	WQR	CW

NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 50V
RATED CURRENT: 1A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 0.8KV
POLLUTION DEGREE: 3
MATING CYCLES: 500
OPERATION TEMPERATURE: $-40^{\circ}C \sim +70^{\circ}C$

注释:
1. 技术参数:
绝缘材料: PC
额定电压: 50V
额定电流: 1A
绝缘电阻: $\geq 400M\Omega$
脉冲电压: 0.8KV
污染等级: 3
插拔次数: 500
工作温度: $-40^{\circ}C \sim +70^{\circ}C$

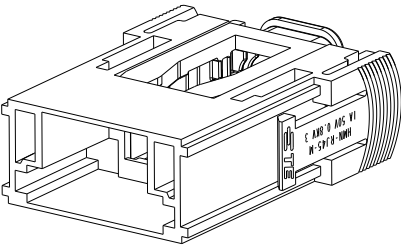

Notification: Please check suitability of your plug to this product.

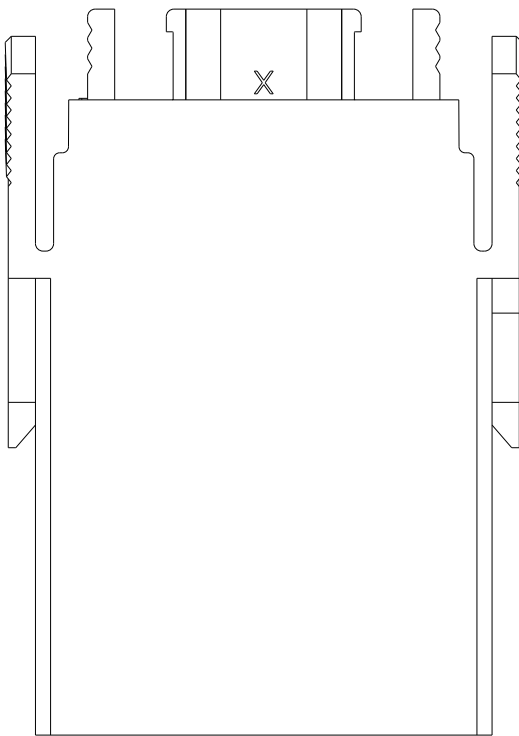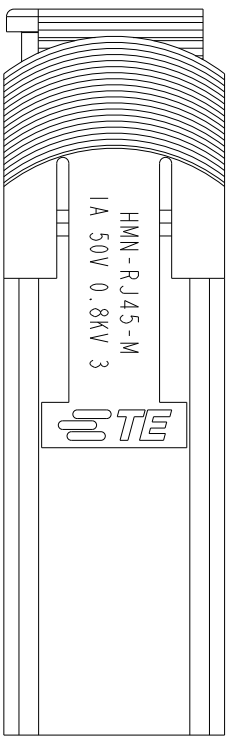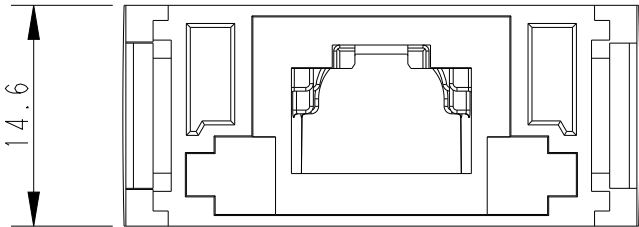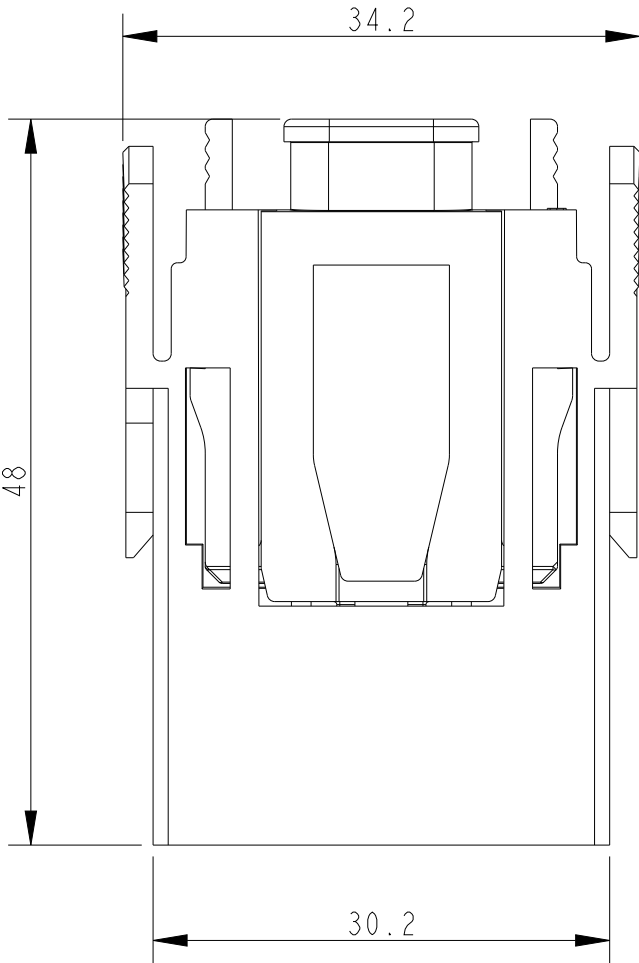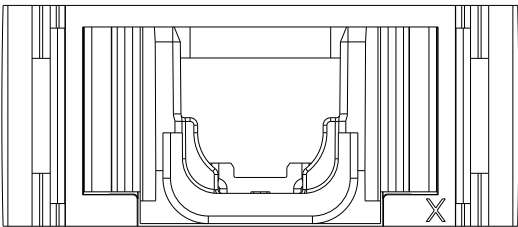

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC $\pm$ 1 PLC $\pm$ 2 PLC $\pm$ 3 PLC $\pm$ 4 PLC $\pm$ ANGLES $\pm$
MATERIAL	FINISH
-	-
-	-

T2113000101-200		HMN-RJ45-M		HMN-RJ45 MALE MODULE INSERT HMN-RJ45 公插	
PART NUMBER 料 号		PART DESCRIPTION 描 述			
DWN GINO.YAO	30 JUL 2020	TE TE Connectivity			
CHK CHRIS.WANG	30 JUL 2020				
APVD CHRIS.WANG	30 JUL 2020				
PRODUCT SPEC					
108-137516		NAME HMN-RJ45-M			
APPLICATION SPEC					
114-137516		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
WEIGHT -		A3	00779	C-T2113000101200	-
CUSTOMER DRAWING				SCALE 1:1	SHEET 1 OF 1
				REV	C