


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	ECR-18-004585	26MAR2018	DW	CW
	B	ECR-21-117384	15NOV2021	WQR	CW
	B1	ECR-22-161571	30DEC2022	WQR	CW
	C	ECR-25-237972	16JUN2025	ABS	RB

NOTES:






1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC (GRAY)
RATED VOLTAGE: 250V
RATED CURRENT: 10A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 4KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: $0.14mm^2 \sim 2.5mm^2$ (AWG26-AWG14)
CONTACT TYPE: CRIMP CONTACT
2. CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER NO. REFER TO DRAWING: T20200X10XX000.)

注释:


1. 技术参数:
绝缘材料: PC (GRAY)
额定电压: 250V
额定电流: 10A
绝缘电阻: $\geq 400M\Omega$
脉冲电压: 4KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: $0.14mm^2 \sim 2.5mm^2$ (AWG26-AWG14)
接线类型: 冷压接
2. 端子需要单独订购.
(订购单号参考图面: T20200X10XX000.)

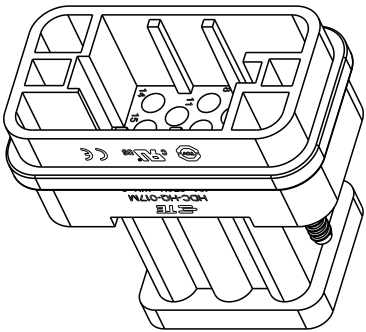

SCALE 1:1

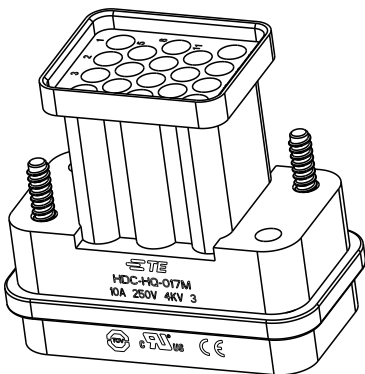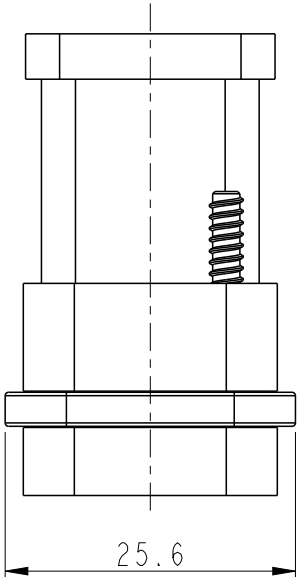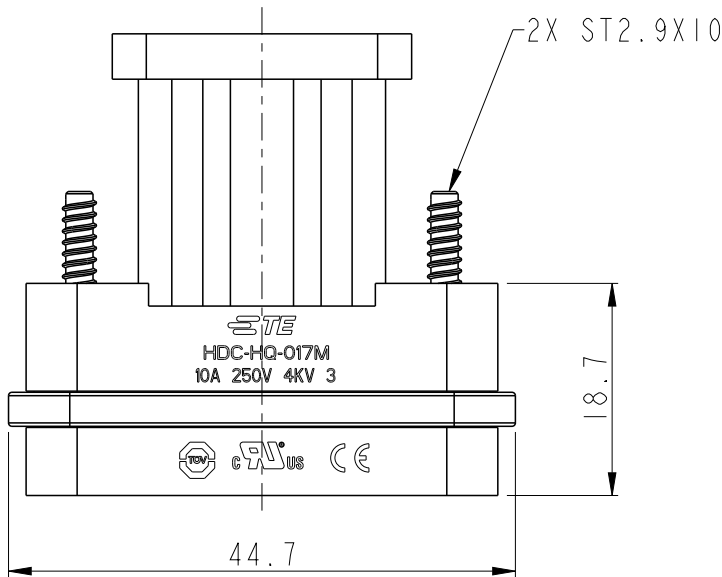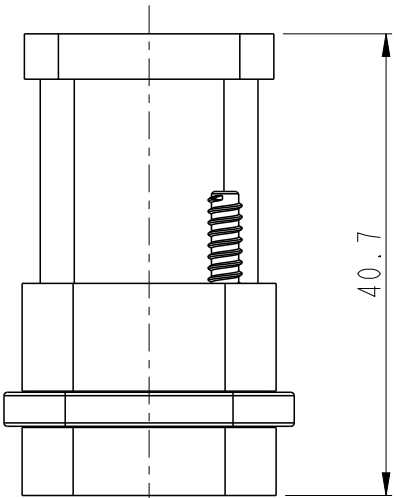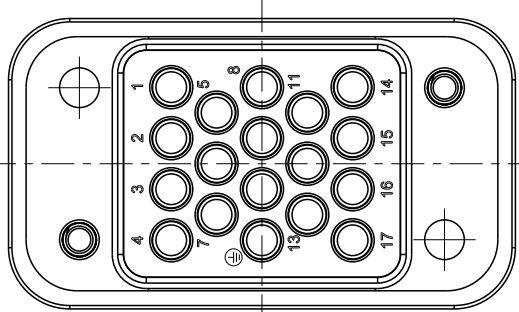

SCALE 1:1

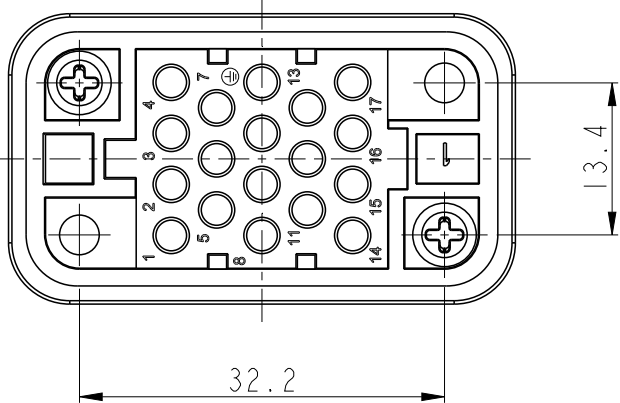

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC $\pm$ 1 PLC $\pm$ 2 PLC $\pm$ 3 PLC $\pm$ 4 PLC $\pm$ ANGLES $\pm$
MATERIAL	FINISH
-	-
-	-

DWN	13OCT2016
CHK	13OCT2016
APVD	13OCT2016
PRODUCT SPEC	108-137116
APPLICATION SPEC	114-137116
WEIGHT	-
CUSTOMER DRAWING	

T2080172101-000		HQ-017-M		HQ-017 MALE INSERT HQ-017公插	
PART NUMBER 料号		PART DESCRIPTION 描述			
DWN		TE Connectivity			
CHK		NAME			
APVD		HQ-017-M			
PRODUCT SPEC		SIZE			
APPLICATION SPEC		CAGE CODE			
WEIGHT		DRAWING NO			
CUSTOMER DRAWING		RESTRICTED TO			
SCALE		SHEET			
3:2		1 OF 1			
REV		C			