
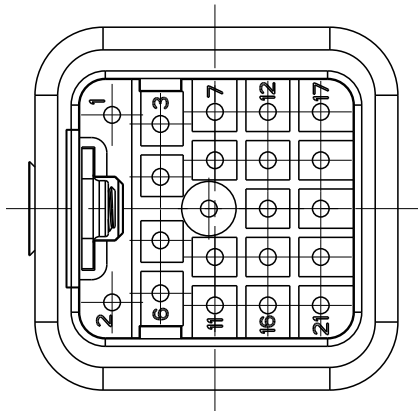
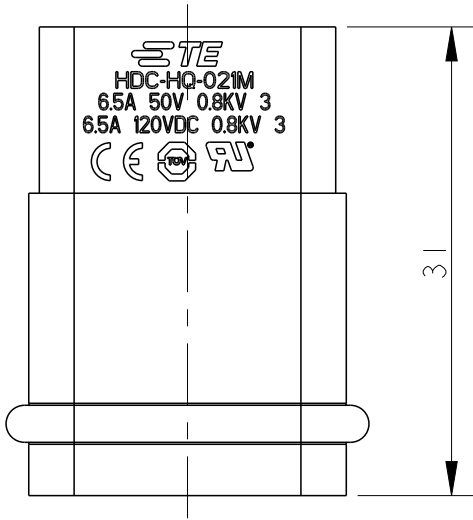
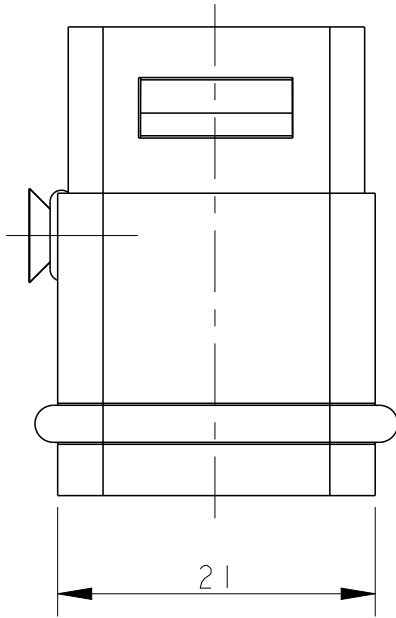
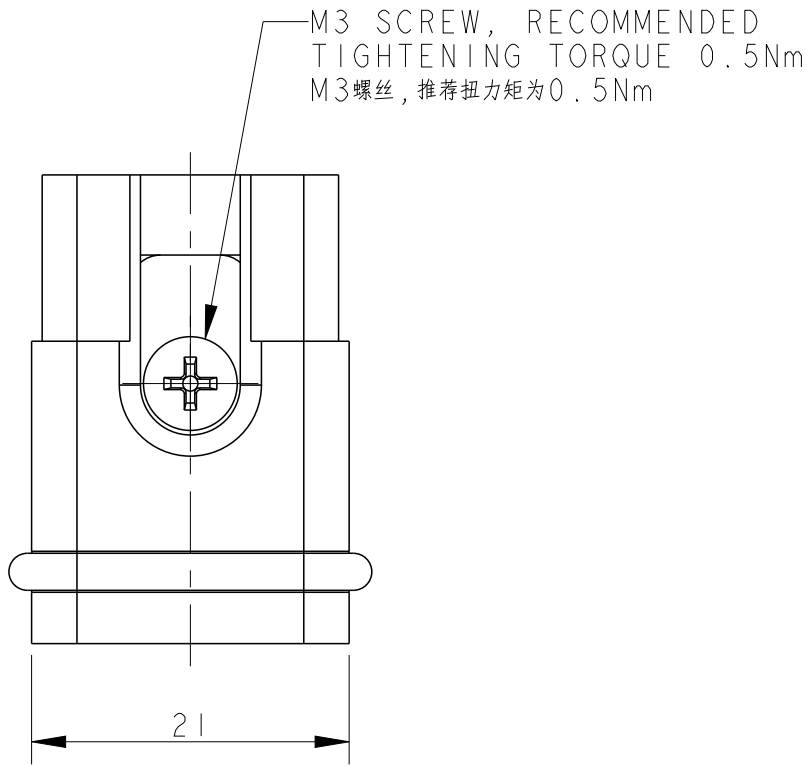
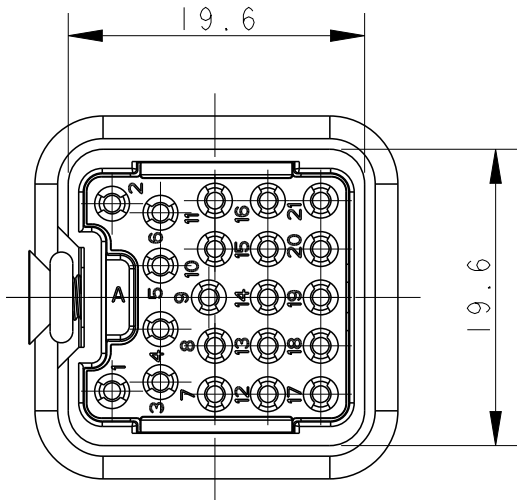


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	25APR2021	DW	CW
	A1	ECR-21-121080	17NOV2021	DW	CW
	B	ECR-25-237972	16JUN2025	ABS	RB

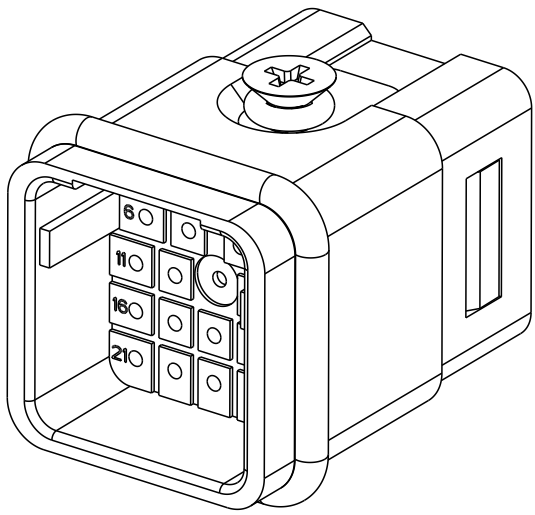

- NOTES:
- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 50V AC, 120V DC
RATED CURRENT: 6.5A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 0.8KV
POLLUTION DEGREE: 3
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.08-0.52 mm² (28-20 AWG)
CONTACT TYPE: CRIMP CONTACT
 - CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING: T20700X10XX000)
- 注释:
- 技术参数:
绝缘材料: PC
额定电压: 50V AC, 120V DC
额定电流: 6.5A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 0.8KV
污染等级: 3
插拔次数: 500次
接线范围: 0.08-0.52 mm² (28-20 AWG)
接线类型: 冷压接
 - 端子需要单独订购。
(订货号参考图面: T20700X10XX000)

T2080212101-007	HQ-021-M	HQ-021 MALE INSERT HQ-021 公插
PART NUMBER 产品料号	PART DESCRIPTION 产品描述	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 09MAR2021 DAVID WANG	TE Connectivity			
DIMENSIONS:		CHK 09MAR2021 GINO YAO				
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD 09MAR2021 CHRIS WANG	NAME HQ-021-M			
	0 PLC	±	PRODUCT SPEC 108-137560			
	1 PLC	±	APPLICATION SPEC 114-137560			
	2 PLC	±	WEIGHT -			
	3 PLC	±	CUSTOMER DRAWING			
MATERIAL	4 PLC	±	SIZE A200779			
	ANGLES	±	CAGE CODE 00779			
-	FINISH	-	DRAWING NO. T2080212101007			
-		-	RESTRICTED TO -			
			SCALE 2:1		SHEET 1 OF 1	REV B