



P	LTR	DESCRIPTION	DATE	DWN	APVD
	B1	ECR-15-016505	11NOV2015	DL	CW
	B2	ECR-16-018198	16JAN2017	QY	CW
	C	ECR-21-117384	09NOV2021	WQR	CW
	D	ECR-25-237972	16JUN2025	ABS	RB

- NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 400 V
RATED CURRENT: 10 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 6 KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14-2.5 mm² (26-14 AWG)
CONTACT TYPE: CRIMP CONTACT
 2. CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING: T20200X10XX000)


- 注释:
1. 技术参数:
绝缘材料: PC
额定电压: 400V
额定电流: 10A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 6 KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.14-2.5 mm² (26-14 AWG)
接线类型: 冷压接
 2. 端子需要单独订购.
(订货号参考图面: T20200X10XX000)

M3 THREAD
RECOMMENDED
TIGHTENING
TORQUE 0.5Nm
M3螺丝, 推荐锁紧力矩0.5Nm


M3 THREAD
RECOMMENDED
TIGHTENING
TORQUE 0.5Nm
M3螺丝, 推荐锁紧力矩0.5Nm

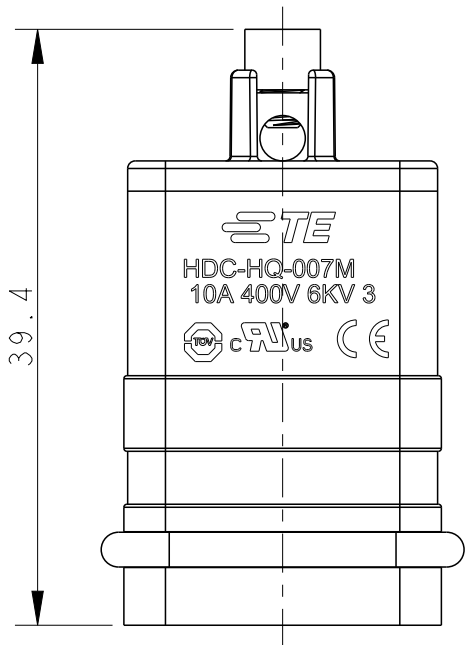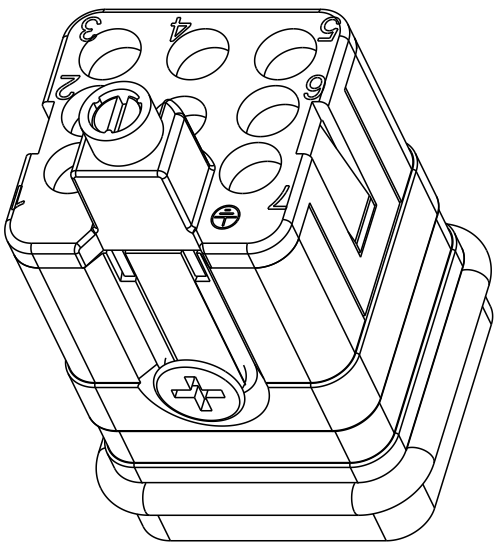


TYPE-1:T2080072101-000 TE LOGO
类 型-1:T2080072101-000 TE LOGO



GROUNDING CONTACT TYPE: SCREW CONTACT
GROUNDING CONTACT FINISH: SILVER PLATED
WIRE RANGE: 2.5mm² (AWG14)
接地端子类型: 螺丝连接端子 / 接地端子表面处理: 镀银 / 接线范围: 2.5mm² (AWG14)

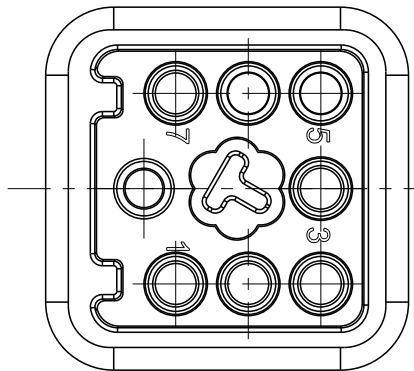

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 31MAR2015	 TE Connectivity		
		CHK CHRIS WANG 31MAR2015			
		APVD XU XIANG 31MAR2015			
		PRODUCT SPEC 108-137114			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME HQ-007-M		
		0 PLC ±-	SIZE A3		
		1 PLC ±-			
		2 PLC ±-			
		3 PLC ±-			
		4 PLC ±-	CAGE CODE -		
		ANGLES ±-			
MATERIAL -		FINISH -	DRAWING NO T2080072101000		
CUSTOMER DRAWING			SCALE 2:1	SHEET 1 OF 2	REV D






P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

ALL DIMENSIONS ARE SAME AS TYPE 1,
EXCEPT THOSE DEFINED IN THIS TYPE.
除了在本类型中定义的尺寸外，其它尺寸同类型1



NOTES:

SEE SHEET 1

注释:
见页 1

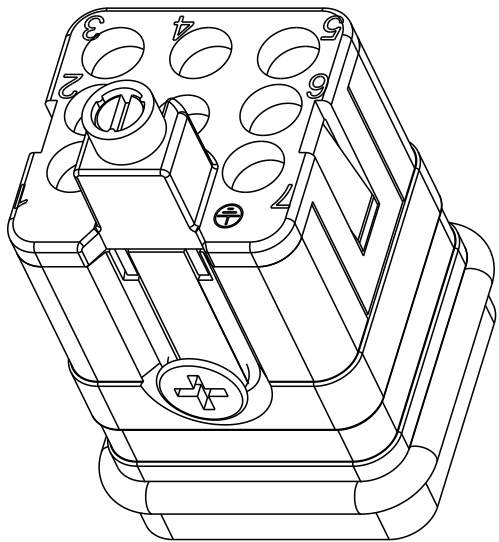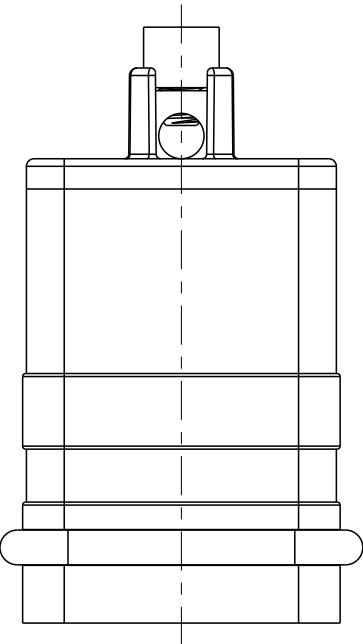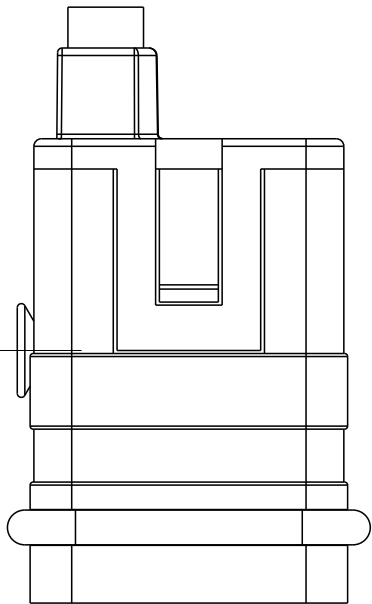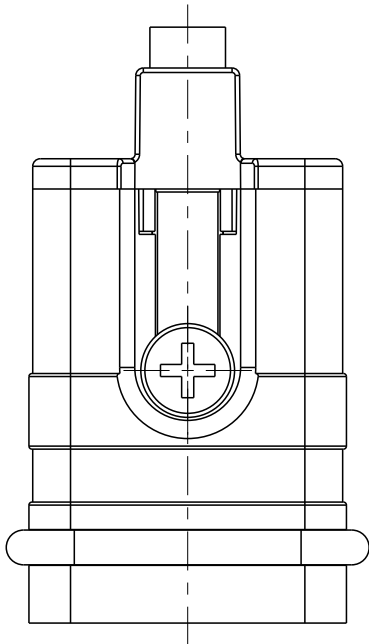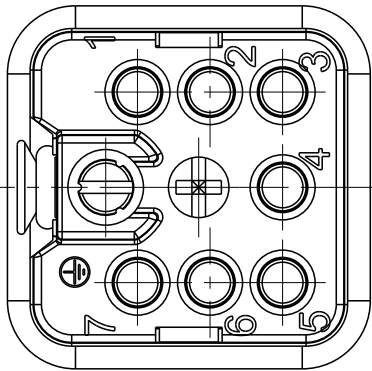


TYPE-2:T2080072101-001 STAINLESS STEEL SCREW,NO LOGO
类 型-2:T2080072101-001 不锈钢螺丝,无LOGO

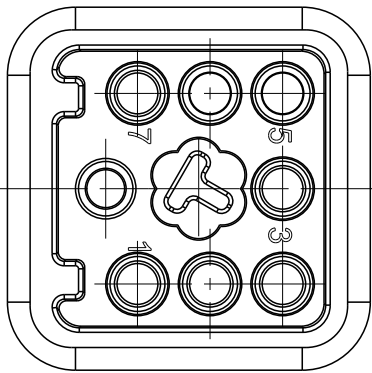

T2080072101-001	HQ-007-M	HQ-007 MALE INSERT, STAINLESS STEEL SCREW,NO LOGO HQ-007公插,不锈钢螺丝,无LOGO	TYPE-2 类 型-2
T2080072101-000	HQ-007-M	HQ-007 MALE INSERT HQ-007公插	TYPE-1 类 型-1
PART NUMBER 料 号	PART DESCRIPTION 描 述		TYPE 类 型

GROUNDING CONTACT TYPE: SCREW CONTACT
GROUNDING CONTACT FINISH: SILVER PLATED
WIRE RANGE: 2.5mm² (AWG14)
接地端子类型: 螺丝连接端子 / 接地端子表面处理: 镀银 / 接线范围: 2.5mm² (AWG14)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 31MAR2015	 TE Connectivity		
		CHK CHRIS WANG 31MAR2015			
		APVD XU XIANG 31MAR2015			
		PRODUCT SPEC 108-137114			
DIMENSIONS: mm		APPLICATION SPEC 114-137114	NAME HQ-007-M		
		WEIGHT -	SIZE A3	CAGE CODE -	DRAWING NO C-T2080072101000
MATERIAL -		FINISH -	RESTRICTED TO		
			SCALE 2:1		
			SHEET 2 OF 2		
			REV D		
			CUSTOMER DRAWING		