

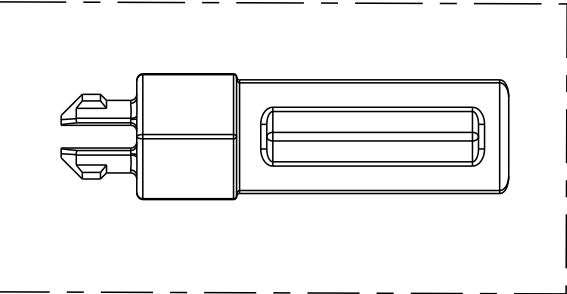
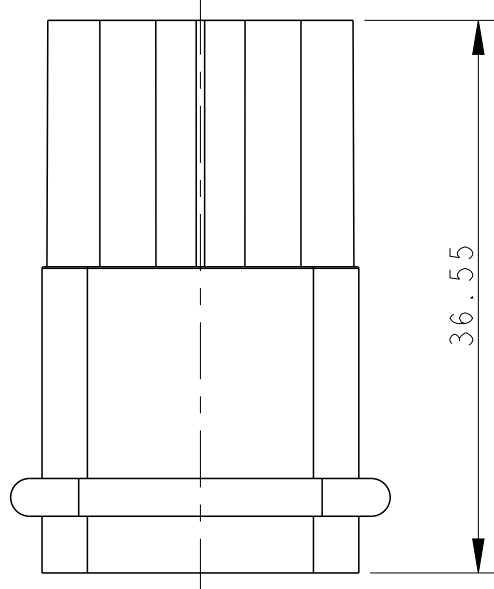
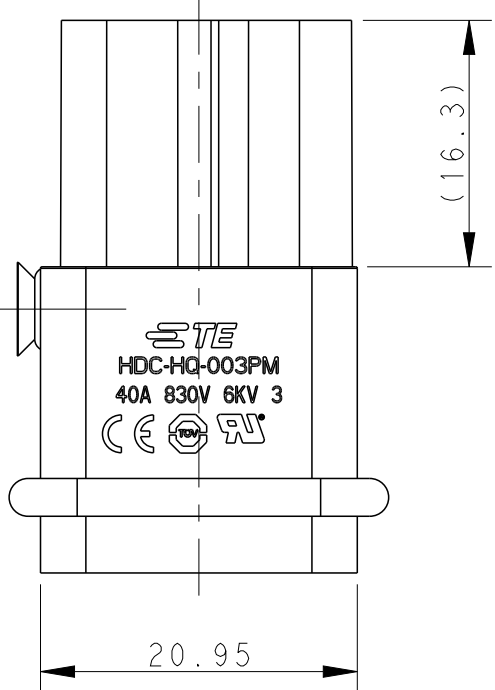
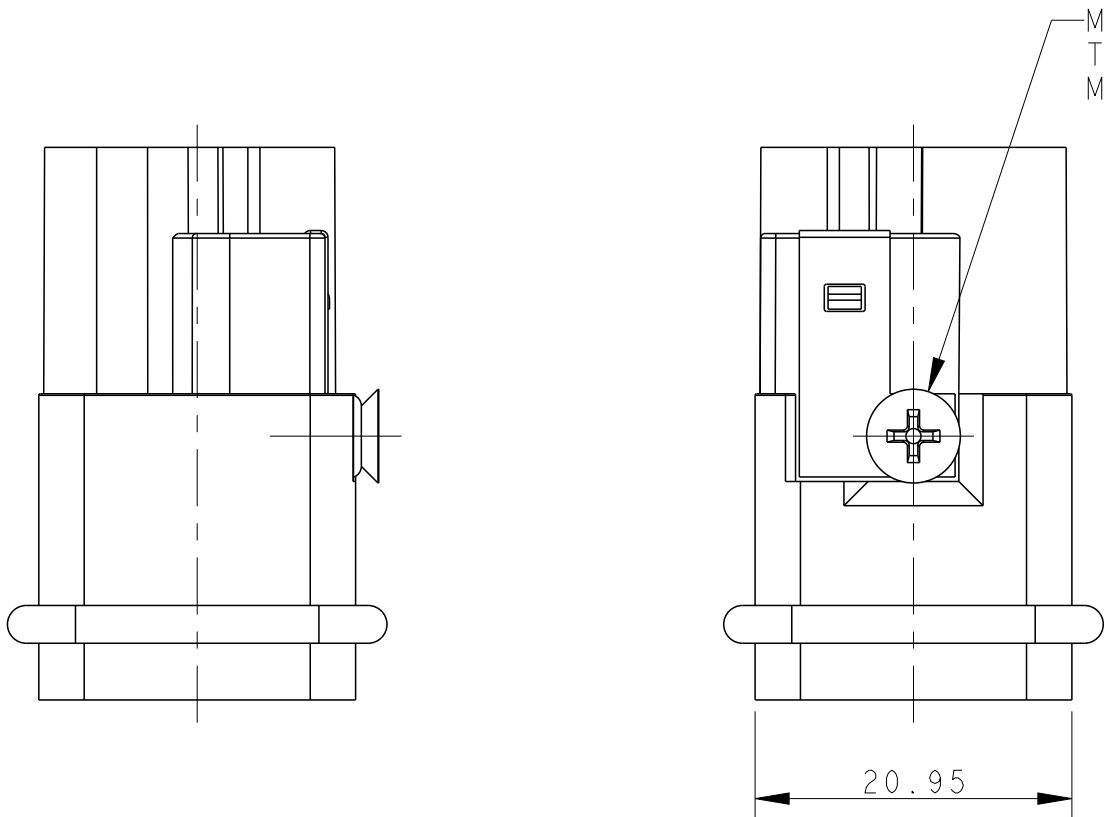
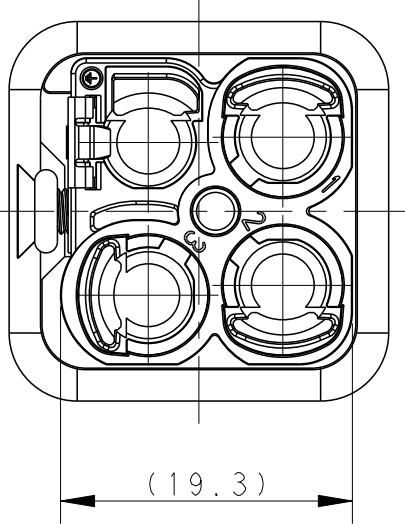


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	17NOV2021	DW	CW
	B	ECR-25-237972	16JUN2025	ABS	RB
	C	ECR-26-274021	27MAR2026	WQR	RB

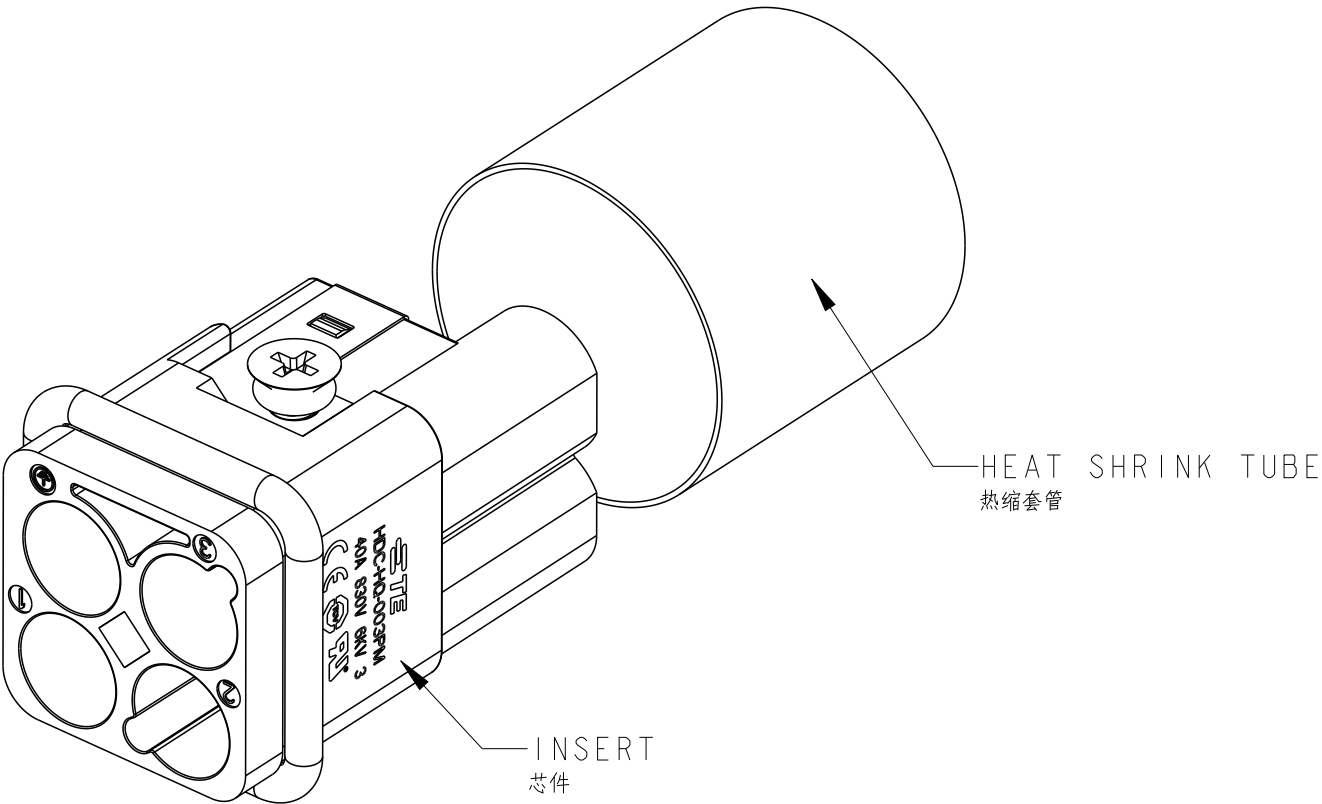

THE CODING PIN IS PACKAGED WITH PRUDUCT
编码销与产品一起包装出货

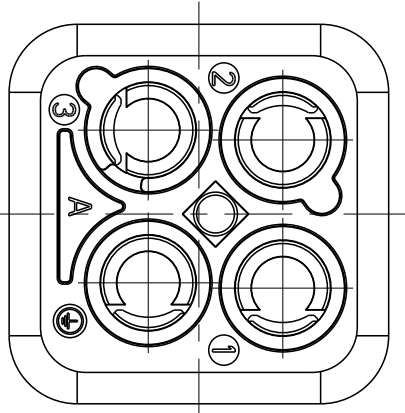

- NOTES:
- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 830V
RATED CURRENT: 40A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 6KV
POLLUTION DEGREE: 3
MATING CYCLES: 500 CYCLES
WIRE RANGE: 1.5-10 mm² (16-8 AWG)
CONTACT TYPE: CRIMP CONTACT
 - CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING: T20400X10XX000)

- 注释:
- 技术参数:
绝缘材料: PC
额定电压: 830V
额定电流: 40A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 6KV
污染等级: 3
插拔次数: 500次
接线范围: 1.5-10 mm² (16-8 AWG)
接线类型: 冷压接
 - 端子需要单独订购,
(订货号参考图面: T20400X10XX000)

T2080033101-007		HQ-003-PM		HQ-003 MALE INSERT,HV HQ-003 公插,高压款	
PART NUMBER		PART DESCRIPTION			
产 品 料 号		产 品 描 述			
QTY.	DWN 14APR2021 DAVID WANG	 TE Connectivity			
	CHK 14APR2021 GINO YAO				
UNLESS NOTIFIED:	APVD 14APR2021 CHRIS WANG	NAME HQ-003-PM			
	PRODUCT SPEC 108-137561				
	APPLICATION SPEC 114-137561				
±	WEIGHT -	SIZE A2	CAGE CODE 00779	DRAWING NO C-T2080033101007	RESTRICTED TO -
CUSTOMER DRAWING				SCALE 2:1	SHEET 1 OF 1
				REV C	