

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B1	ECR-15-016505	11NOV2015	DL	CW
	B2	ECR-16-018198	16JAN2017	QY	CW
	C	ECR-21-117384	09NOV2021	WQR	CW
	D	ECR-25-237972	16JUN2025	ABS	RB

- NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 400 V
RATED CURRENT: 10 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 6 KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14-2.5 mm² (26-14 AWG)
CONTACT TYPE: CRIMP CONTACT
 2. CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING: T20200X20XX000)

- 注释:
1. 技术参数:
绝缘材料: PC
额定电压: 400V
额定电流: 10A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 6 KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.14-2.5 mm² (26-14 AWG)
接线类型: 冷压接
 2. 端子需要单独订购.
(订货号参考图面: T20200X20XX000)

M3 THREAD
RECOMMENDED
TIGHTENING
TORQUE 0.5Nm
M3螺丝, 推荐锁紧力矩0.5Nm

M3 THREAD
RECOMMENDED
TIGHTENING
TORQUE 0.5Nm
M3螺丝, 推荐锁紧力矩0.5Nm

TYPE-1:T2080072201-000 TE LOGO
类 型-1:T2080072201-000 TE LOGO

GROUNDING CONTACT TYPE: SCREW CONTACT
GROUNDING CONTACT FINISH: SILVER PLATED
WIRE RANGE: 2.5mm² (AWG14)
接地端子类型: 螺丝连接端子 / 接地端子表面处理: 镀银 / 接线范围: 2.5mm² (AWG14)






REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-



ALL DIMENSIONS ARE SAME AS TYPE 1,
EXCEPT THOSE DEFINED IN THIS TYPE.
除了在本类型中定义的尺寸外，其它尺寸同类型1

NOTES:
SEE SHEET 1

注释:
见页 1

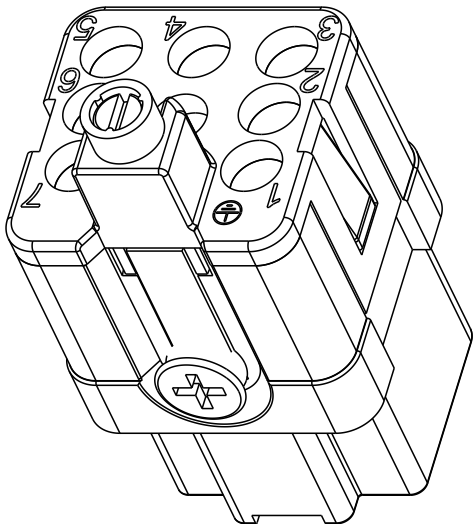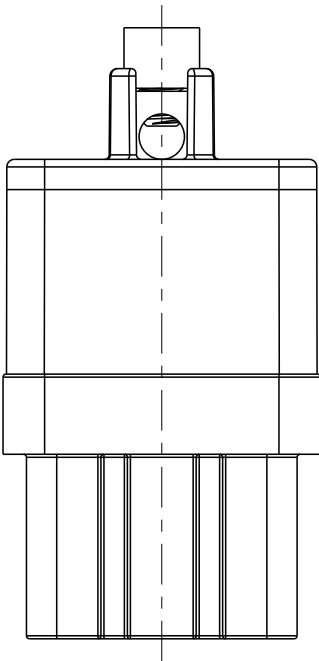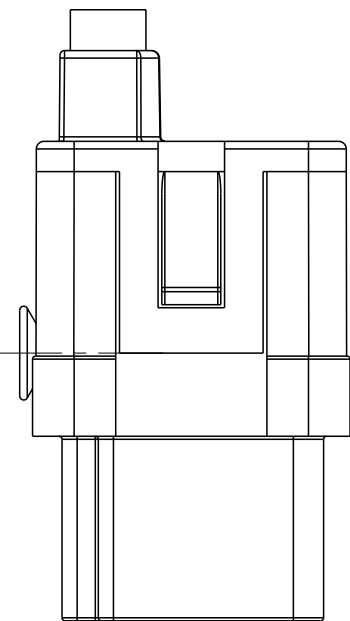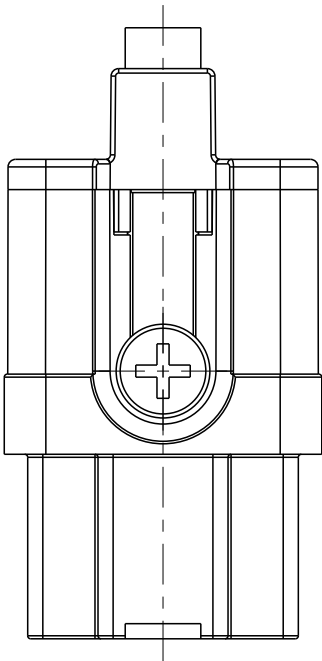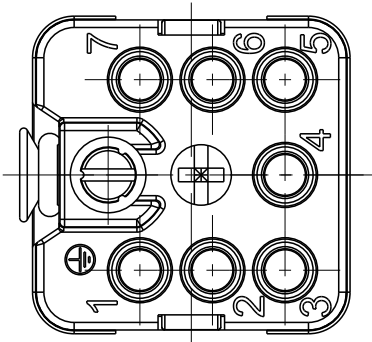


TYPE-2:T2080072201-001 STAINLESS STEEL SCREW,NO LOGO
类 型-2:T2080072201-001 不锈钢螺丝,无LOGO

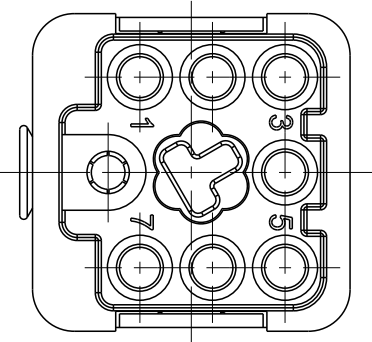

GROUNDING CONTACT TYPE: SCREW CONTACT
GROUNDING CONTACT FINISH: SILVER PLATED
WIRE RANGE: 2.5mm² (AWG14)
接地端子类型: 螺丝连接端子 / 接地端子表面处理: 镀银 / 接线范围: 2.5mm² (AWG14)

T2080072201-001	HQ-007-F	HQ-007 FEMALE INSERT, STAINLESS STEEL SCREW,NO LOGO HQ-007母插,不锈钢螺丝,无LOGO	TYPE-2 类 型-2
T2080072201-000	HQ-007-F	HQ-007 FEMALE INSERT HQ-007母插	TYPE-1 类 型-1
PART NUMBER 料 号	PART DESCRIPTION 描 述		TYPE 类 型

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 31MAR2015	TE Connectivity									
		CHK CHRIS WANG 31MAR2015										
		APVD XU XIANG 31MAR2015										
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME HQ-007-F									
		0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-										
MATERIAL - -		FINISH - -	PRODUCT SPEC 108-137114		APPLICATION SPEC 114-137114		SIZE A3		CAGE CODE -	DRAWING NO C-T2080072201000	RESTRICTED TO	
CUSTOMER DRAWING						SCALE 2:1		SHEET 2 OF 2		REV D		