

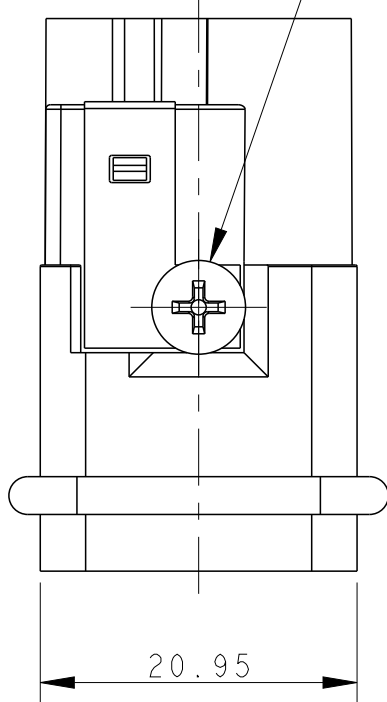
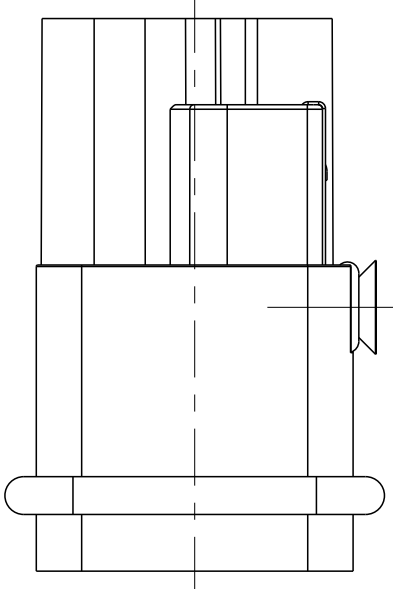
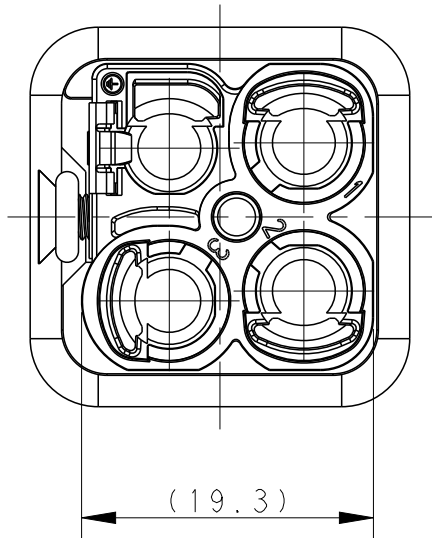
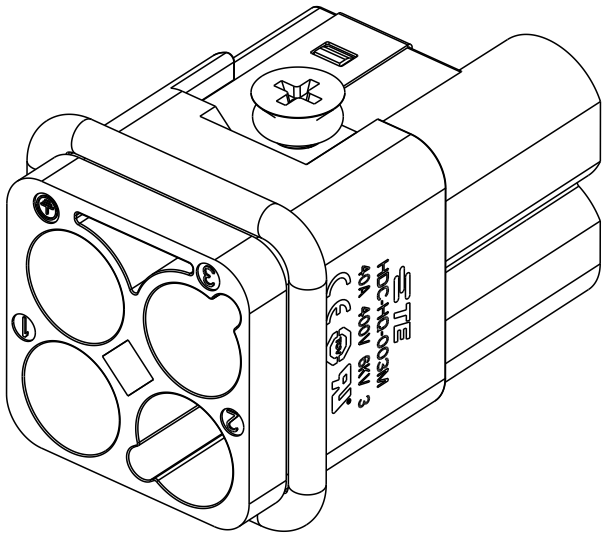
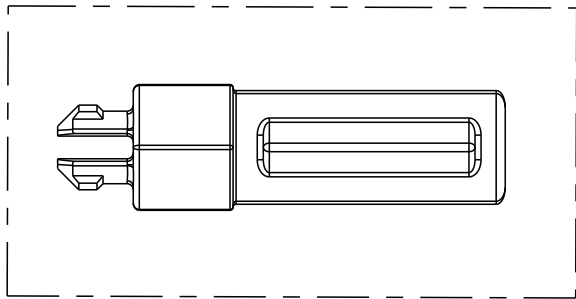



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	14APR2021	DW	CW
	A1	ECR-21-121080	17NOV2021	DW	CW
	B	ECR-25-237972	16JUN2025	ABS	RB
	C	ECR-26-274021	27MAR2026	WQR	RB

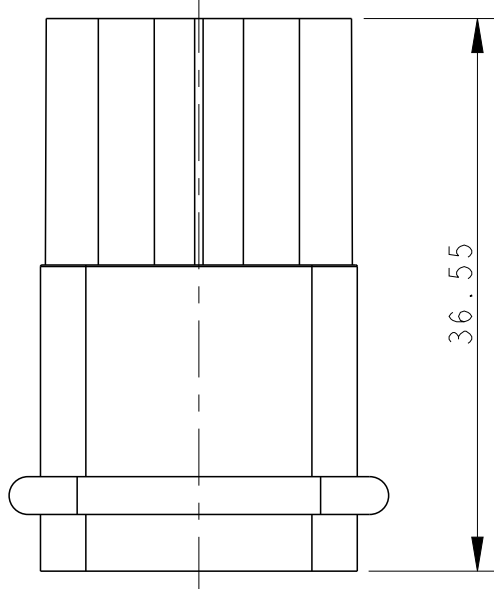

M3 SCREW, RECOMMENDED
TIGHTENING TORQUE 0.5Nm
M3螺丝, 推荐扭力矩为0.5Nm

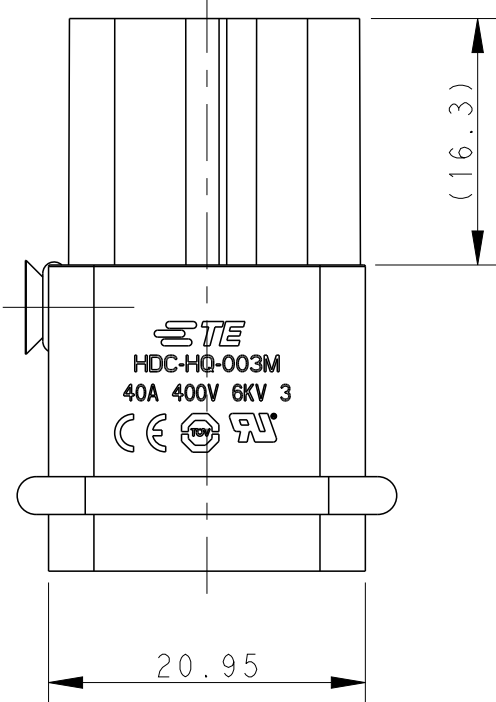

THE CODING PIN IS PACKAGED WITH
PRDUCT
编码销与产品一起包装出货

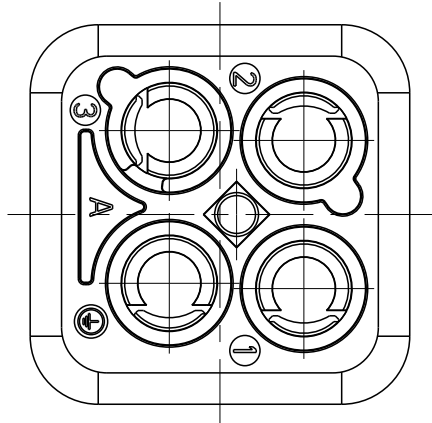

- NOTES:
- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 400V
RATED CURRENT: 40A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 6KV
POLLUTION DEGREE: 3
MATING CYCLES: 500 CYCLES
WIRE RANGE: 1.5-10 mm² (16-8 AWG)
CONTACT TYPE: CRIMP CONTACT
 - CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING: T20400X10XX000)

- 注释:
- 技术参数:
绝缘材料: PC
额定电压: 400V
额定电流: 40A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 6KV
污染等级: 3
插拔次数: 500次
接线范围: 1.5-10 mm² (16-8 AWG)
接线类型: 冷压接
 - 端子需要单独订购.
(订货号参考图面: T20400X10XX000)

T2080032101-007	HQ-003-M	HQ-003 MALE INSERT HQ-003 公插
PART NUMBER 产品料号	PART DESCRIPTION 产品描述	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 14APR2021 DAVID WANG	TE Connectivity			
		CHK 14APR2021 GINO YAO				
		APVD 14APR2021 CHRIS WANG	NAME HQ-003-M			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC 108-137561			
		0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±	APPLICATION SPEC 114-137561			
MATERIAL -		FINISH -	WEIGHT -			
			CUSTOMER DRAWING			
			SCALE 2:1	SHEET 1 OF 1	REV C	