
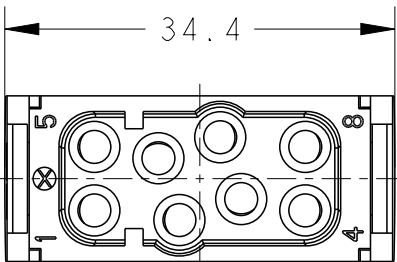
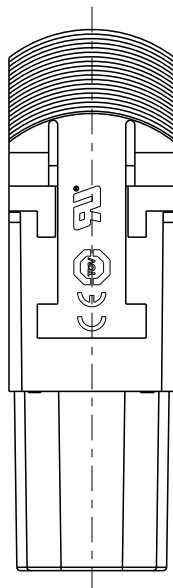
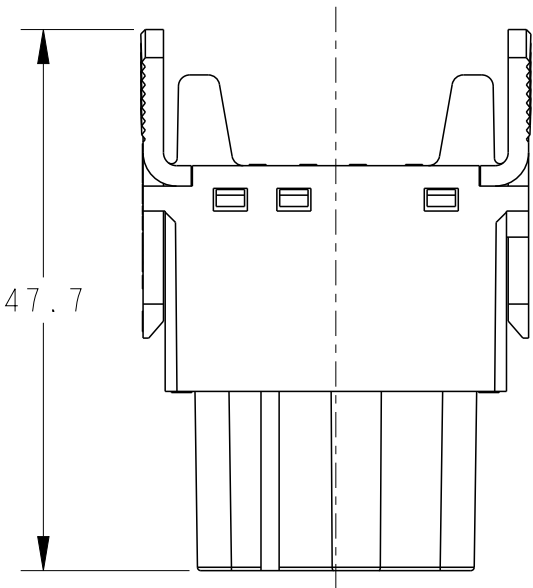
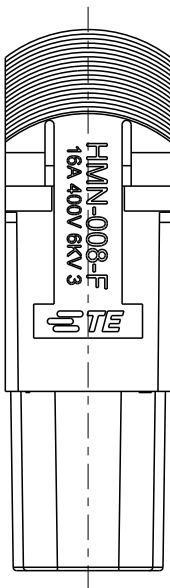
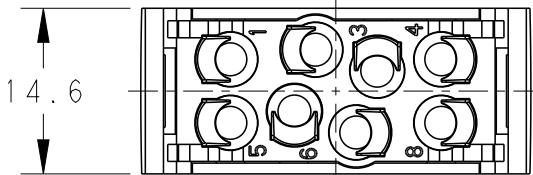


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	25MAR2015	DW	CW
	B	ECR-15-018270	07DEC2015	DW	CW
	C	ECR-21-111798	27SEP2021	WQR	CW
	D	ECR-25-237961	12JUN2025	ABS	RB

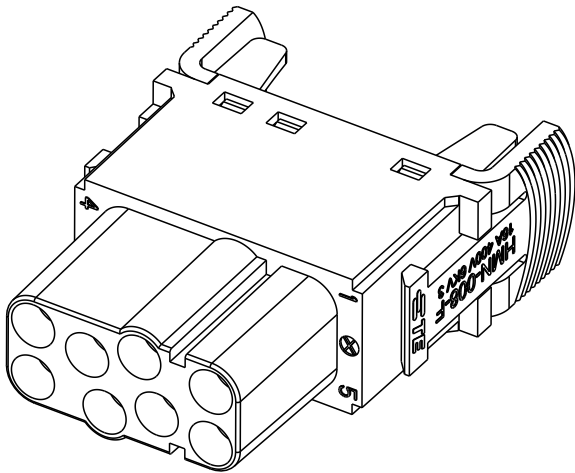

- NOTES:
- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 400V
RATED CURRENT: 16A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 6KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
OPERATION TEMPERATURE: $-40\sim+125^{\circ}C$
WIRE RANGE: $0.14\sim 4\text{ mm}^2$ (26~12 AWG)
CONTACT TYPE: CRIMP CONTACT
 - CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING:T20300X20XX000)

- 注释:
- 技术参数:
绝缘材料: PC
额定电压: 400V
额定电流: 16A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 6KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
工作温度: $-40\sim+125^{\circ}C$
接线范围: $0.14\sim 4\text{ mm}^2$ (26~12 AWG)
接线类型: 冷压接
 - 端子需要单独订购.
(订货号参考图面: T20300X20XX000)

HMN-008-F	T2111082201-000
DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN David Wang 25MAR2015	 TE Connectivity		
		CHK Chris.Wang 25MAR2015			
		APVD Xiang.Xu 25MAR2015			
		PRODUCT SPEC 108-137061			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME HMN-008-F		
		0 PLC ± 0.1 1 PLC ± 0.15 2 PLC ± 0.2 3 PLC ± 0.25 4 PLC ± 0.3 ANGLES ± 0.5	APPLICATION SPEC 114-137061		
MATERIAL -		FINISH -	WEIGHT -		
			CUSTOMER DRAWING		
			SCALE 3:2	SHEET 1 OF 1	REV D