
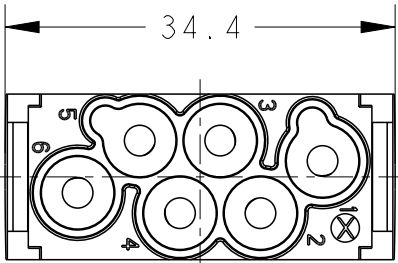
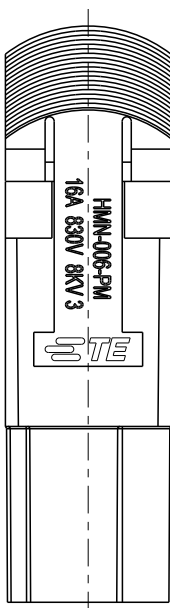
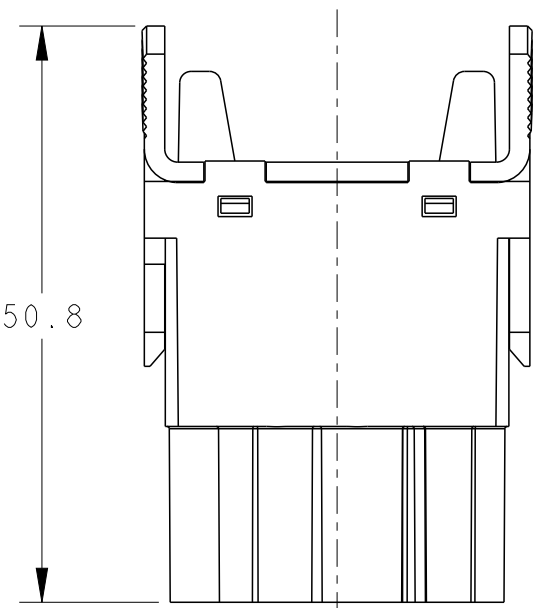
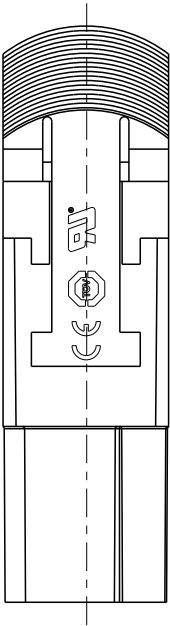
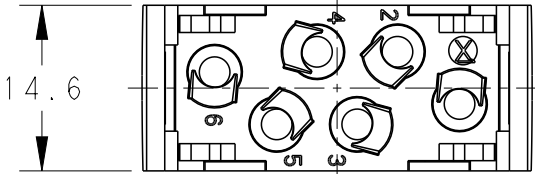


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	16APR2015	DW	CW
	B	ECR-15-018270	09DEC2015	DW	CW
	C	ECR-21-111798	27SEP2021	WQR	CW
	D	ECR-25-237961	13JUN2025	ABS	RB

- NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 830V
RATED CURRENT: 16A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 8KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
OPERATION TEMPERATURE: $-40\sim+125^{\circ}C$
WIRE RANGE: $0.14\sim 4\text{ mm}^2$ (26~12 AWG)
CONTACT TYPE: CRIMP CONTACT
2. CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING:T20300X10XX000)

- 注释:
1. 技术参数:
绝缘材料: PC
额定电压: 830V
额定电流: 16A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 8KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
工作温度: $-40\sim+125^{\circ}C$
接线范围: $0.14\sim 4\text{ mm}^2$ (26~12 AWG)
接线类型: 冷压接
2. 端子需要单独订购.
(订货号参考图面: T20300X10XX000)

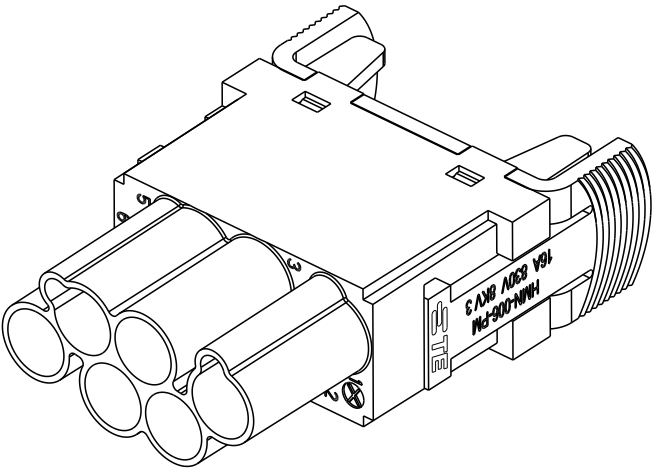

HMN-006-PM	T2111063101-000
DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	16APR2015	 TE Connectivity		
		CHK	16APR2015			
		APVD	16APR2015			
		PRODUCT SPEC	108-137120			
		APPLICATION SPEC	114-137120	NAME HMN-006-PM		
		WEIGHT	-			
		CUSTOMER DRAWING	SCALE 3:2			RESTRICTED TO
			SHEET 1 OF 1			REV D