


P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-15-018270	09DEC2015	DW	CW
	B1	ECR-16-006849	13MAY2016	RL	CW
	C	ECR-21-111798	28SEP2021	WQR	CW
	D	ECR-25-237961	13JUN2025	ABS	RB





- NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250V
RATED CURRENT: 10A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 4KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
OPERATION TEMPERATURE: $-40\sim+125^{\circ}C$
WIRE RANGE: $0.14\sim 2.5\text{ mm}^2$ (26~14 AWG)
CONTACT TYPE: CRIMP CONTACT
 2. CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING: T20200X10XX000)

- 注释:
1. 技术参数:
绝缘材料: PC
额定电压: 250V
额定电流: 10A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 4KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
工作温度: $-40\sim+125^{\circ}C$
接线范围: $0.14\sim 2.5\text{ mm}^2$ (26~14 AWG)
接线类型: 冷压接
 2. 端子需要单独订购.
(订货号参考图面: T20200X10XX000)

T2111122101-001	HMN-012-M WITHOUT LOGO HMN-012模块公插 不带LOGO, 产品型号和认证标示
T2111122101-000	HMN-012-M WITH LOGO HMN-012模块公插
PART NUMBER 料号	PART DESCRIPTION 描述

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 14APR2015 David Wang	 TE Connectivity		
		CHK 14APR2015 Chris.Wang			
		APVD 14APR2015 Xiang Xu	NAME HMN-012-M		
		PRODUCT SPEC 108-137121			
		APPLICATION SPEC 114-137121			
		WEIGHT -	SIZE A3	CAGE CODE 00779	DRAWING NO. T2111122101000
		CUSTOMER DRAWING	SCALE 1:1	SHEET 1 OF 1	REV D

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
mm			
	0 PLC	±0	
	1 PLC	±0	
	2 PLC	±0	
	3 PLC	±0	
	4 PLC	±0	
ANGLES		±0	
MATERIAL		FINISH	
-		-	
-		-	

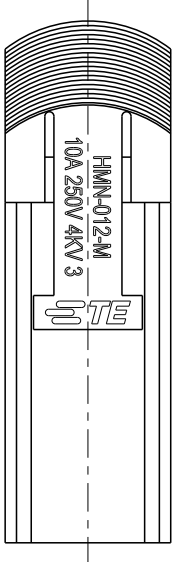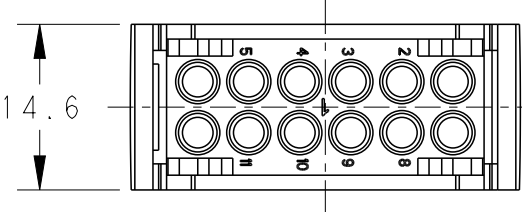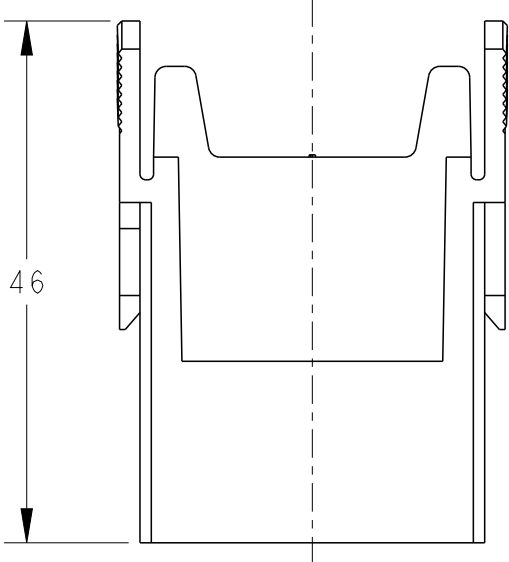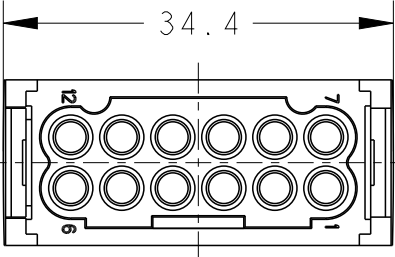

T2111122101-000 SHOWN,
带 LOGO, 产品型号, 认证标示

T2111122101-001 SHOWN, ALL DIMENSIONS ARE
SAME AS T2111122101-000, EXCEPT WITHOUT LOGO,
TYPE DESCRIPTION, TUV AND CUL MARK
不带 LOGO, 产品型号和认证标示

