
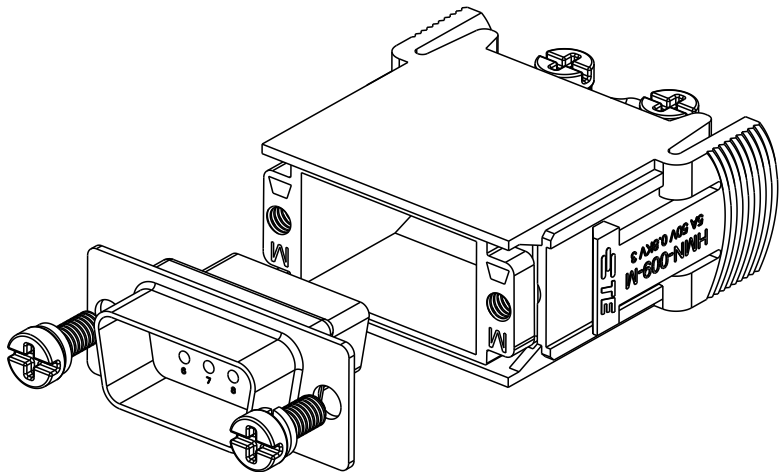
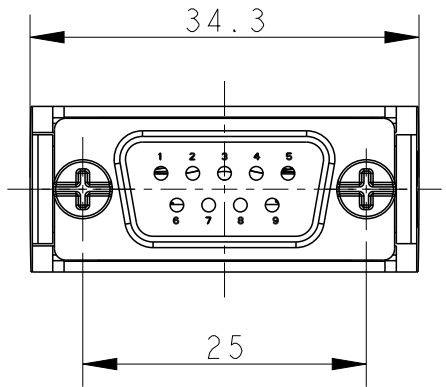
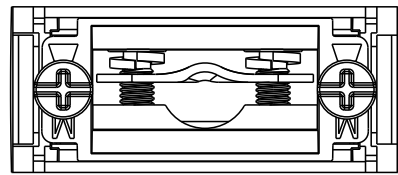
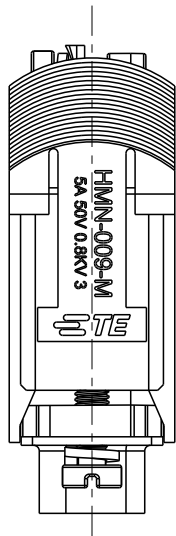
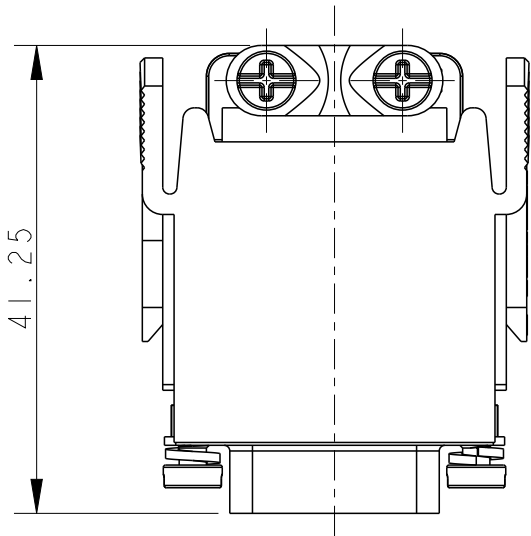
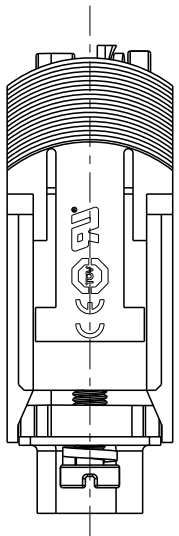
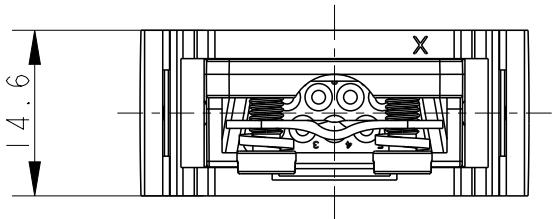



P	LTR	DESCRIPTION	DATE	DWN	APVD
	B2	ECR-19-000492	23JAN2019	AL	CW
	C	ECR-19-004179	24APR2019	AL	CW
	D	ECR-21-111798	27SEP2021	WQR	CW
	E	ECR-25-237961	13JUN2025	ABS	RB

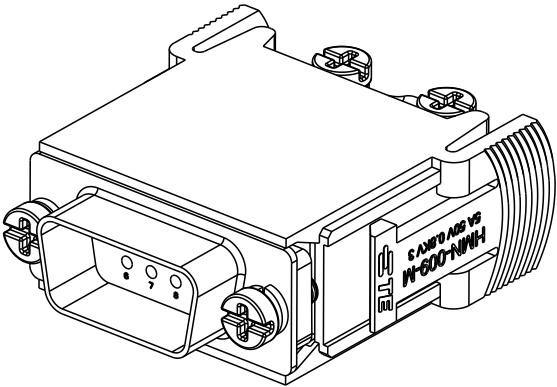

- NOTES:
- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 50V
RATED CURRENT: 5A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 0.8KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.08~0.52 mm² (28~20 AWG)
CONTACT TYPE: CRIMP CONTACT
 - CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING:T20700X10XX000)

- 注释:
- 技术参数:
绝缘材料: PC
额定电压: 50V
额定电流: 5A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 0.8KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.08~0.52 mm² (28~20 AWG)
接线类型: 冷压接
 - 端子需要单独订购.
(订货号参考图面: T20700X10XX000)

T2111092101-000	HMN-009-M	HMN-009 MALE MODULE INSERT HMN-009模块公插
PART NUMBER 料号	PART DESCRIPTION 描述	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 24MAR2015 David Wang	 TE Connectivity		
		CHK 24MAR2015 Chris.Wang			
		APVD 24MAR2015 Xiang.Xu			
		PRODUCT SPEC 108-137064			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME HMN-009-M		
		0 PLC ±-	SIZE CAGE CODE DRAWING NO RESTRICTED TO		
		1 PLC ±-			
		2 PLC ±-			
		3 PLC ±-			
		4 PLC ±-	A300779C-T2111092101000		
		ANGLES ±-			
MATERIAL		FINISH	SCALE 3:2 SHEET 1 OF 1 REV E		
			CUSTOMER DRAWING		