
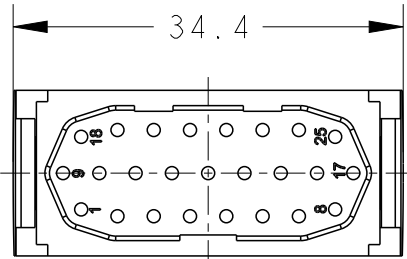
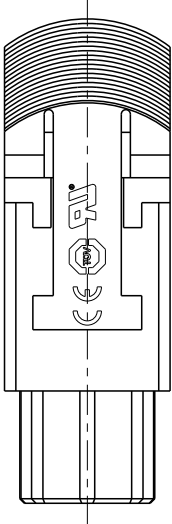
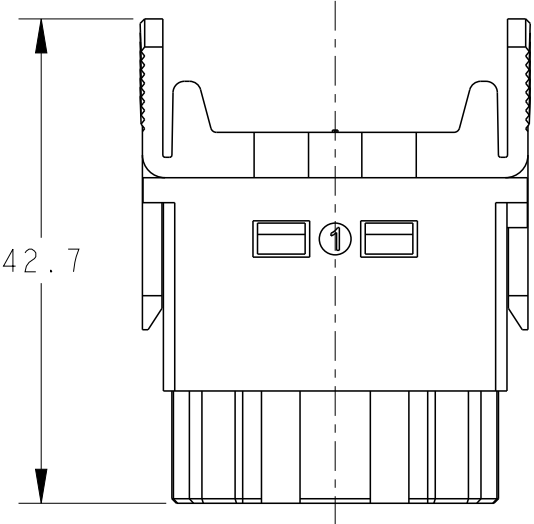
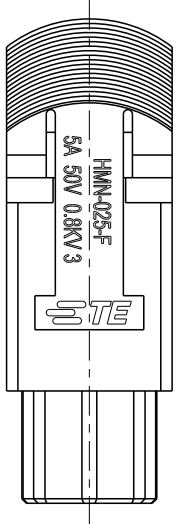
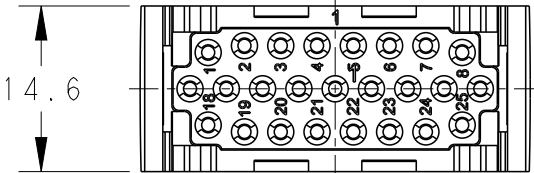


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	14APR2015	DW	CW
	B	ECR-15-018270	10DEC2015	DW	CW
	C	ECR-21-111798	06OCT2021	WQR	CW
	D	ECR-25-237961	13JUN2025	ABS	RB

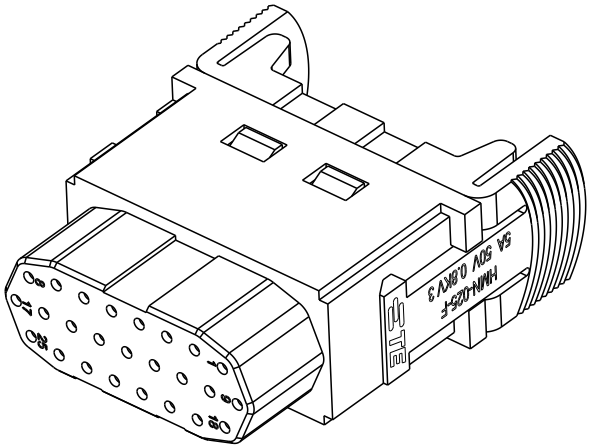

- NOTES:
- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 50V
RATED CURRENT: 5A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 0.8KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
OPERATION TEMPERATURE: $-40\sim+125^{\circ}C$
WIRE RANGE: 0.08~0.52 mm² (28~20 AWG)
CONTACT TYPE: CRIMP CONTACT
 - CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING:T20700X20XX000)

- 注释:
- 技术参数:
绝缘材料: PC
额定电压: 50V
额定电流: 5A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 0.8KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
工作温度: $-40\sim+125^{\circ}C$
接线范围: 0.08~0.52 mm² (28~20 AWG)
接线类型: 冷压接
 - 端子需要单独订购.
(订货号参考图面: T20700X20XX000)

HMN-025-F	T2111252201-000
DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN David Wang 13APR2015	 TE Connectivity				
		CHK Chris. Wang 13APR2015					
		APVD Xiang Xu 13APR2015					
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME HMN-025-F				
	0 PLC	±-	PRODUCT SPEC	SIZE CAGE CODE DRAWING NO			RESTRICTED TO
	1 PLC	±-	108-137122				
	2 PLC	±-	APPLICATION SPEC				
	3 PLC	±-	114-137122	A300779C-T2111252201000			-
	4 PLC	±-	WEIGHT				
MATERIAL		FINISH	CUSTOMER DRAWING				
-	-	-	SCALE 3:2 SHEET 1 OF 1 REV D				
-	-	-					