
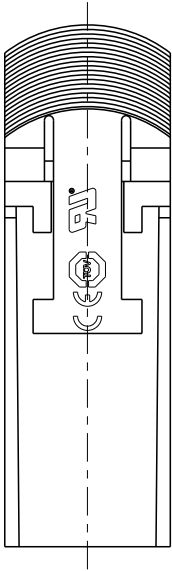
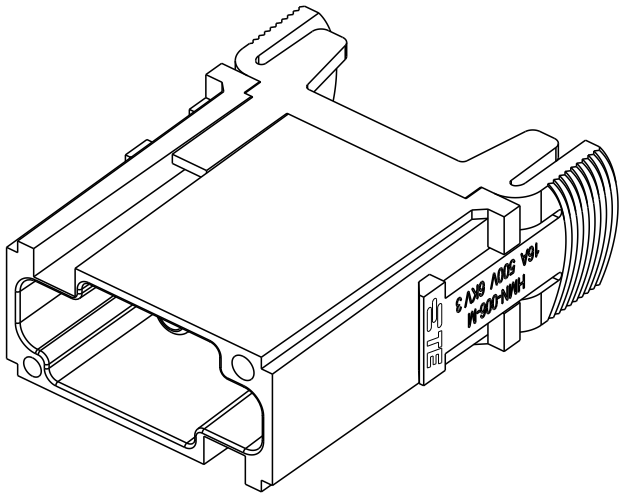
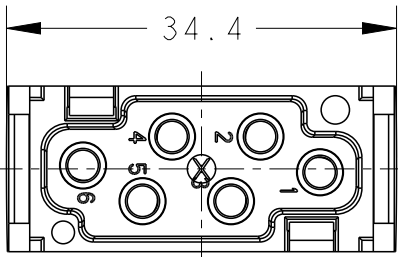
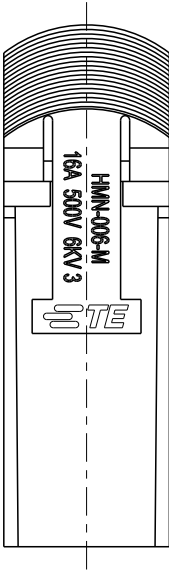
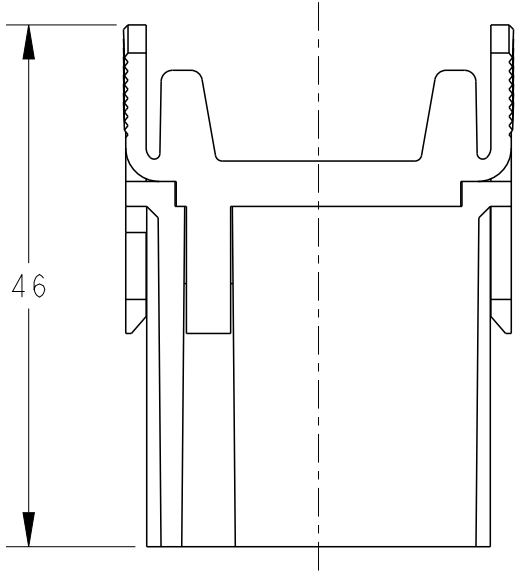



P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-15-018270	09DEC2015	DW	CW
	BI	ECR-16-018198	28DEC2016	QY	CW
	C	ECR-21-111798	27SEP2021	WQR	CW
	D	ECR-25-237961	13JUN2025	ABS	RB

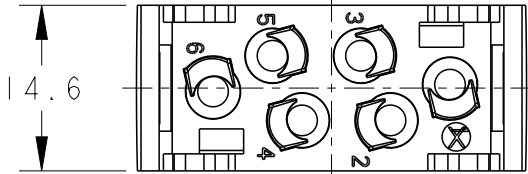

TYPE-1:T2111062101-000 TE LOGO
类 型-1:T2111062101-000 TE LOGO

- NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 500V
RATED CURRENT: 16A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 6KV
POLLUTION DEGREE: 3
CONTACT RESISTANCE: $\leq 5m\Omega$
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14~4 mm² (26~12 AWG)
CONTACT TYPE: CRIMP CONTACT
 2. CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING:T20300X10XX000)





- 注释:
1. 技术参数:
绝缘材料: PC
额定电压: 500V
额定电流: 16A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 6KV
污染等级: 3
接触电阻: $\leq 5m\Omega$
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.14~4 mm² (26~12 AWG)
接线类型: 冷压接
 2. 端子需要单独订购.
(订货号参考图面: T20300X10XX000)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	15APR2015	 TE Connectivity		
		CHK	15APR2015			
		APVD	15APR2015			
		PRODUCT SPEC				
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		
mm				HMN-006-M		
		0 PLC	±-	SIZE		
		1 PLC	±-			
		2 PLC	±-			
		3 PLC	±-			
		4 PLC	±-	CAGE CODE		
		ANGLES	±-			
		FINISH				
MATERIAL				DRAWING NO		
				RESTRICTED TO		
				A300779		
				G-T2111062101000		
				SCALE		
				3:2		
				SHEET		
				1 OF 2		
				REV		
				D		
				CUSTOMER DRAWING		



REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

NOTES:
SEE SHEET 1
注释:
见页 1

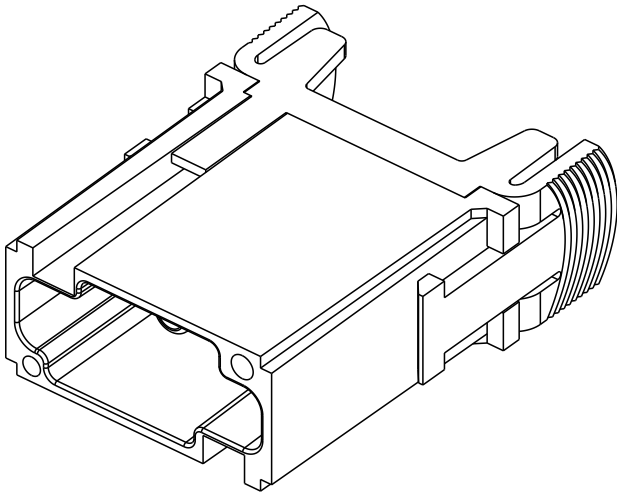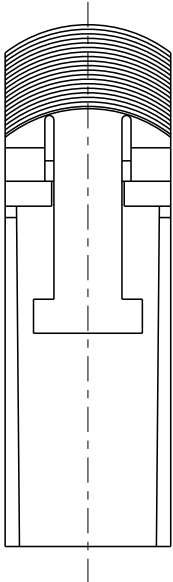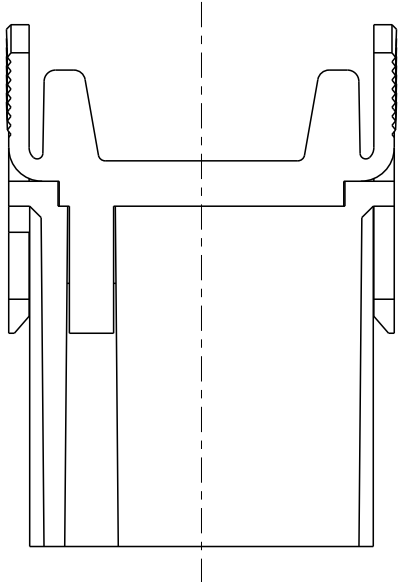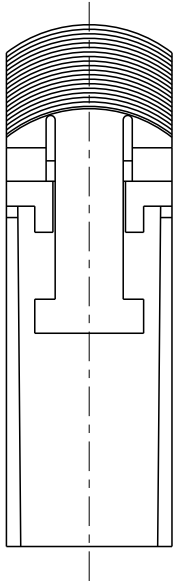


TYPE-2:T2111062101-001 NO LOGO
类 型-2:T2111062101-001 无LOGO

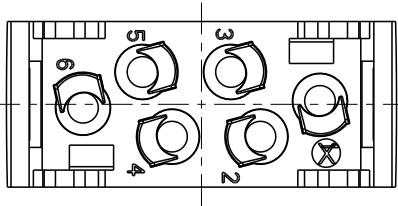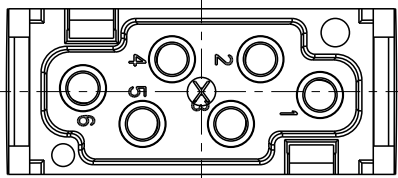

ALL DIMENSIONS ARE SAME AS TYPE 1,
EXCEPT THOSE DEFINED IN THIS TYPE.
除了在本类型中定义的尺寸外，其它尺寸同类型 |

T2111062101-001	HMN-006-M	HMN-006 MALE MODULE INSERT, NO LOGO HMN-006 模块公插, 无LOGO	TYPE-2 类 型-2
T2111062101-000	HMN-006-M	HMN-006 MALE MODULE INSERT HMN-006 模块公插	TYPE-1 类 型-1
PART NUMBER 料 号	PART DESCRIPTION 描 述		TYPE 类 型

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN David Wang 15APR2015	 TE Connectivity																
		CHK Chris.Wang 15APR2015																	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: <table><tr><td>0 PLC</td><td>±-</td></tr><tr><td>1 PLC</td><td>±-</td></tr><tr><td>2 PLC</td><td>±-</td></tr><tr><td>3 PLC</td><td>±-</td></tr><tr><td>4 PLC</td><td>±-</td></tr><tr><td>ANGLES</td><td>±-</td></tr></table>	0 PLC	±-	1 PLC	±-	2 PLC	±-	3 PLC	±-	4 PLC	±-	ANGLES	±-	APVD Xiang.Xu 15APR2015	NAME HMN-006-M				
0 PLC		±-																	
1 PLC		±-																	
2 PLC		±-																	
3 PLC		±-																	
4 PLC	±-																		
ANGLES	±-																		
	PRODUCT SPEC 108-137120	SIZE A3																	
	APPLICATION SPEC 114-137120						CAGE CODE 00779												
MATERIAL - -	FINISH - -	WEIGHT -	DRAWING NO C-T2111062101000																
CUSTOMER DRAWING			SCALE 3:2		SHEET 2 OF 2		REV D												