



P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-15-018270	07DEC2015	DW	CW
	B1	ECR-18-018974	08DEC2018	WQR	CW
	C	ECR-21-111798	18SEP2021	WQR	CW
	D	ECR-25-237961	11JUN2025	ABS	RB



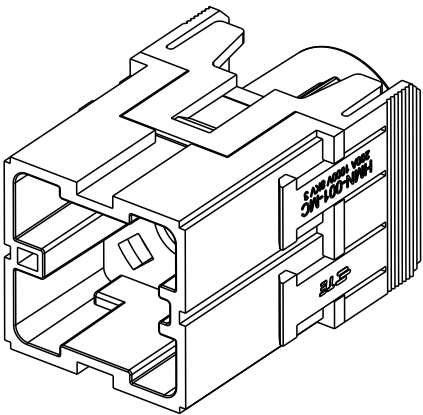


T2111013101-000 SHOWN

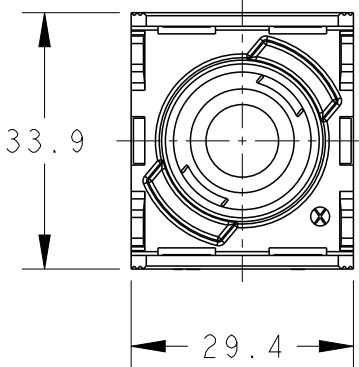


NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 1000V
RATED CURRENT: 200A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 8KV
POLLUTION DEGREE: 3
CONTACT RESISTANCE: $\leq 0.5m\Omega$
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 25mm²~70mm²
CONTACT TYPE: CRIMP TYPE.

注释:
1. 技术参数:
绝缘材料: PC
额定电压: 1000V
额定电流: 200A
绝缘电阻: $\geq 400M\Omega$
脉冲电压: 8KV
污染等级: 3
接触电阻: $\leq 0.5m\Omega$
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 25mm²~70mm²
接线类型: 压接

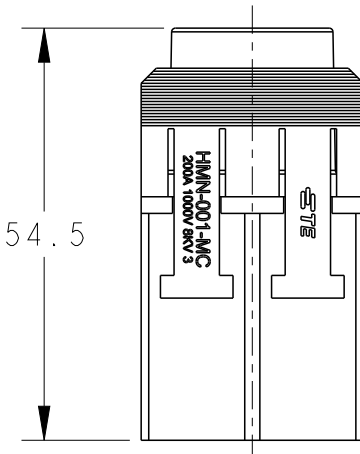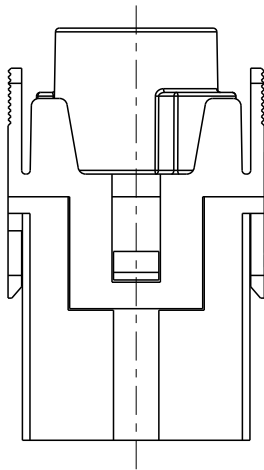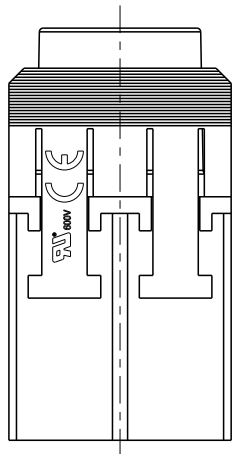


T2111013101-000:WITH TE LOGO
T2111013101-000:带TE LOGO

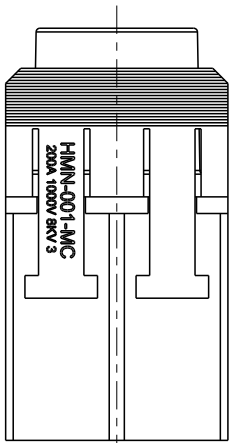

T2111013101-001: WITHOUT LOGO
T2111013101-001: 不带LOGO

T2111013101-001	HMN-001-MC	HMN-001 MALE MODULE INSERT,CRIMPING,NO LOGO HMN-001冷压模块公插,无LOGO
T2111013101-000		HMN-001 MALE MODULE INSERT,CRIMPING HMN-001冷压模块公插

PART NUMBER 料 号	PART DESCRIPTION 描 述
--------------------	-------------------------

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 18MAR2015 David Wang	 TE Connectivity		
DIMENSIONS: mm		CHK 18MAR2015 Chris.Wang			
		APVD 18MAR2015 Xiang.Xu			
		PRODUCT SPEC 108-137057			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC 114-137057	NAME HMN-001-MC		
0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-		WEIGHT -			
MATERIAL -		CUSTOMER DRAWING	SIZE A3	CAGE CODE 00779	RESTRICTED TO -
FINISH -			DRAWING NO. T2111013101000	SHEET 1 OF 1	REV D
			SCALE 1:1		