
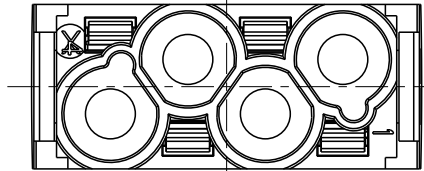
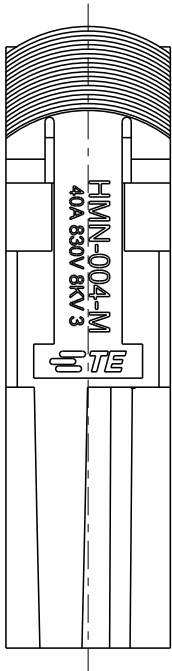
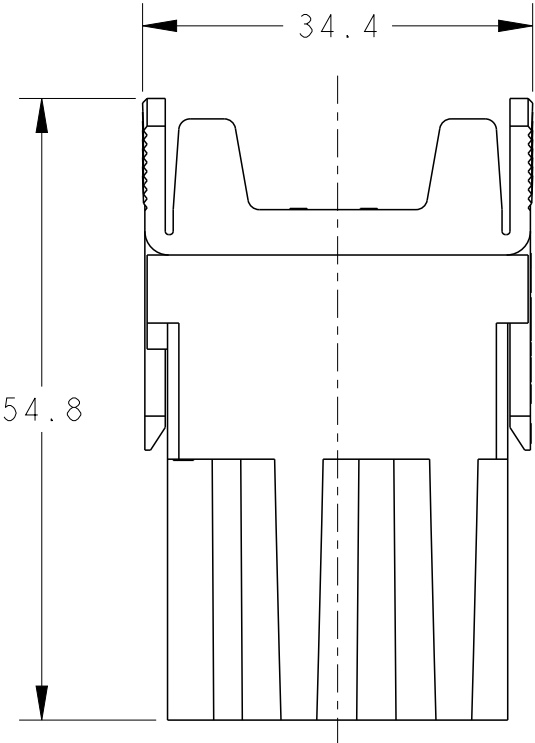
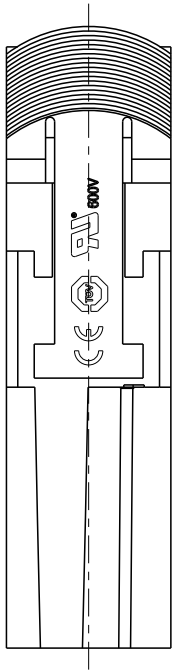
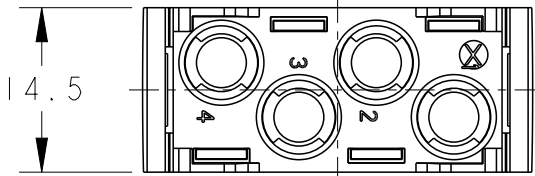


P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-15-018270	07DEC2015	DW	CW
	C	ECR-21-111798	23SEP2021	WQR	CW
	CI	ECR-23-181096	18JUL2023	BS	CW
	D	ECR-25-237961	13JUN2025	ABS	RB

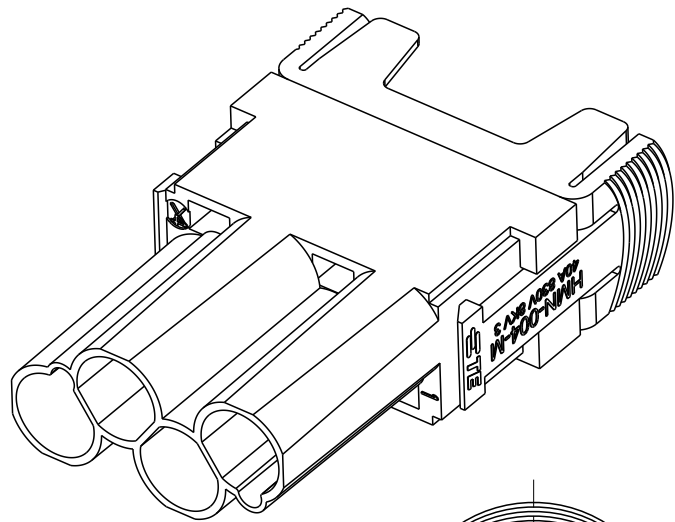

NOTES:

- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 830V
RATED CURREN3T: 40A
INSULATION RESISTANCE: >=400MΩ
RATED IMPULSE VOLTAGE: 8KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
OPERATION TEMPERATURE: -40°C~+125°C
WIRE RANGE: 1.0~6.0mm² / 8AWG(10mm²)
CAUTION, INSULATOR OF 8AWG(10mm²) CABLE <= Ø6.1mm.
BREAK THE INSERT TO REMOVE 8AWG(10mm²) CONTACTS.
- CONTACT TYPE: CRIMP CONTACT
CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING:T20400X10XX000)


注释:

- 技术参数:
绝缘材料: PC
额定电压: 830V
额定电流: 40A
绝缘电阻: >=400MΩ
脉冲电压: 8KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
工作温度: -40°C~+125°C
接线范围: 1.0~6.0mm² / 8AWG(10mm²)
注意, 8AWG(10mm²) 线缆绝缘直径<= Ø6.1mm.
退出8AWG(10mm²) 针时需要破坏芯件.
接线类型: 冷压接
- 端子需要单独订购.
(订货号参考图面: T20400X10XX000)

T2111042101-000	HMN-004-M	HMN-004 MALE MODULE INSERT HMN-004模块公插
-----------------	-----------	---

PART NUMBER 料 号	PART DESCRIPTION 描 述
--------------------	-------------------------

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN David Wang 20MAR2015	 TE Connectivity		
		CHK Chris.Wang 20MAR2015			
		APVD Xiang.Xu 20MAR2015			
		PRODUCT SPEC 108-137060			
		APPLICATION SPEC 114-137060	NAME HMN-004-M		
		WEIGHT -			
CUSTOMER DRAWING		SCALE 3:2	SHEET 1	OF 1	REV D

DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
		0 PLC ±-	
		1 PLC ±-	
		2 PLC ±-	
		3 PLC ±-	
		4 PLC ±-	
		ANGLES ±-	
MATERIAL -		FINISH -	