
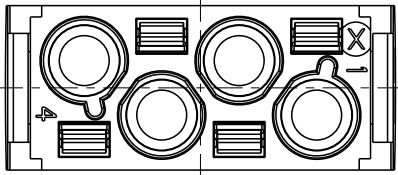
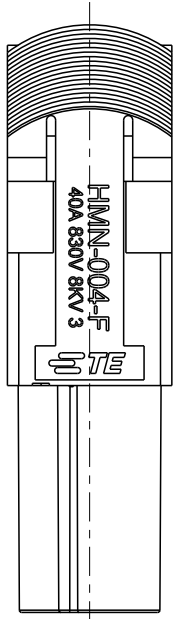
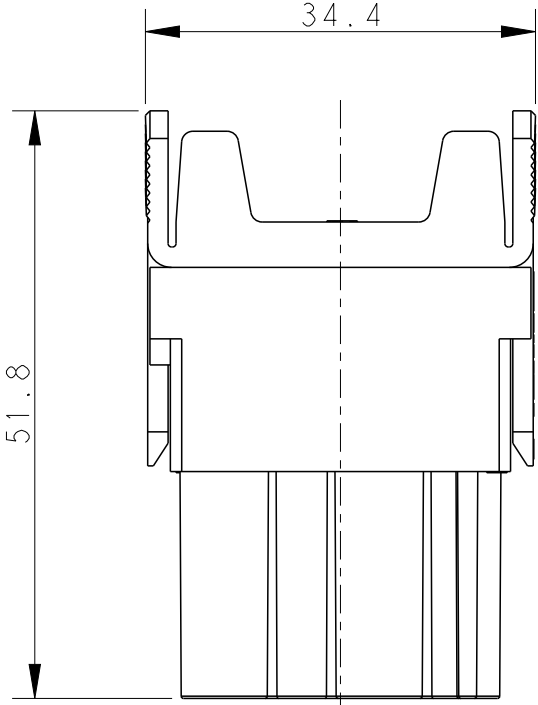
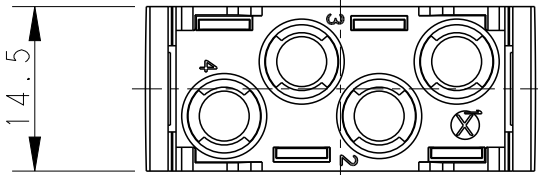


P	LTR	DESCRIPTION	DATE	DWN	APVD
	B1	ECR-17-003902	16APR2017	RL	CW
	C	ECR-21-111798	23SEP2021	WQR	CW
	C1	ECR-23-181096	18JUL2023	BS	CW
	D	ECR-25-237961	13JUN2025	ABS	RB


- NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 830V
RATED CURREN3T: 40A
INSULATION RESISTANCE: >=400MΩ
RATED IMPULSE VOLTAGE: 8KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
OPERATION TEMPERATURE: -40°C~+125°C
WIRE RANGE: 1.0~6.0mm² / 8AWG(10mm²)
CAUTION, INSULATOR OF 8AWG(10mm²) CABLE <= Ø6.1mm.
BREAK THE INSERT TO REMOVE 8AWG(10mm²) CONTACTS.
CONTACT TYPE: CRIMP CONTACT
2. CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING:T20400X20XX000)

- 注释:
1. 技术参数:
绝缘材料: PC
额定电压: 830V
额定电流: 40A
绝缘电阻: >=400MΩ
脉冲电压: 8KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
工作温度: -40°C~+125°C
接线范围: 1.0~6.0mm² / 8AWG(10mm²)
注意, 8AWG(10mm²) 线缆绝缘直径<= Ø6.1mm.
退出8AWG(10mm²) 针时需要破坏芯件.
接线类型: 冷压接
2. 端子需要单独订购.
(订货号参考图面: T20400X20XX000)

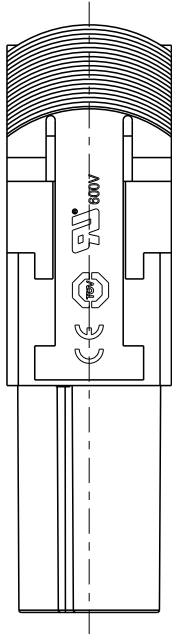

T2111042201-000	HMN-004-F	HMN-004 FEMALE MODULE INSERT HMN-004模块母插
-----------------	-----------	---

PART NUMBER 料 号	PART DESCRIPTION 描 述
--------------------	-------------------------

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 20MAR2015 David Wang	 TE Connectivity		
		CHK 20MAR2015 Chris.Wang			
		APVD 20MAR2015 Xiang Xu			
		PRODUCT SPEC 108-137060			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME HMN-004-F		
	0 PLC	±-	SIZE A3		
	1 PLC	±-			
	2 PLC	±-			
	3 PLC	±-			
		4 PLC	CAGE CODE 00779		
		ANGLES			
		±-	DRAWING NO T2111042201000		
		±-			
MATERIAL		FINISH	RESTRICTED TO -		
		-			
		-	SCALE 3:2		
		-			
CUSTOMER DRAWING			SHEET 1 OF 1		REV D