
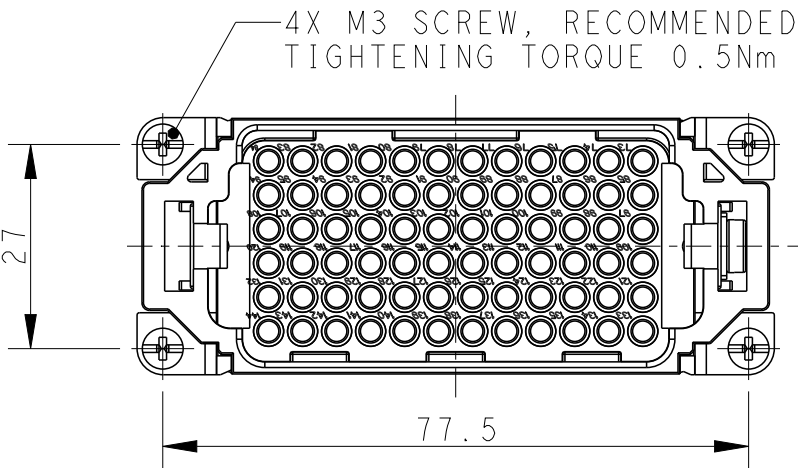

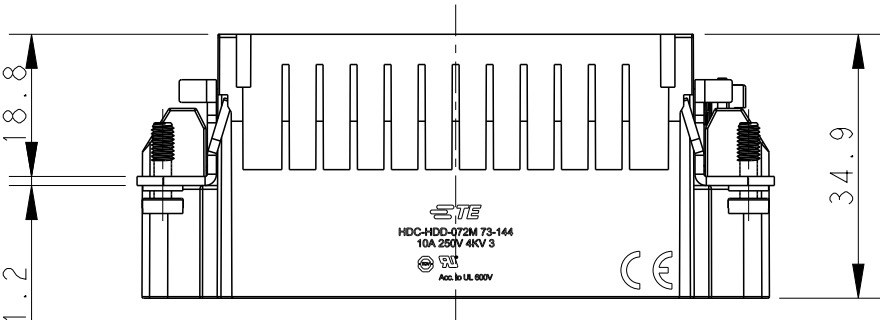



REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-15-013292	24SEP2015	DL	CW
	C	ECR-21-105887	26JUL2021	BS	CW
	D	ECR-22-150866	20SEP2022	DL	CW
	E	ECR-25-237606	29MAY2025	ABS	RB

- NOTES:
- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250 V
RATED CURRENT: 10 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 4 KV
POLLUTION DEGREE: 3
CONTACT RESISTANCE: $\leq 5 m\Omega$
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14-2.5 mm² (26-14 AWG)
CONTACT TYPE: CRIMP CONTACT
 - CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING:T20200X10XX000)


- 注释:
- 技术参数:
绝缘材料: PC
额定电压: 250V
额定电流: 10A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 4 KV
污染等级: 3
接触电阻: $\leq 5 m\Omega$
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.14-2.5 mm² (26-14 AWG)
接线类型: 冷压接
 - 端子需要单独订购.
(订货号参考图面: T20200X10XX000)

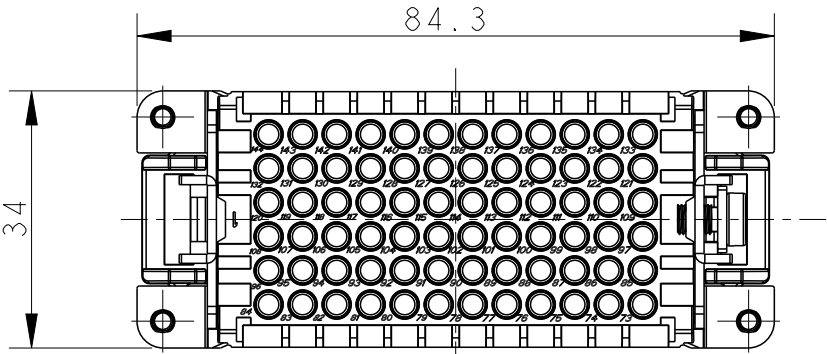

M4 SCREW
RECOMMENDED
TIGHTENING
TORQUE 1.2Nm

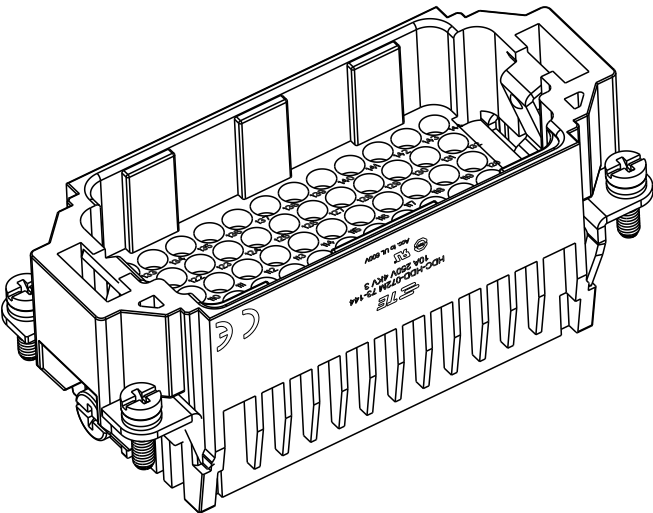

PANEL CUT FOR INSERTS FOR USE
WITHOUT HOODS/ HOUSINGS

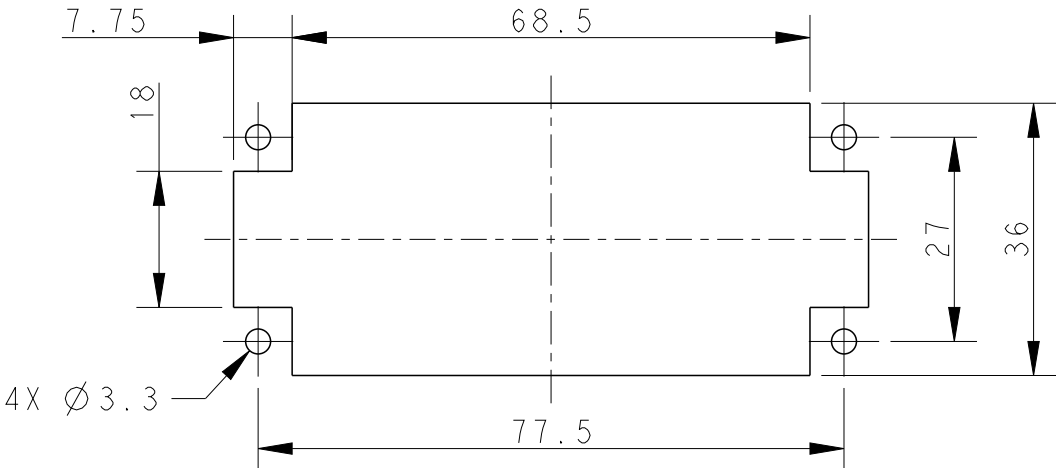

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 08MAY2015 David Wang	HDD-072-M 73-144			T2031442101-000	
		CHK 08MAY2015 Chris Wang	DESCRIPTION			PART NUMBER	
		APVD 08MAY2015 Xiang Xu	NAME			HDD-072-M 73-144	
DIMENSIONS: mm		PRODUCT SPEC 108-137043	TE Connectivity			RESTRICTED TO -	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC 114-137043					
MATERIAL		WEIGHT	SIZE	CAGE CODE	DRAWING NO	A300779	
		CUSTOMER DRAWING	SCALE 1:1			SHEET 1 OF 1	REV E