
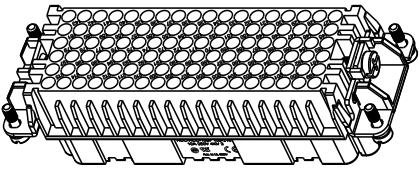


REVISIONS






P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-15-013292	24SEP2015	DL	CW
	C	ECR-21-105887	26JUL2021	BS	CW
	D	ECR-22-150866	27SEP2022	DL	CW
	E	ECR-25-237606	29MAY2025	ABS	RB

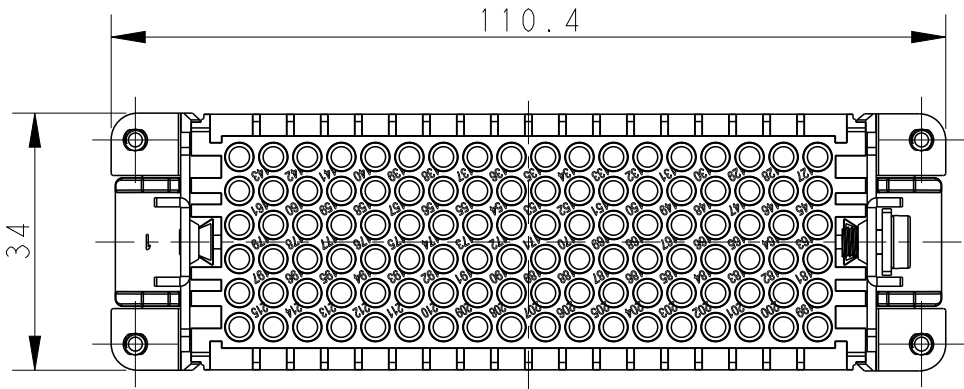

SCALE 1:2

M4 SCREW
RECOMMENDED TIGHTENING TORQUE 1.2Nm

4 X M3 SCREW
RECOMMENDED TIGHTENING TORQUE 0.5Nm

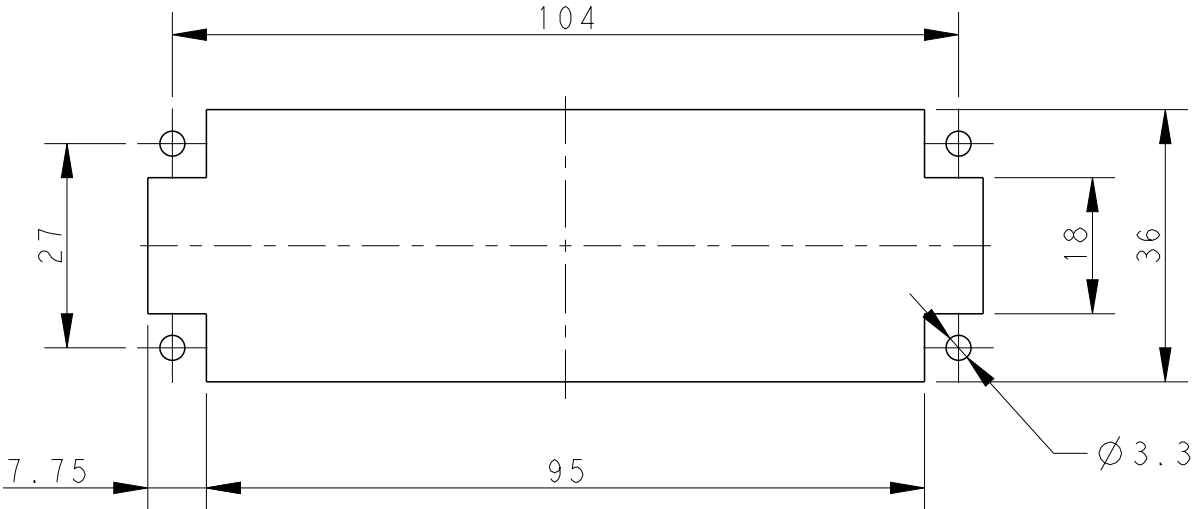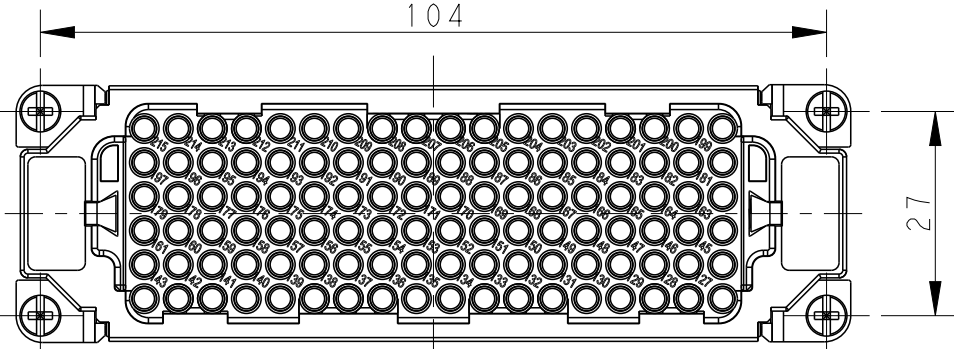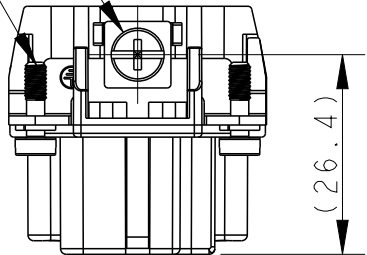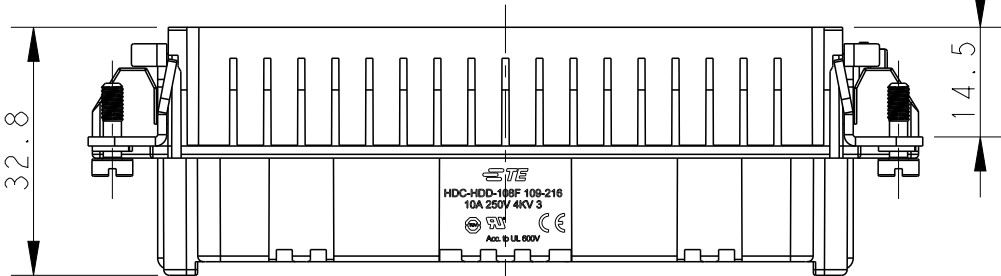


PANEL CUT OUT FOR INSERTS FOR USING
WITHOUT HOODS/HOUSINGS

- NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250 V
RATED CURRENT: 10 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 4 KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14-2.5 mm² (26-14 AWG)
CONTACT TYPE: CRIMP CONTACT
 2. CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING: T20200X20XX000)

- 注释:
1. 技术参数:
绝缘材料: PC
额定电压: 250V
额定电流: 10A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 4 KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.14-2.5 mm² (26-14 AWG)
接线类型: 冷压接
 2. 端子需要单独订购.
(订货号参考图面: T20200X20XX000)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm



MATERIAL

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±

FINISH

DWN 18MAR2015

DAVID LI

CHK 18MAR2015

CHRIS WANG

APVD 18MAR2015

XU XIANG

PRODUCT SPEC

108-137043

APPLICATION SPEC

114-137043

WEIGHT

-

CUSTOMER DRAWING

HDC-HDD-108F 109-216

T2032162201-000

DESCRIPTION

PART NUMBER



TE Connectivity

NAME
HDC-HDD-108F 109-216

SIZE

A3

CAGE CODE

-

DRAWING NO

©-T2032162201000

RESTRICTED TO

-

SCALE

1:1

SHEET

1 OF 1

REV

E