

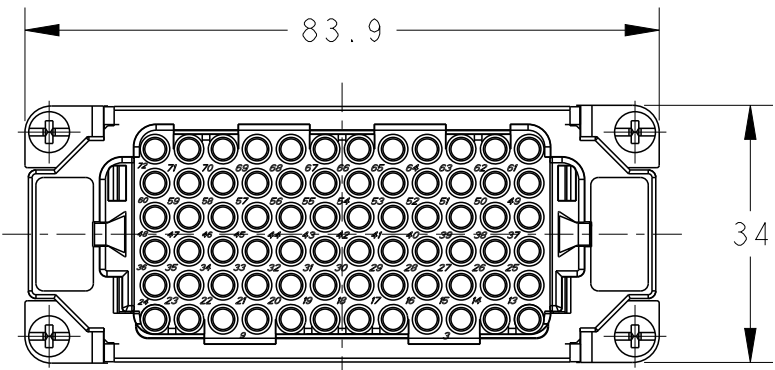
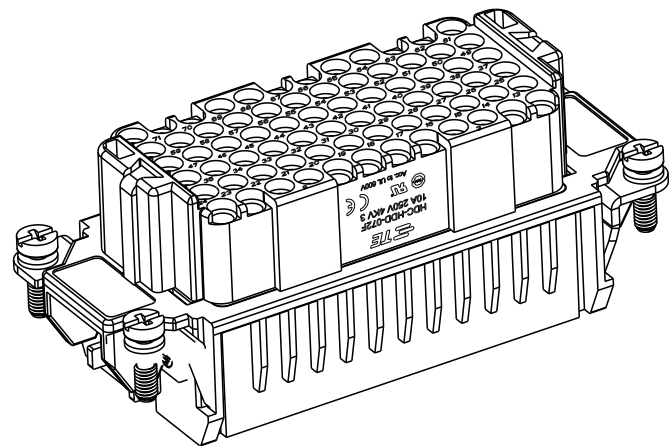



P	LTR	DESCRIPTION	DATE	DWN	APVD
	B1	ECR-16-015492	21NOV2016	QY	CW
	C	ECR-21-105887	26JUL2021	BS	CW
	D	ECR-22-150866	20SEP2022	DL	CW
	E	ECR-25-237606	29MAY2025	ABS	RB



4X M3 SCREW RECOMMENDED
TIGHTENING TORQUE 0.5Nm
4X M3螺丝, 推荐锁紧力矩0.5Nm

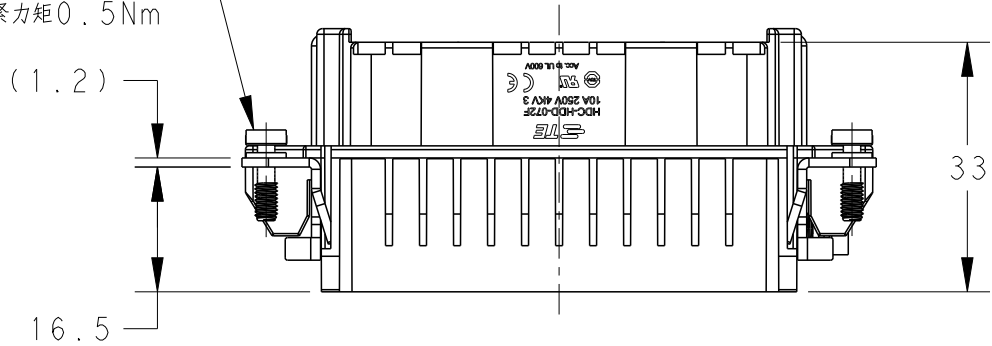


M4 SCREW
RECOMMENDED
TIGHTENING
TORQUE 1.2Nm
M4 螺丝, 推荐锁紧力矩1.2Nm

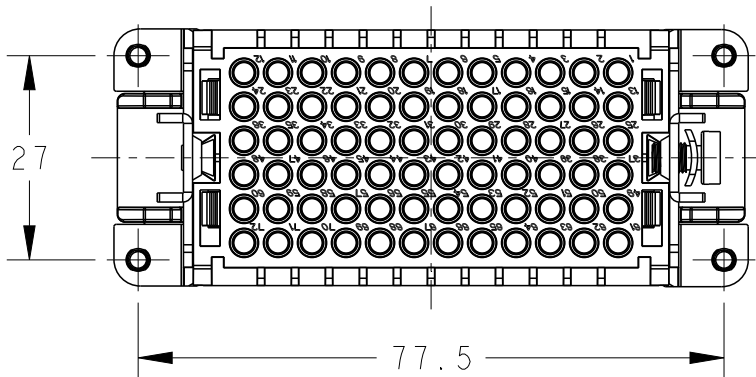


- NOTES:
- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250 V
RATED CURRENT: 10 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 4 KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14-2.5 mm² (26-14 AWG)
CONTACT TYPE: CRIMP CONTACT
 - CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING: T20200X20XX000)

- 注释:
- 技术参数:
绝缘材料: PC
额定电压: 250V
额定电流: 10A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 4 KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.14-2.5 mm² (26-14 AWG)
接线类型: 冷压接
 - 端子需要单独订购.
(订货号参考图面: T20200X20XX000)

TYPE-1, T2030722201-000, TE LOGO
类型-1, T2030722201-000, TE LOGO

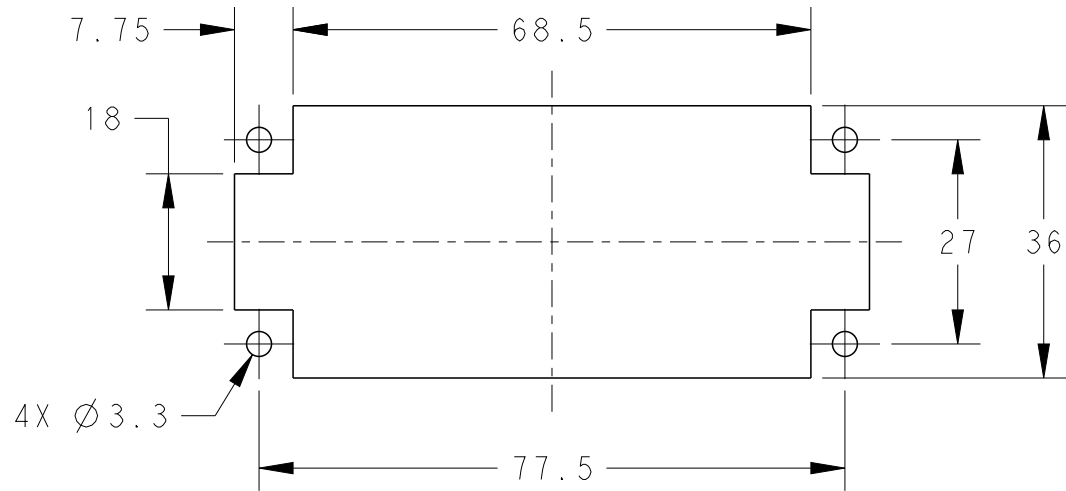

PANEL CUT OUT FOR INSERTS FOR USING
WITHOUT HODDS/HOUSINGS
不用防护外壳时芯件的安装开孔图

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN David Wang 29OCT2014	 TE Connectivity		
		CHK Chris Wang 29OCT2014			
		APVD Xiang Xu 29OCT2014			
		PRODUCT SPEC 108-137043			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME HDD-072-F		
		0 PLC ±	SIZE A300779		
		1 PLC ±			
		2 PLC ±	CAGE CODE T2030722201000		
		3 PLC ±			
MATERIAL		FINISH	DRAWING NO		
			RESTRICTED TO		
			SCALE 1:1		
			SHEET 1 OF 2		
			REV E		





REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-


NOTE :

SEE SHEET 1

注释 :
见页 1

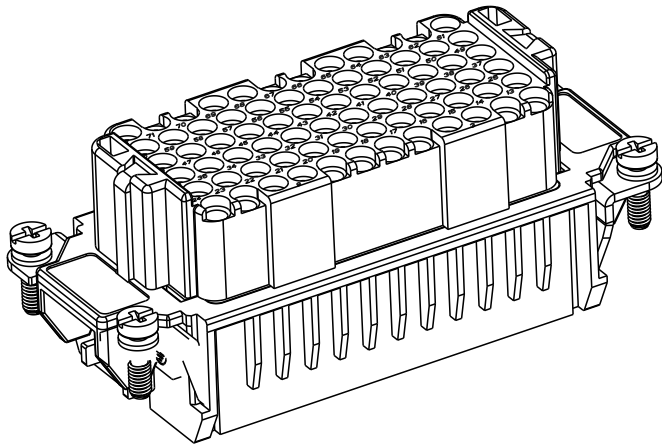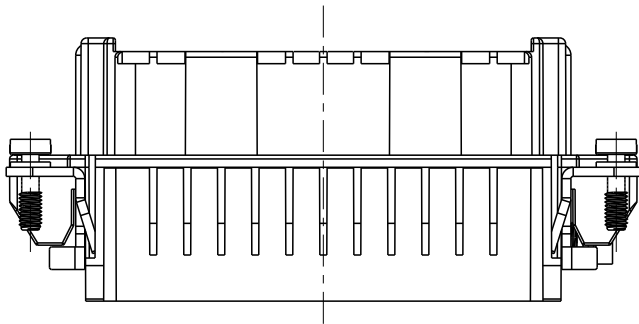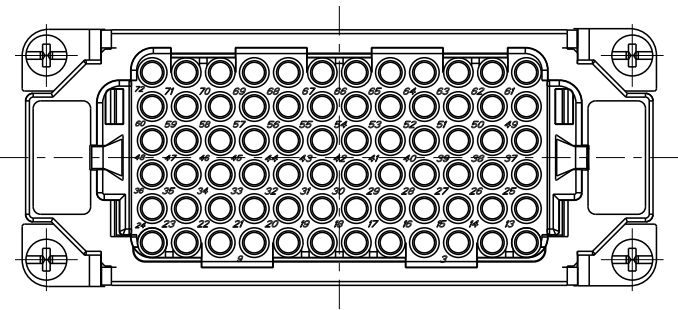


TYPE-2,T2030722201-001,STAINLESS STEEL SCREW,NO LOGO
类型-2,T2030722201-001,不锈钢螺丝,无LOGO

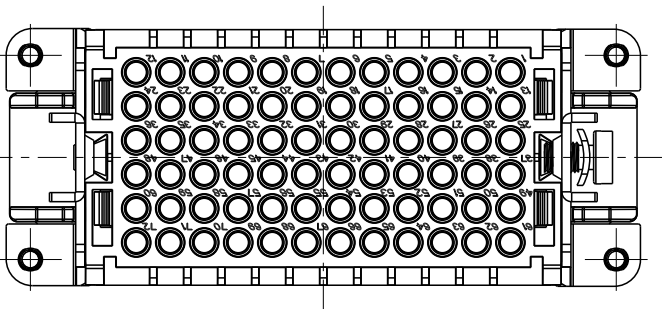

ALL DIMENSIONS ARE SAME AS TYPE 1,
EXCEPT THOSE DEFINED IN THIS TYPE.
除了在本类型中定义的尺寸外,其它尺寸同类型 1

T2030722201-001	HDD-072-F	HDD-072 FEMALE INSERT, CRIMPING SPLIT TYPE, STAINLESS STEEL SCREW,NO LOGO HDD-072 母插,冷压针分体式,不锈钢螺丝,无LOGO	TYPE-2 类 型-2
T2030722201-000	HDD-072-F	HDD-072 FEMALE INSERT, CRIMPING SPLIT TYPE HDD-072 母插,冷压针分体式	TYPE-1 类 型-1
PART NUMBER 料 号	PART DESCRIPTION 描 述		TYPE 类 型

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN David Wang 29OCT2014	 TE Connectivity		
		CHK Chris Wang 29OCT2014			
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD Xiang Xu 29OCT2014	NAME HDD-072-F		
	0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±- FINISH	PRODUCT SPEC 108-137043	SIZE A300779		
		APPLICATION SPEC 114-137043			
MATERIAL -	-	WEIGHT -	CAGE CODE T2030722201000		RESTRICTED TO -
-		CUSTOMER DRAWING	SCALE 1:1	SHEET 2 OF 2	REV E