
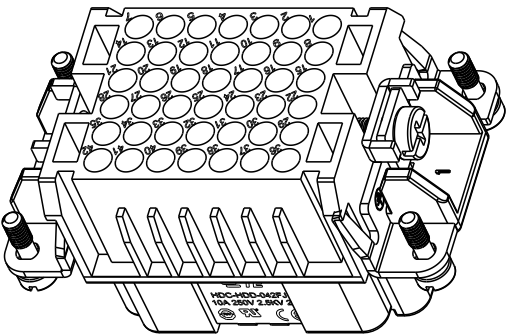


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	19MAR2015	DL	CW
	B	ECR-15-013292	24SEP2015	DL	CW
	C	ECR-21-105887	26JUL2021	BS	CW
	D	ECR-25-237606	30MAY2025	ABS	RB






- NOTES:
- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250 V
RATED CURRENT: 10 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 2.5 KV
POLLUTION DEGREE: 2
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
OPERATION TEMPERATURE: $-40-+125^{\circ}C$
WIRE RANGE: 0.14-2.5 mm² (26-14 AWG)
CONTACT TYPE: ROLLED CRIMP CONTACT
 - CONTACT NEED TO BE ORDERED SEPARATELY.

- 注释:
- 技术参数:
绝缘材料: PC
额定电压: 250V
额定电流: 10A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 2.5 KV
污染等级: 2
阻燃等级: UL94V-0
插拔次数: 500次
工作温度: $-40-+125^{\circ}C$
接线范围: 0.14-2.5 mm² (26-14 AWG)
接线类型: 卷皮式冷压接
 - 端子需要单独订购.

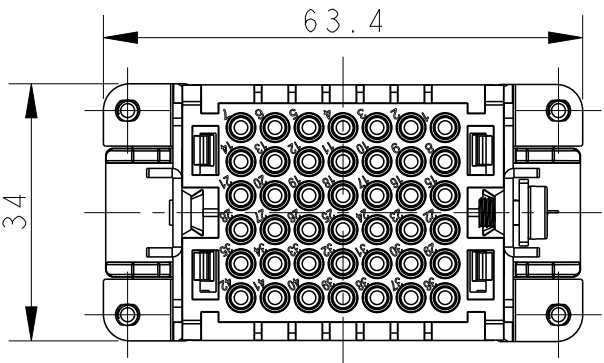

M4 SCREW
RECOMMENDED TIGHTENING TORQUE 1.2Nm

4 X M3 SCREW
RECOMMENDED TIGHTENING TORQUE 0.5Nm

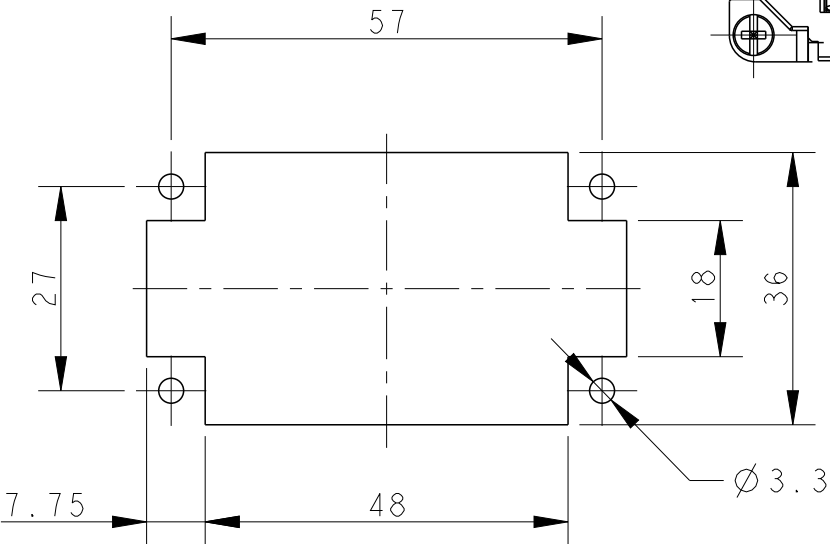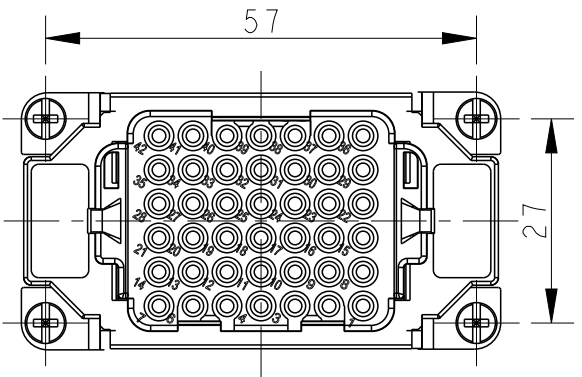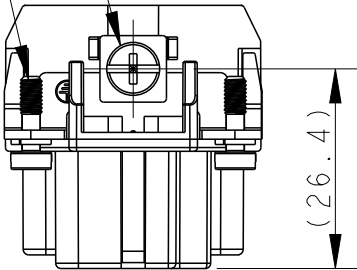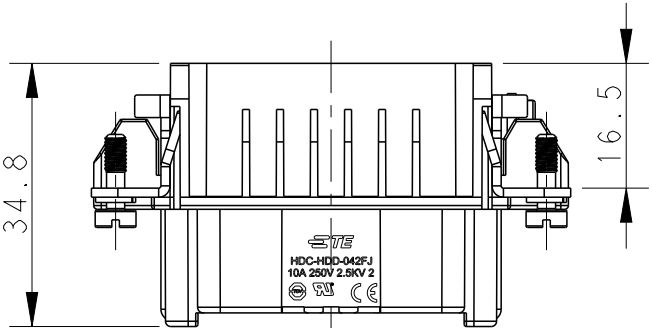

PANEL CUT OUT FOR INSERTS FOR USING
WITHOUT HOODS/HOUSINGS

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 18MAR2015	TE Connectivity HDD-042-FJ		
		CHK CHRIS WANG 18MAR2015			
		APVD XU XIANG 18MAR2015			
		PRODUCT SPEC 108-137043			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME HDD-042-FJ		
		0 PLC ±-	SIZE A3		
		1 PLC ±-	CAGE CODE -		
		2 PLC ±-	DRAWING NO T2030423201000		
		3 PLC ±-	RESTRICTED TO -		
		4 PLC ±-			
		ANGLES ±-			
MATERIAL -		FINISH -	WEIGHT -		
			CUSTOMER DRAWING		
			SCALE 1:1 SHEET 1 OF 1 REV D		