
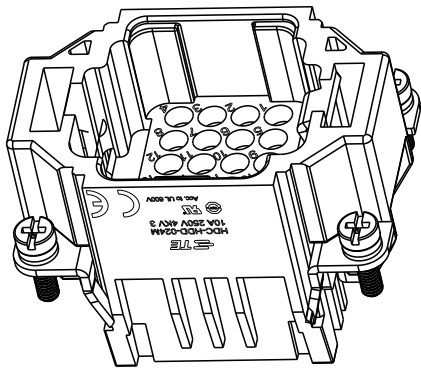


P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	ECR-21-105887	26 JUL 2021	BS	CW
	D	ECR-22-150866	23 SEP 2022	DL	CW
	D1	ECR-24-209682	27 MAY 2024	RW	CW
	E	ECR-25-237606	30 MAY 2025	ABS	RB




- NOTES:
- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250 V
RATED CURRENT: 10 A
INSULATION RESISTANCE: $\geq 400\text{M}\Omega$
RATED IMPULSE VOLTAGE: 4 KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14-2.5 mm² (26-14 AWG)
CONTACT TYPE: CRIMP CONTACT
 - CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING: T20200X10XX000)

- 注释:
- 技术参数:
绝缘材料: PC
额定电压: 250V
额定电流: 10A
绝缘电阻: $\geq 400\text{M}\Omega$
额定脉冲电压: 4 KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.14-2.5 mm² (26-14 AWG)
接线类型: 冷压接
 - 端子需要单独订购.
(订货号参考图面: T20200X10XX000)


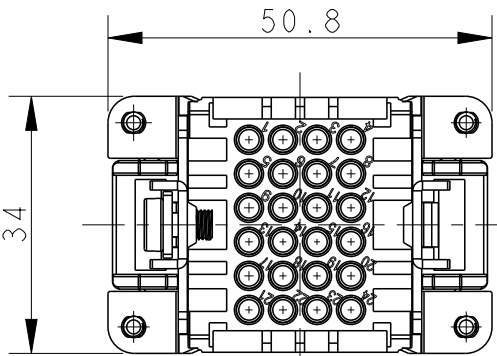


TYPE-1, T2030242101-000, TE LOGO
T2030242101-003, STAINLESS
STEEL SCREW, TE LOGO
类型-1, T2030242101-000, TE LOGO
T2030242101-003, 不锈钢螺丝, TE LOGO


M4 SCREW RECOMMENDED
TIGHTENING TORQUE 1.2Nm
M4 螺丝, 推荐锁紧力矩 1.2Nm

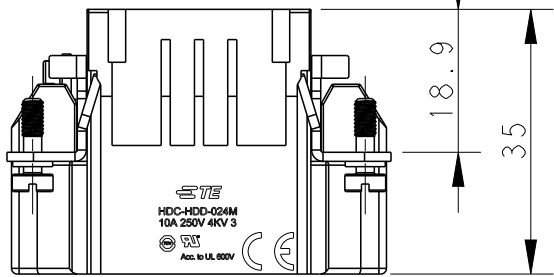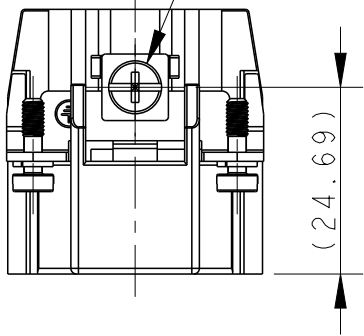

4X M3 SCREW RECOMMENDED
TIGHTENING TORQUE 0.5Nm
4X M3螺丝, 推荐锁紧力矩 0.5Nm

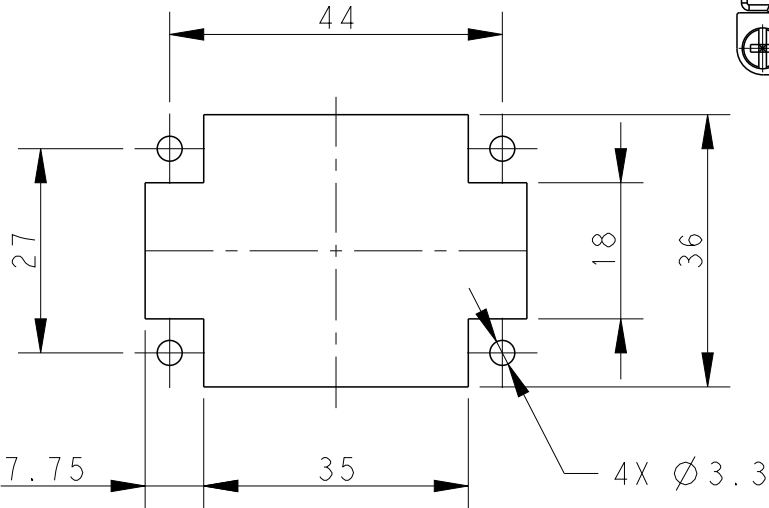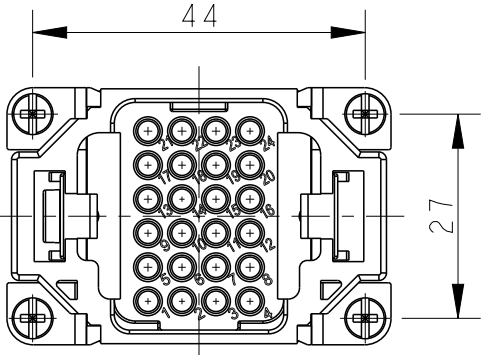

PANEL CUT OUT FOR INSERTS FOR USING
WITHOUT HODDS/HOUSINGS
不用防护外壳时芯件的安装开孔图






THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVIE LI 16MAR2015		TE Connectivity			
		CHK CHRIS WANG 16MAR2015					
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD XU XIANG 16MAR2015		NAME HDD-024-M	
		0 PLC ±-		PRODUCT SPEC		SIZE A3	
		1 PLC ±-		108-137043			
		2 PLC ±-		APPLICATION SPEC		CAGE CODE -	
		3 PLC ±-		114-137043		DRAWING NO C-T2030242101000	
		4 PLC ±-		WEIGHT -		RESTRICTED TO -	
		ANGLES ±-					
MATERIAL - -		FINISH - -		CUSTOMER DRAWING			
				SCALE 1:1		SHEET 1 OF 2	
						REV E	

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1	-	-	-

NOTE :
SEE SHEET 1


注释 :
见页 1

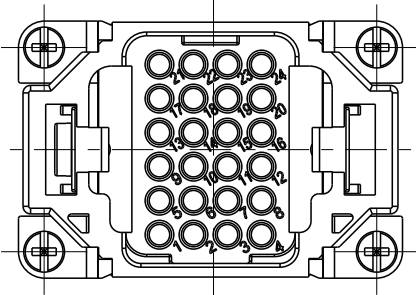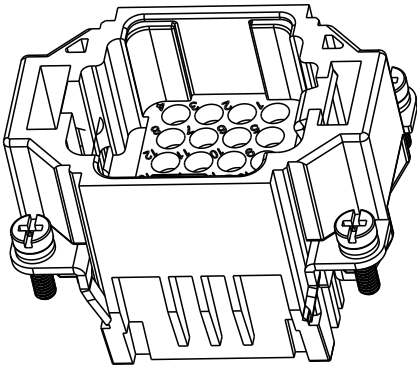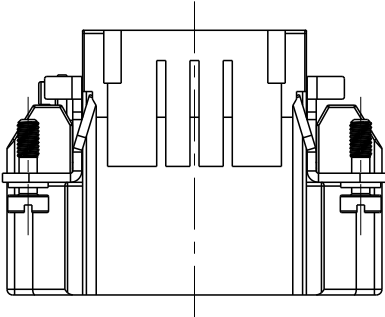

TYPE-2,T2030242101-002,STAINLESS STEEL SCREW,NO LOGO
类型-2,T2030242101-002,不锈钢螺丝,无LOGO

T2030242101-002	HDD-024-M	HDD-024 MALE INSERT, STAINLESS STEEL SCREW,NO LOGO HDD-024 公插,不锈钢螺丝,无LOGO	TYPE-2 类 型-2
T2030242101-003	HDD-024-M	HDD-024 MALE INSERT, STAINLESS STEEL SCREW,TE LOGO HDD-024 公插,不锈钢螺丝,TE LOGO	TYPE-1 类 型-1
T2030242101-000	HDD-024-M	HDD-024 MALE INSERT HDD-024 公插	
PART NUMBER 料 号		PART DESCRIPTION 描 述	TYPE 类 型

ALL DIMENSIONS ARE SAME AS TYPE 1,
EXCEPT THOSE DEFINED IN THIS TYPE.
除了在本类型中定义的尺寸外,其它尺寸同类型1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 16MAR2015 DAVIE LI	 TE Connectivity		
		CHK 16MAR2015 CHRIS WANG			
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD 16MAR2015 XU XIANG	NAME HDD-024-M		
	0 PLC ±-	PRODUCT SPEC 108-137043	SIZE A3		
	1 PLC ±-	APPLICATION SPEC 114-137043			
MATERIAL -	FINISH -	WEIGHT -	CAGE CODE -	DRAWING NO ©-T2030242101000	RESTRICTED TO -
		CUSTOMER DRAWING		SCALE 1:1	SHEET 2 OF 2
				REV E	