
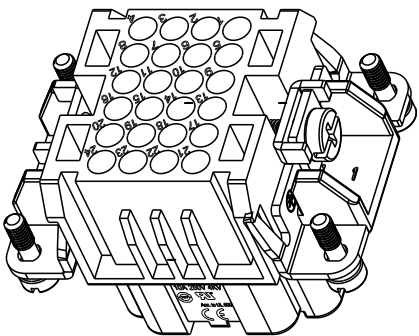





P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	ECR-21-105887	26 JUL 2021	BS	CW
	D	ECR-22-150866	23 SEP 2022	DL	CW
	D1	ECR-24-209682	23 MAY 2024	RW	CW
	E	ECR-25-237606	30 MAY 2025	ABS	RB

- NOTES:
- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250 V
RATED CURRENT: 10 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 4 kV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14-2.5 mm² (26-14 AWG)
CONTACT TYPE: CRIMP CONTACT
 - CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING: T20200X20XX000)



- 注释:
- 技术参数:
绝缘材料: PC
额定电压: 250V
额定电流: 10A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 4 kV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.14-2.5 mm² (26-14 AWG)
接线类型: 冷压接
 - 端子需要单独订购.
(订货号参考图面: T20200X20XX000)

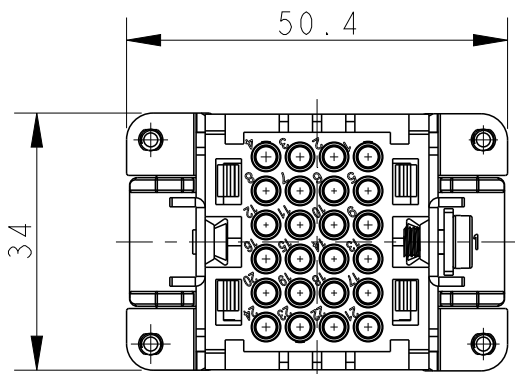

M4 SCREW RECOMMENDED
TIGHTENING TORQUE 1.2Nm
M4 螺丝, 推荐锁紧力矩 1.2Nm

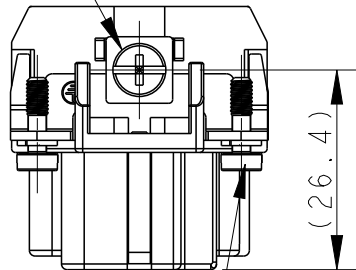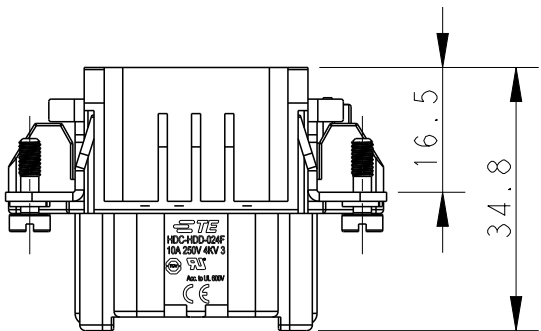


4X M3 SCREW RECOMMENDED
TIGHTENING TORQUE 0.5Nm
4X M3螺丝, 推荐锁紧力矩 0.5Nm

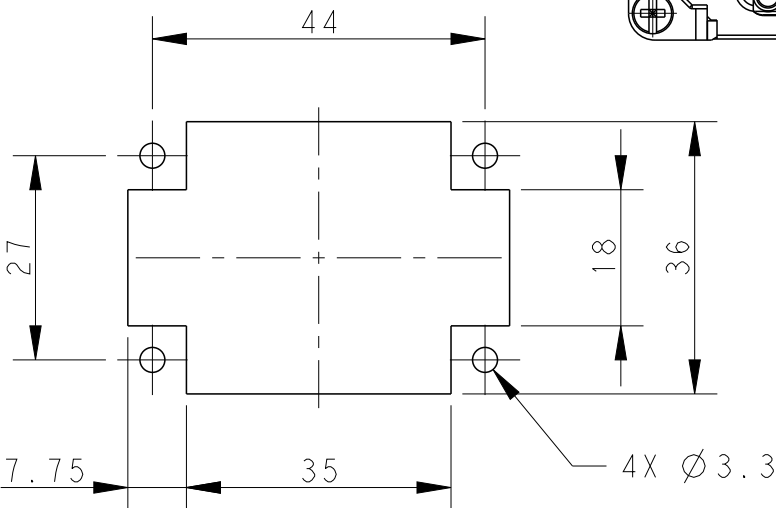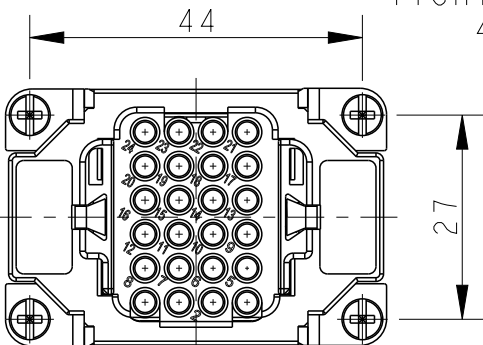

TYPE-1, T2030242201-000, TE LOGO
T2030242201-003, STAINLESS STEEL SCREW, TE LOGO
类型-1, T2030242201-000, TE LOGO
T2030242201-003, 不锈钢螺丝, TE LOGO

PANEL CUT OUT FOR INSERTS FOR USING
WITHOUT HOODS/HOUSINGS
不用防护外壳时芯件的安装开孔图

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 16MAR2015		 TE Connectivity															
		CHK CHRIS WANG 16MAR2015																	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-		APVD XU XIANG 16MAR2015				NAME HDD-024-F											
				PRODUCT SPEC 108-137043		SIZE A3				CAGE CODE -		DRAWING NO G-T2030242201000		RESTRICTED TO -					
				APPLICATION SPEC 114-137043															
				WEIGHT -															
MATERIAL - -		FINISH - -		CUSTOMER DRAWING										SCALE 1:1		SHEET 1 OF 2		REV E	







REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

NOTE:

SEE SHEET 1


注释:
见页 1

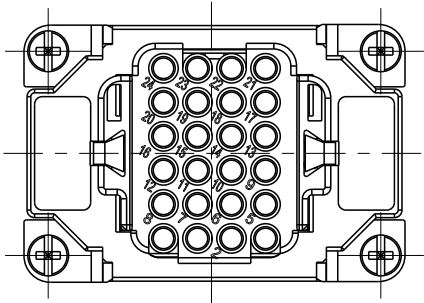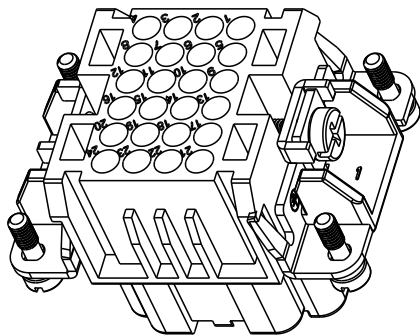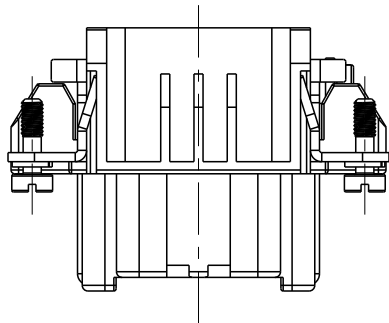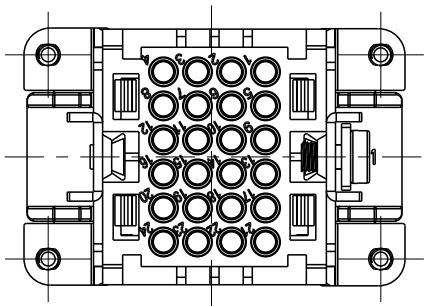

TYPE-2, T2030242201-002, STAINLESS STEEL SCREW, NO LOGO
类型-2, T2030242201-002, 不锈钢螺丝, 无LOGO

T2030242201-002	HDD-024-F	HDD-024 FEMALE INSERT, CRIMPING SPLIT TYPE, STAINLESS STEEL SCREW, NO LOGO HDD-024 母插, 冷压针分体式, 不锈钢螺丝, 无LOGO	TYPE-2 类型-2
T2030242201-003	HDD-024-F	HDD-024 FEMALE INSERT, CRIMPING SPLIT TYPE STAINLESS STEEL SCREW, TE LOGO HDD-024 母插, 冷压针分体式, 不锈钢螺丝, TE LOGO	TYPE-1 类型-1
T2030242201-000	HDD-024-F	HDD-024 FEMALE INSERT, CRIMPING SPLIT TYPE HDD-024 母插, 冷压针分体式	
PART NUMBER 料号	PART DESCRIPTION 描述		TYPE 类型

ALL DIMENSIONS ARE SAME AS TYPE 1,
EXCEPT THOSE DEFINED IN THIS TYPE.
除了在本类型中定义的尺寸外, 其它尺寸同类型1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 16MAR2015	 TE Connectivity		
		CHK CHRIS WANG 16MAR2015			
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD XU XIANG 16MAR2015	NAME HDD-024-F		
	0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±	PRODUCT SPEC 108-137043			
MATERIAL -	FINISH -	APPLICATION SPEC 114-137043	SIZE A3	CAGE CODE -	DRAWING NO T2030242201000
		WEIGHT -	RESTRICTED TO -		
		CUSTOMER DRAWING	SCALE 1:1	SHEET 2 OF 2	REV E