
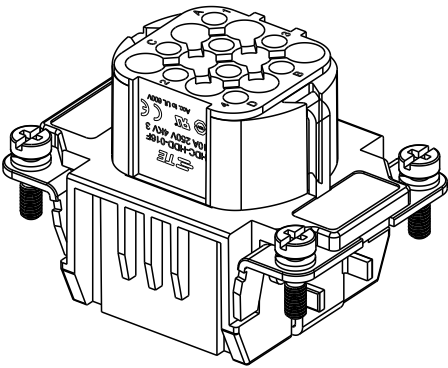




P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	04JAN2016	RL	CW
	B	ECR-21-105887	26JUL2021	BS	CW
	C	ECR-22-150866	21SEP2022	DL	CW
	D	ECR-25-237606	30MAY2025	ABS	RB

- NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250 V
RATED CURRENT: 10 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 4 KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
OPERATION TEMPERATURE: $-40-+125^{\circ}C$
WIRE RANGE: 0.14-2.5 mm² (26-14 AWG)
CONTACT TYPE: CRIMP CONTACT
 2. CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING: T20200X20XX000)



- 注释:
1. 技术参数:
绝缘材料: PC
额定电压: 250V
额定电流: 10A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 4 KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
工作温度: $-40-+125^{\circ}C$
接线范围: 0.14-2.5 mm² (26-14 AWG)
接线类型: 冷压接
 2. 端子需要单独订购.
(订货号参考图面: T20200X20XX000)

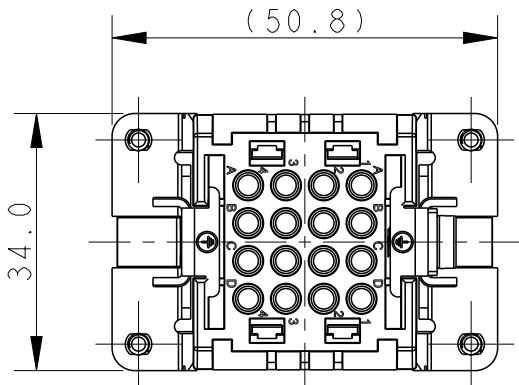


GROUND CONTACT SCREW:
M4 SCREW RECOMMENDED
TIGHTENING TORQUE 1.2Nm
接地压线螺丝: M4螺丝推荐拧紧力矩1.2Nm

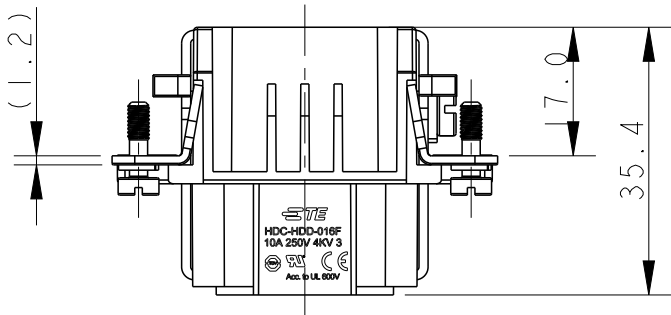

FIXING SCREW: 4xM3
RECOMMENDED TIGHTENING
TORQUE 0.5Nm
固定螺丝: 4xM3螺丝推荐拧紧力矩0.5Nm

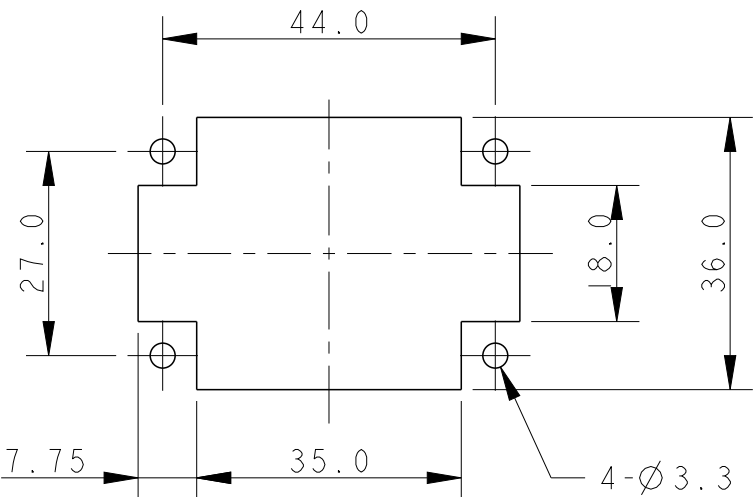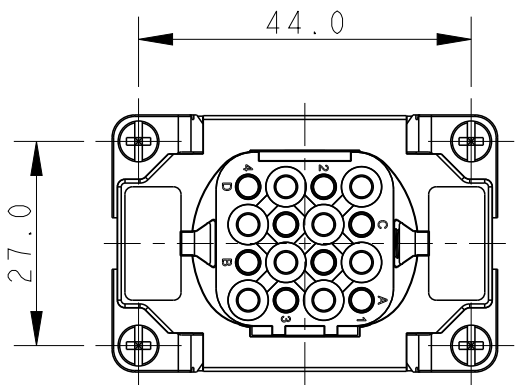

PANEL CUT OUT FOR INSERTS FOR USING
WITHOUT HOODS/HOUSINGS
不带壳体时面板开孔尺寸

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN ROY LIU 04JAN2016	TE Connectivity			
		CHK KYLE ZENG 04JAN2016				
		APVD CHRIS WANG 04JAN2016				
		PRODUCT SPEC 108-137043				
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME HDD-016-F		RESTRICTED TO -	
		0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-	APPLICATION SPEC 114-137043			
MATERIAL - -		FINISH - -	WEIGHT -			
		CUSTOMER DRAWING				
			SIZE A3	CAGE CODE -	DRAWING NO C-T2030162201000	
			SCALE 1:1		SHEET 1	OF 1
					REV D	