


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	25AUG2018	BS	CW
	B	ECR-21-105750	01JUL2021	BS	CW
	C	ECR-25-246911	25JUN2025	ABS	RB





- NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250 V
RATED CURRENT: 10 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 4 KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14-2.5 mm² (26-14 AWG)
CONTACT TYPE: CRIMP CONTACT
 2. CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING:T20200X10XX000)

- 注释:
1. 技术参数:
绝缘材料: PC
额定电压: 250V
额定电流: 10A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 4 KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.14-2.5 mm² (26-14 AWG)
接线类型: 冷压接
 2. 端子需要单独订购.
(订货号参考图面: T20200X10XX000)

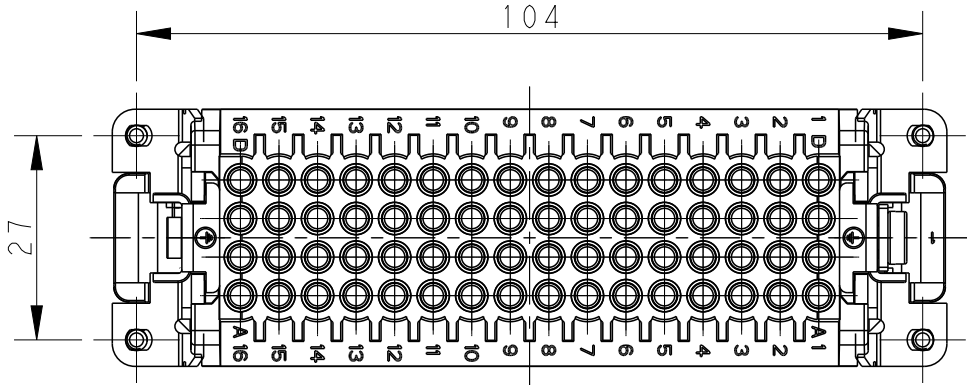


4X M3 SCREW RECOMMENDED
TIGHTENING TORQUE 0.5Nm
4X M3螺丝, 推荐锁紧力矩0.5Nm

M4 SCREW RECOMMENDED
TIGHTENING TORQUE 1.2Nm
M4 螺丝, 推荐锁紧力矩1.2Nm

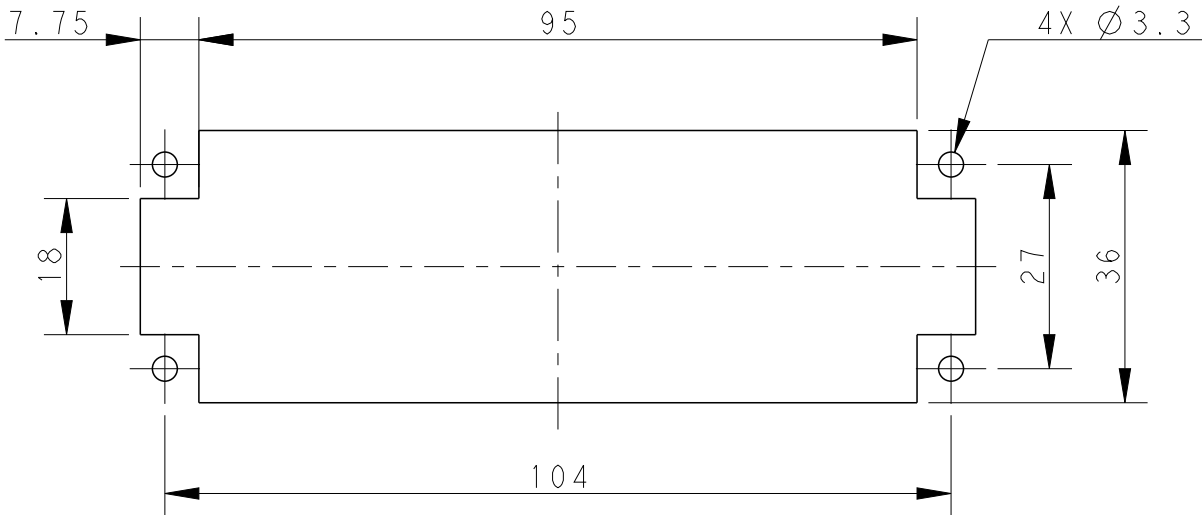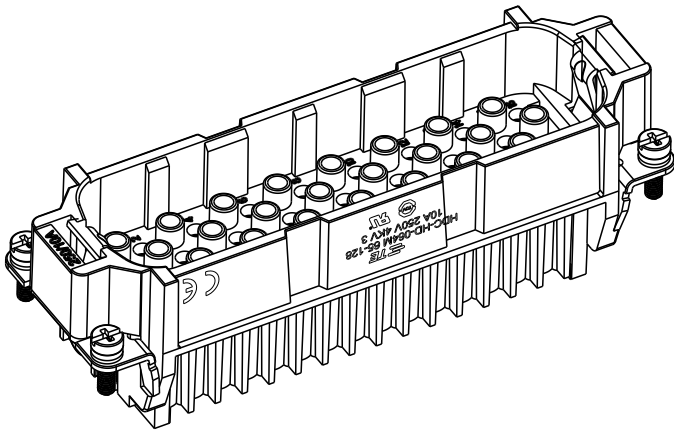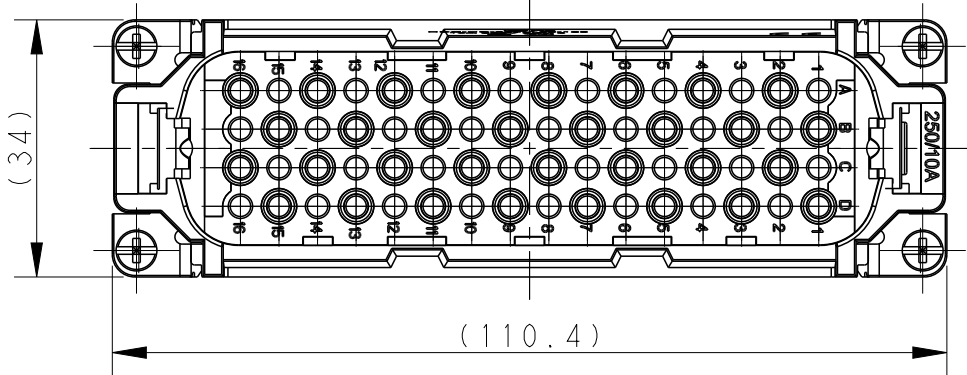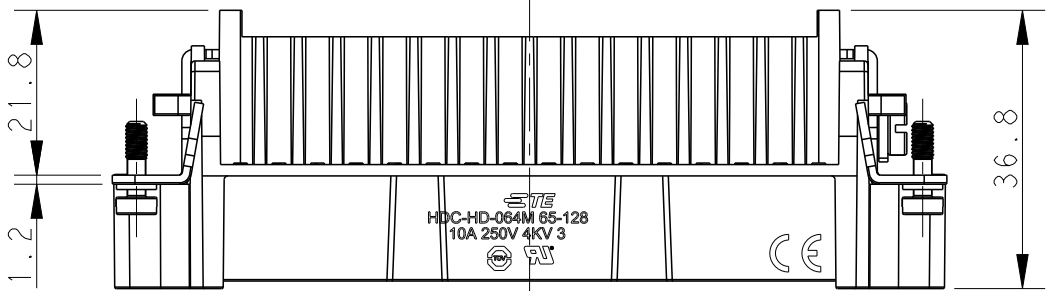

PANEL CUT FOR INSERTS FOR USE
WITHOUT HOODS/ HOUSINGS
不用防护外壳时芯件的安装开孔图

T2021282101-000	HD-064-M 65-128	HD-064 MALE INSERT 65-128 HD-064公插 65-128
PART NUMBER 零件料号	PART DESCRIPTION 零件描述	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN BELL SU 24AUG2018	 TE Connectivity						
		CHK GINO YAO 25AUG2018							
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD CHRIS WANG 25AUG2018	NAME HD-064-M 65-128						
	0 PLC ±-	PRODUCT SPEC	SIZE A3				CAGE CODE 00779	DRAWING NO C-T2021282101000	RESTRICTED TO -
	1 PLC ±-	108-137042							
	2 PLC ±-	APPLICATION SPEC							
	3 PLC ±-	114-137042							
	4 PLC ±-								
	ANGLES ±-								
MATERIAL -	FINISH -	WEIGHT -							
CUSTOMER DRAWING			SCALE 1:1		SHEET 1 OF 1		REV C		