


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	24AUG2018	BS	CW
	B	ECR-21-105750	01JUL2021	BS	CW
	C	ECR-25-246911	25JUN2025	ABS	RB






- NOTES:
- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250 V
RATED CURRENT: 10 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 4 KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14-2.5 mm² (26-14 AWG)
CONTACT TYPE: CRIMP CONTACT
 - CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING:T20200X20XX000)

- 注释:
- 技术参数:
绝缘材料: PC
额定电压: 250V
额定电流: 10A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 4 KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.14-2.5 mm² (26-14 AWG)
接线类型: 冷压接
 - 端子需要单独订购.
(订货号参考图面: T20200X20XX000)

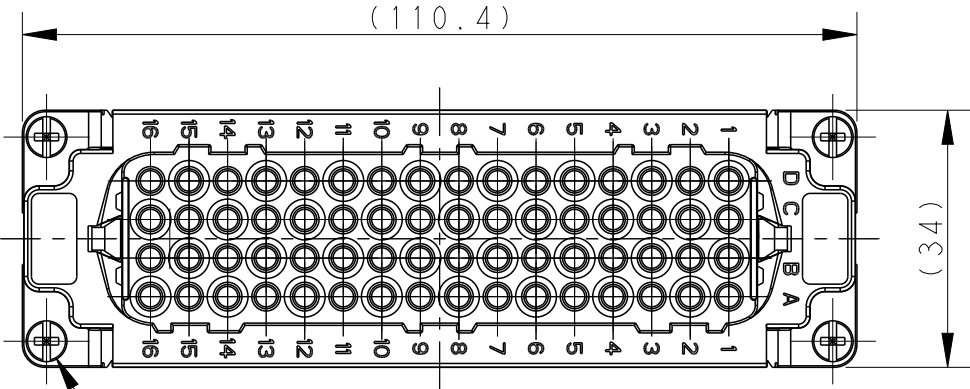


4X M3 SCREW RECOMMENDED
TIGHTENING TORQUE 0.5Nm
4X M3螺丝, 推荐锁紧力矩0.5Nm

M4 SCREW RECOMMENDED
TIGHTENING TORQUE 1.2Nm
M4 螺丝, 推荐锁紧力矩1.2Nm

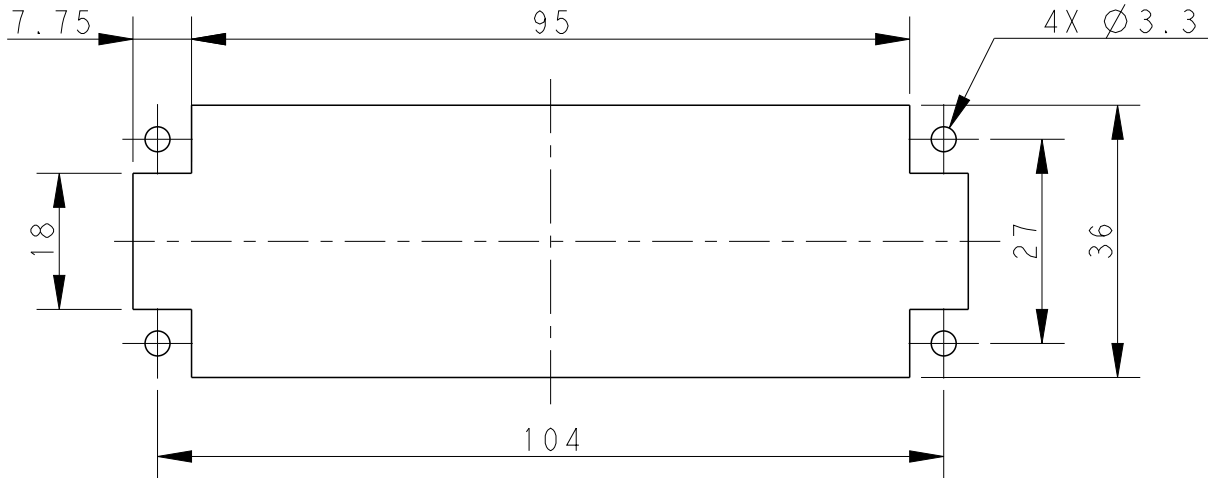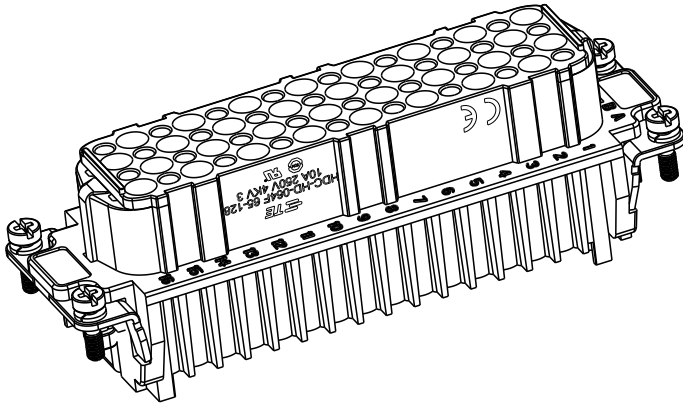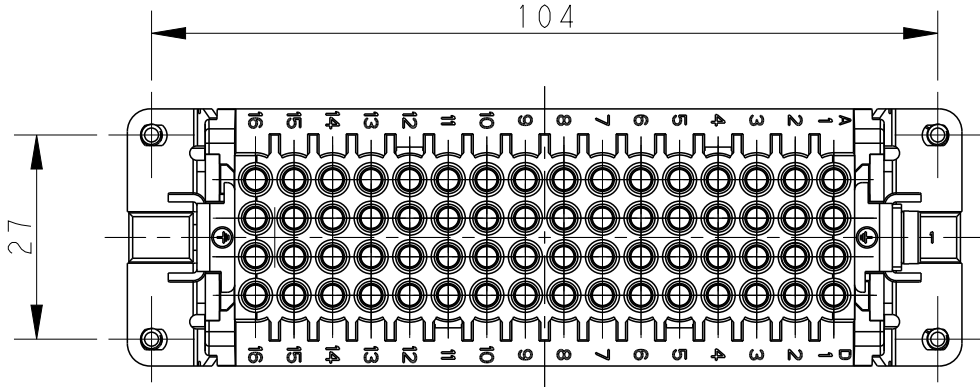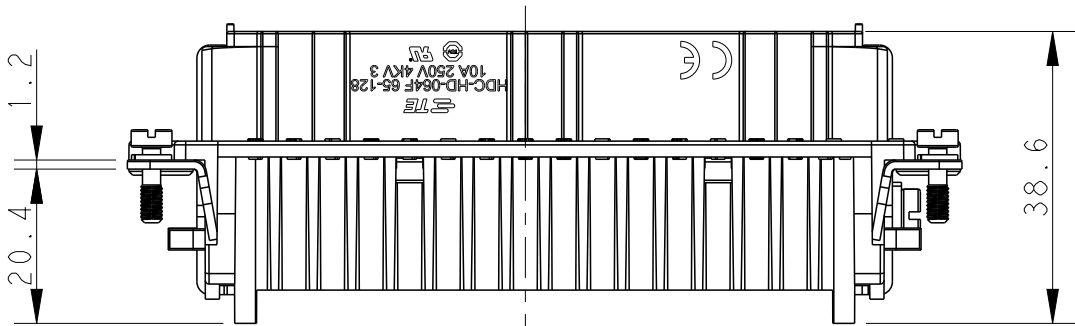

PANEL CUT FOR INSERTS FOR USE
WITHOUT HOODS/ HOUSINGS
不用防护外壳时芯件的安装开孔图

T2021282201-000	HD-064-F 65-128	HD-064 FEMALE INSERT 65-128 HD-064母插 65-128
PART NUMBER 零件料号	PART DESCRIPTION 零件描述	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN BELL SU 24AUG2018	 TE Connectivity			
		CHK GINO YAO 24AUG2018				
DIMENSIONS: mm		APVD CHRIS WANG 24AUG2018	NAME HD-064-F 65-128			
		PRODUCT SPEC 108-137042	RESTRICTED TO			
		APPLICATION SPEC 114-137042				
		WEIGHT -				
		CUSTOMER DRAWING				
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-		SIZE A3				
MATERIAL - - -		FINISH - - -		CAGE CODE 00779		
				DRAWING NO C-T2021282201000		
				SCALE 1:1		
				SHEET 1 OF 1		
				REV C		