


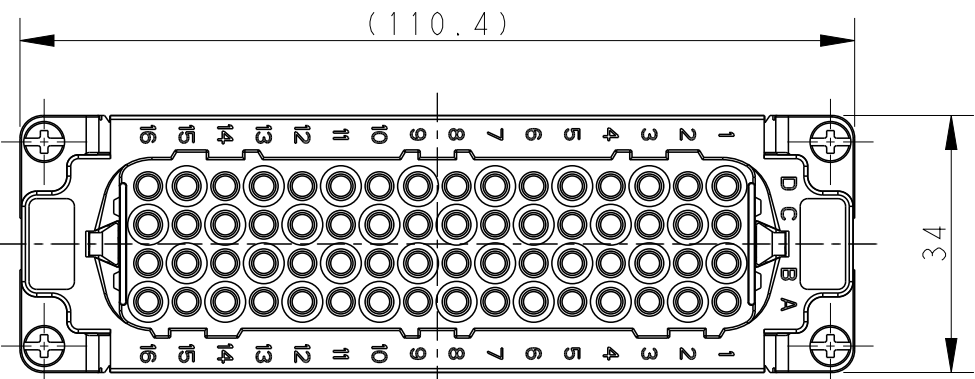



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	14DEC2016	DW	CW
	B	ECR-21-105750	01JUL2021	BS	CW
	D	ECR-25-246911	26JUN2025	ABS	RB

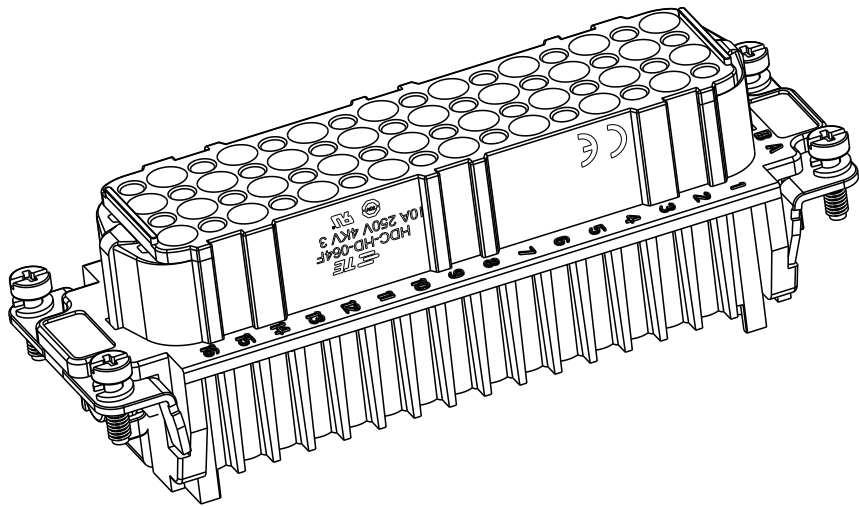



M4 SCREW RECOMMENDED
TIGHTENING TORQUE 1.2Nm
M4 螺丝, 推荐锁紧力矩 1.2Nm

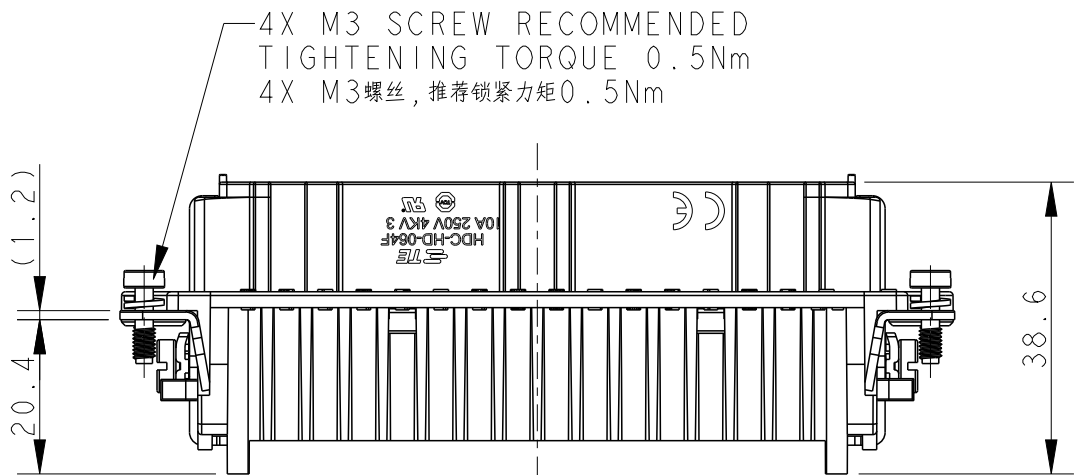

4X M3 SCREW RECOMMENDED
TIGHTENING TORQUE 0.5Nm
4X M3螺丝, 推荐锁紧力矩 0.5Nm



M4 SCREW RECOMMENDED
TIGHTENING TORQUE 1.2Nm
M4 螺丝, 推荐锁紧力矩 1.2Nm

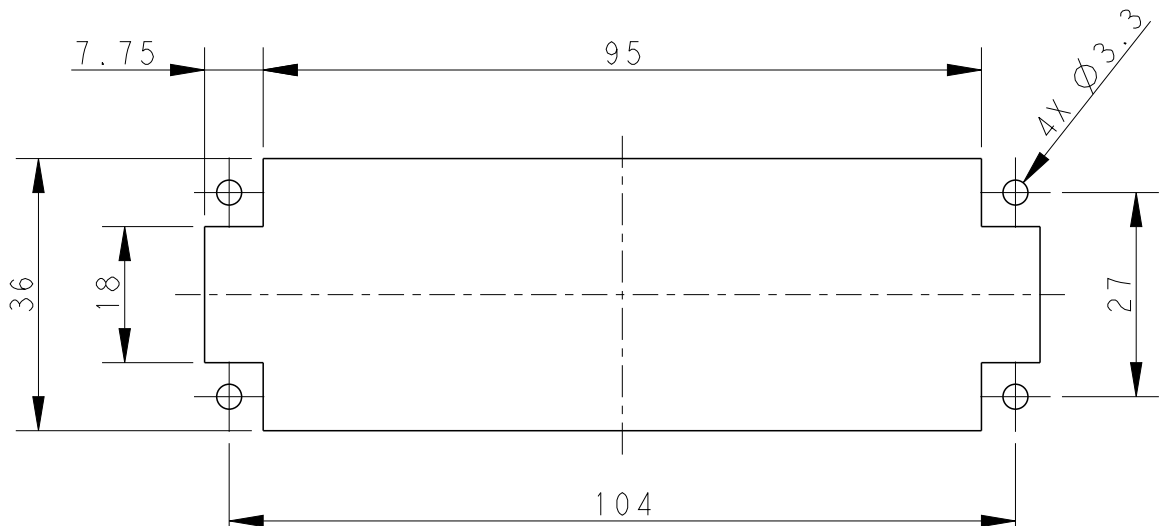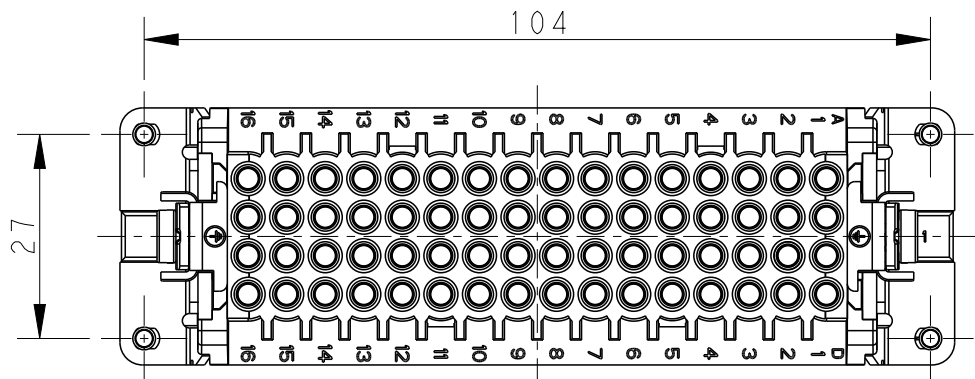

PANEL CUT OUT DIMENSION FOR INSERT
WITHOUT HOODS/HOUSING, ONLY FOR REFERENCE
不使用防护外壳时芯件的开孔安装尺寸, 仅供参考

- NOTES:
- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250 V
RATED CURRENT: 10 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 4 KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14-2.5 mm² (26-14 AWG)
CONTACT TYPE: CRIMP CONTACT
 - CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING: T20200X20XX000)

- 注释:
- 技术参数:
绝缘材料: PC
额定电压: 250V
额定电流: 10A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 4 KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.14-2.5 mm² (26-14 AWG)
接线类型: 冷压接
 - 端子需要单独订购.
(订货号参考图面: T20200X20XX000)

T2020642201-003		HD-064-F		HD-064 FEMALE INSERT, 2X M4 SCREW HD-064 母插, 2X M4 螺丝						
PART NUMBER			PART DESCRIPTION							
料 号			描 述							
CONTROLLED DOCUMENT.			DWN 14DEC2016 DAVID WANG		 TE Connectivity					
			CHK 14DEC2016 CHRIS WANG							
TOLERANCES UNLESS OTHERWISE SPECIFIED:			APVD 14DEC2016 XIANG XU		NAME HD-064-F					
± ± ± ± ±			PRODUCT SPEC 108-137042		SIZE A2					
±			APPLICATION SPEC 114-137042							
			WEIGHT -		CAGE CODE 00779		DRAWING NO C-T2020642201003	RESTRICTED TO		
			CUSTOMER DRAWING					SCALE 1:1	SHEET 1 OF 1	REV D