

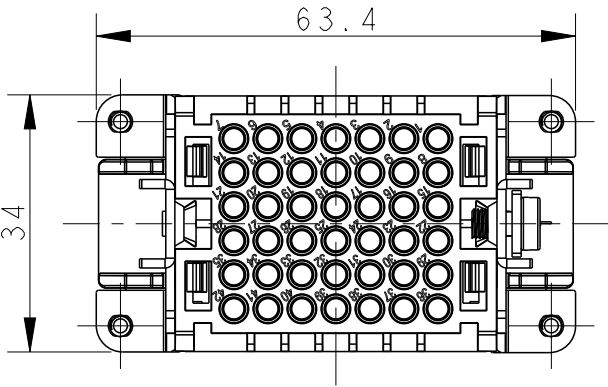
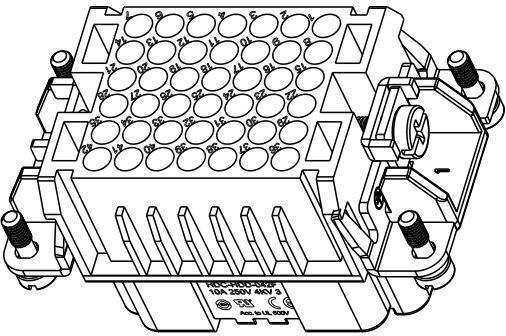
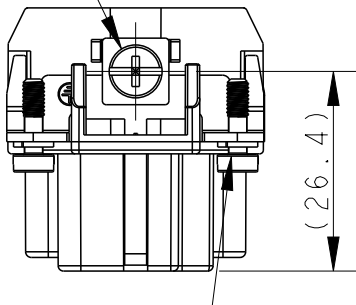


P	LTR	DESCRIPTION	DATE	DWN	APVD
	B2	ECR-19-012652	21SEP2019	BS	CW
	C	ECR-21-105887	26JUL2021	BS	CW
	D	ECR-22-150866	13SEP2022	DL	CW
	E	ECR-25-237606	30MAY2025	ABS	RB


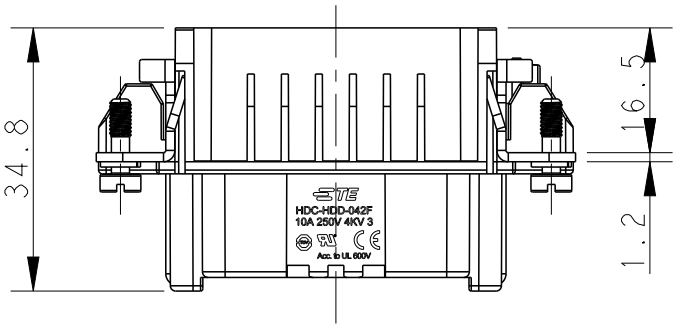


TYPE-1:T2030422201-000 TE LOGO
类 型-1:T2030422201-000 TE LOGO

M4 SCREW RECOMMENDED
TIGHTENING TORQUE 1.2Nm
M4螺丝, 推荐锁紧力矩1.2Nm




4 X M3 SCREW RECOMMENDED
TIGHTENING TORQUE 0.5Nm
4X M3螺丝, 推荐锁紧力矩0.5Nm

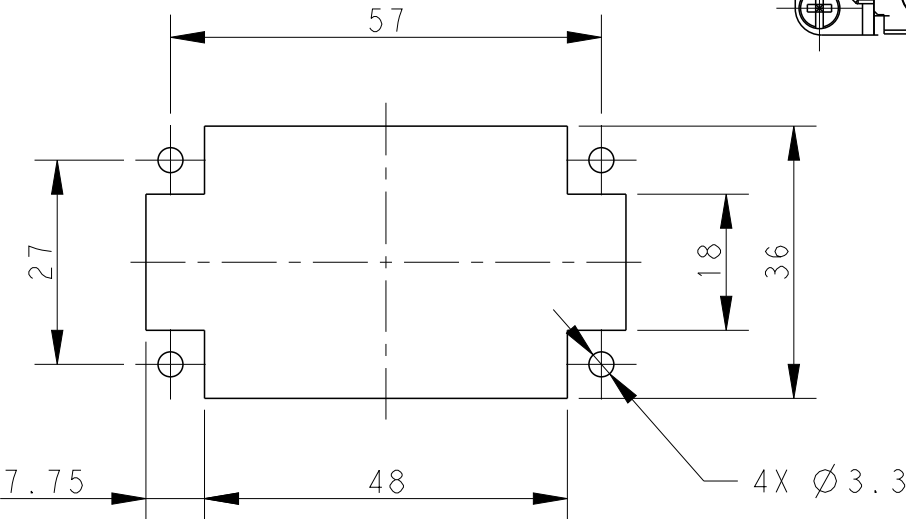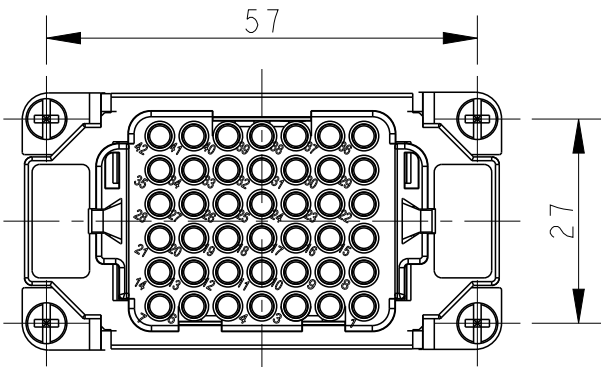

PANEL CUT OUT FOR INSERTS FOR USING
WITHOUT HOODS/HOUSINGS
不使用防护外壳时芯件的安装开孔图

- NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250 V
RATED CURRENT: 10 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 4 KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14-2.5 mm² (26-14 AWG)
CONTACT TYPE: CRIMP CONTACT
 2. CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING: T20200X20XX000)

- 注释:
1. 技术参数:
绝缘材料: PC
额定电压: 250V
额定电流: 10A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 4 KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.14-2.5 mm² (26-14 AWG)
接线类型: 冷压接
 2. 端子需要单独订购.
(订货号参考图面: T20200X20XX000)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 18MAR2015	 TE Connectivity		
		CHK CHRIS WANG 18MAR2015			
		APVD XU XIANG 18MAR2015			
		PRODUCT SPEC 108-137043			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME HDD-042-F		
		0 PLC ±-	SIZE A3 CAGE CODE - DRAWING NO. ©T2030422201000 RESTRICTED TO -		
		1 PLC ±-			
		2 PLC ±-			
		3 PLC ±-			
		4 PLC ±-	APPLICATION SPEC 114-137043		
		ANGLES ±-			
MATERIAL -		FINISH -	WEIGHT -		
CUSTOMER DRAWING			SCALE 1:1 SHEET 1 OF 2 REV E		






REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

NOTES:


SEE SHEET 1

注释：
见页 1

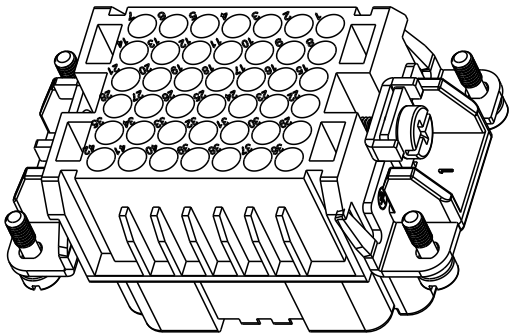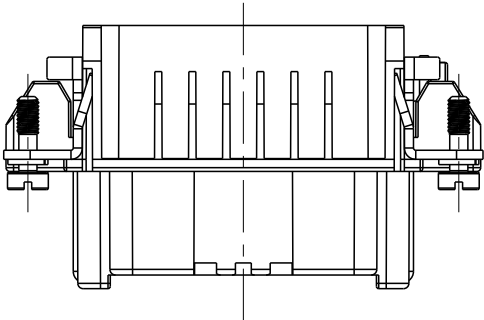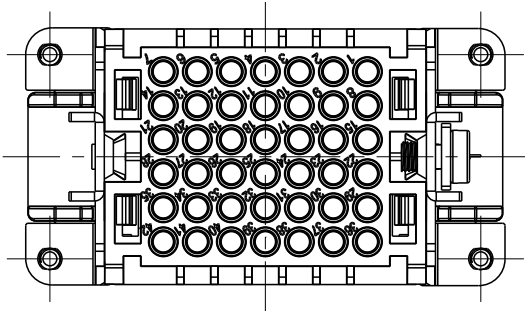


ALL DIMENSIONS ARE SAME AS TYPE 1,
EXCEPT THOSE DEFINED IN THIS TYPE.
除了在本类型中定义的尺寸外，其它尺寸同类型 1

TYPE-2: T2030422201-001 STAINLESS STEEL SCREW, NO LOGO
类 型-2: T2030422201-001 不锈钢螺丝, 无LOGO

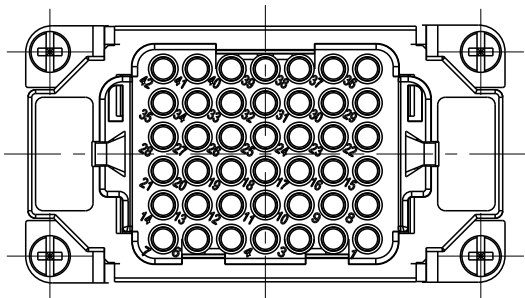

T2030422201-001	HDD-042-F	HDD-042 FEMALE INSERT, CRIMPING SPLIT TYPE, STAINLESS STEEL SCREW, NO LOGO HDD-042 冷压针分体式母插, 不锈钢螺丝, 无LOGO	TYPE-2 类 型-2
T2030422201-000	HDD-042-F	HDD-042 FEMALE INSERT, CRIMPING SPLIT TYPE HDD-042 冷压针分体式母插	TYPE-1 类 型-1
PART NUMBER 料 号	PART DESCRIPTION 描 述		TYPE 类 型

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 18MAR2015		 TE Connectivity					
		CHK CHRIS WANG 18MAR2015							
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME HDD-042-F					
		APVD XU XIANG 18MAR2015		SIZE A3					
		PRODUCT SPEC 108-137043							
		APPLICATION SPEC 114-137043							
		WEIGHT -							
0 PLC ±-		1 PLC ±-		DRAWING NO C-T2030422201000					
2 PLC ±-									
3 PLC ±-									
4 PLC ±-									
ANGLES ±-				RESTRICTED TO -					
MATERIAL - -		FINISH - -							
CUSTOMER DRAWING				SCALE 1:1		SHEET 2 OF 2		REV E	