
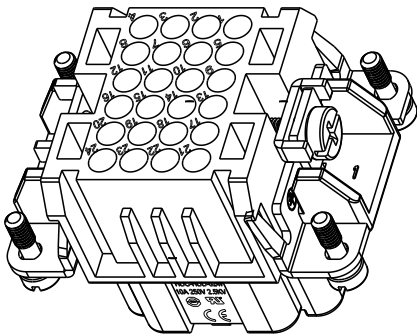


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	19MAR2015	DL	CW
	B	ECR-15-013292	24SEP2015	DL	CW
	C	ECR-21-105887	26JUL2021	BS	CW
	D	ECR-25-237606	30MAY2025	ABS	RB






- NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250 V
RATED CURRENT: 10 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 2.5 KV
POLLUTION DEGREE: 2
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14-2.5 mm² (26-14 AWG)
CONTACT TYPE: ROLLED CRIMP CONTACT
 2. CONTACT NEED TO BE ORDERED SEPARATELY.

- 注释:
1. 技术参数:
绝缘材料: PC
额定电压: 250V
额定电流: 10A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 2.5 KV
污染等级: 2
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.14-2.5 mm² (26-14 AWG)
接线类型: 卷皮式冷压接
 2. 端子需要单独订购.


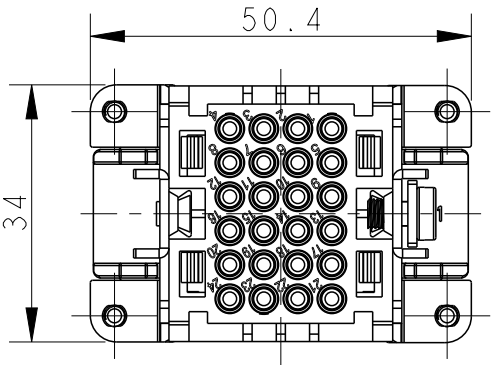


M4 SCREW
RECOMMENDED TIGHTENING TORQUE 1.2Nm

4 X M3 SCREW
RECOMMENDED TIGHTENING TORQUE 0.5Nm

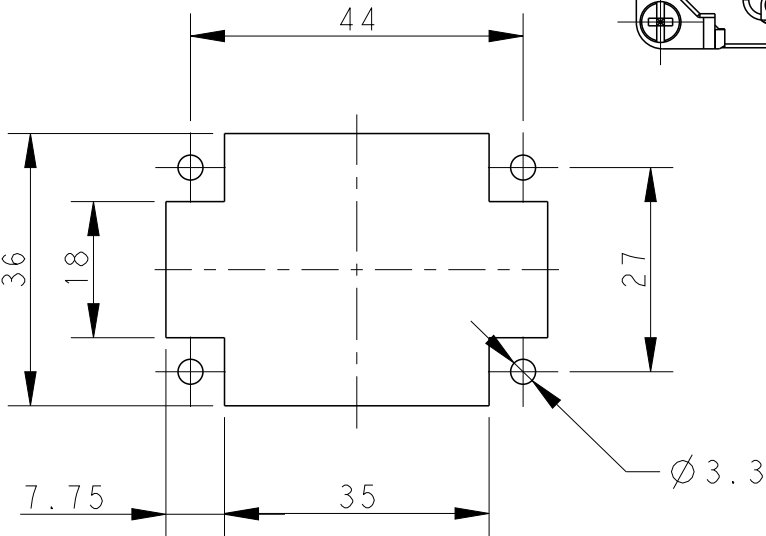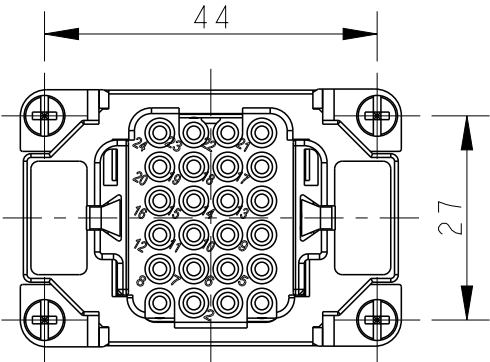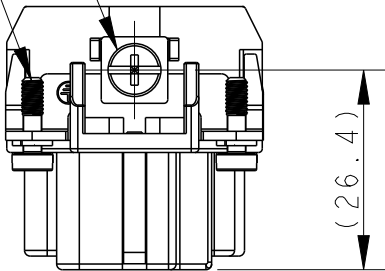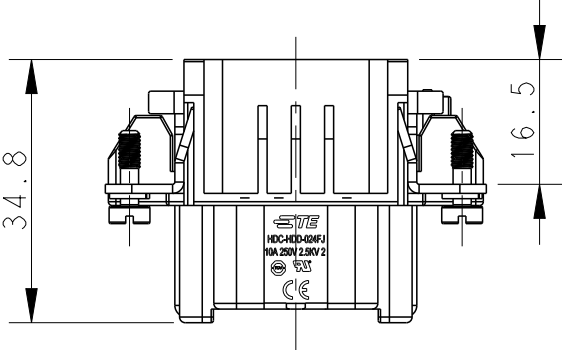

PANEL CUT OUT FOR INSERTS FOR USING
WITHOUT HOODS/HOUSINGS

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 18MAR2015		TE Connectivity							
DIMENSIONS: mm		CHK CHRIS WANG 18MAR2015									
		APVD XU XIANG 18MAR2015		NAME HDD-024-FJ							
		TOLERANCES UNLESS OTHERWISE SPECIFIED:									
		PRODUCT SPEC 108-137043		SIZE A3							
		APPLICATION SPEC 114-137043						CAGE CODE -			
		WEIGHT -								DRAWING NO C-T2030243201000	
		MATERIAL -									
FINISH -		CUSTOMER DRAWING									
MATERIAL -											
SCALE 1:1		SHEET 1 OF 1		REV D							