
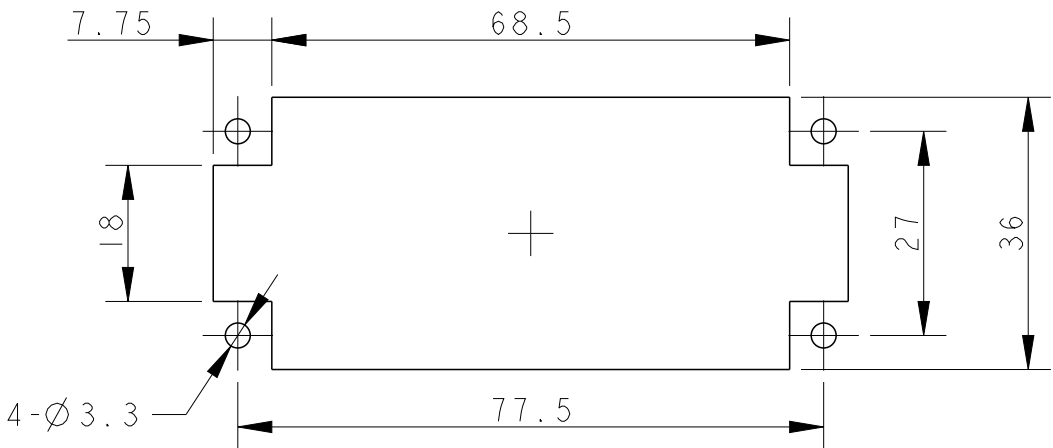
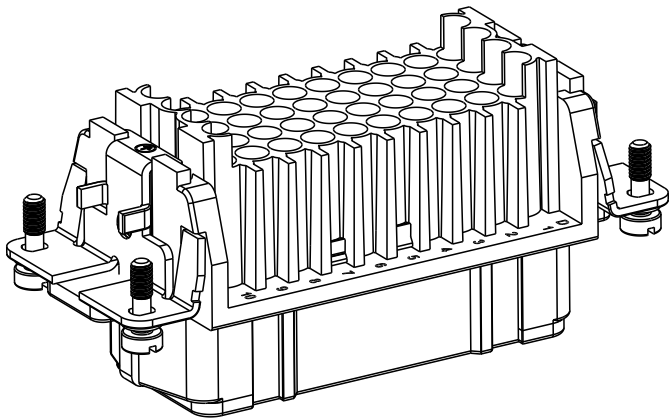
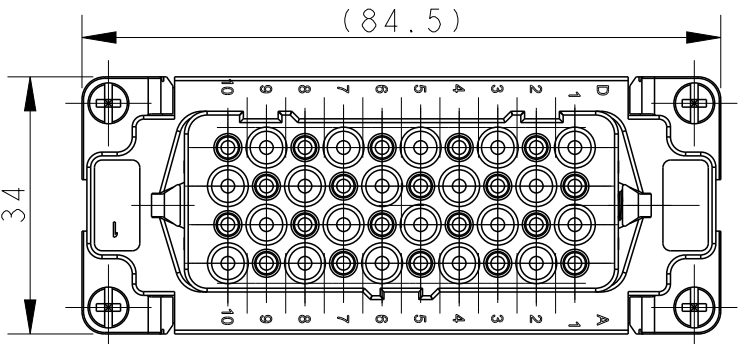
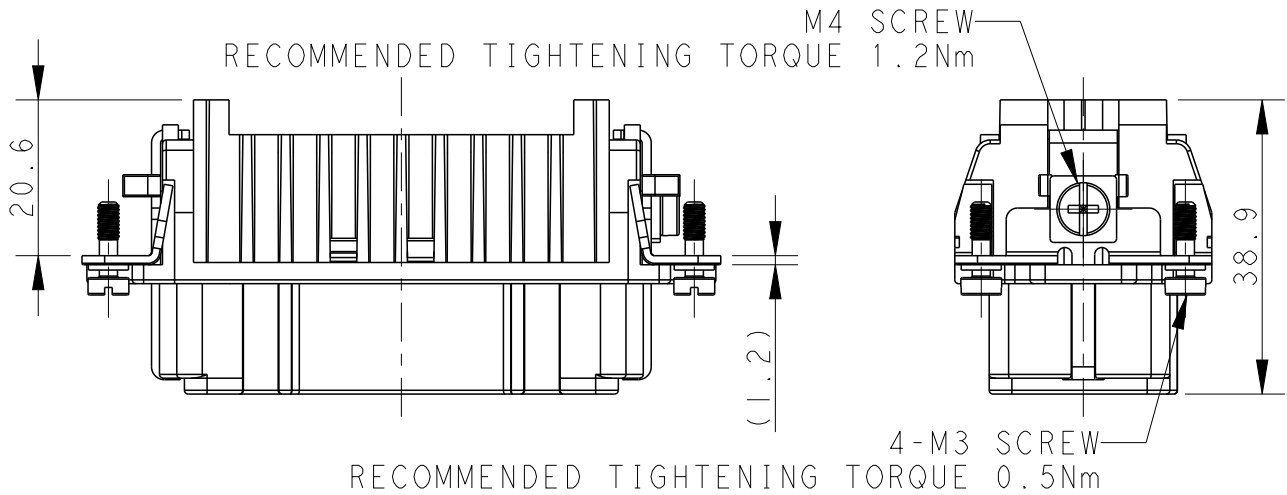


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	16DEC2014	HMR	CW
	B	ECR-15-013292	24SEP2015	DL	CW
	C	ECR-21-105750	30JUN2021	BS	CW
	D	ECR-25-246911	25JUN2025	ABS	RB

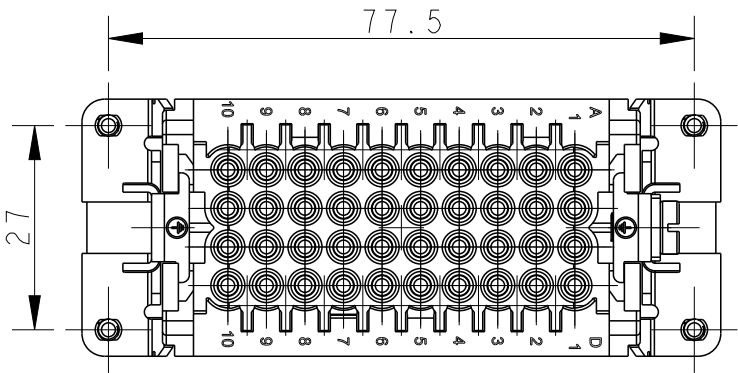


PANEL CUT OUT FOR INSERTS FOR USE WITHOUT HOODS/HOUSINGS

- NOTES:
- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250 V
RATED CURRENT: 10 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 4 KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
OPERATION TEMPERATURE: $-40-+125^{\circ}C$
WIRE RANGE: 0.14-2.5 mm² (26-14 AWG)
CONTACT TYPE: CRIMP CONTACT
 - CONTACT NEED TO BE ORDERED SEPARATELY.

- 注释:
- 技术参数:
绝缘材料: PC
额定电压: 250V
额定电流: 10A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 4 KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
工作温度: $-40-+125^{\circ}C$
接线范围: 0.14-2.5 mm² (26-14 AWG)
接线类型: 冷压接
 - 端子需要单独订购.

HD-040-FJ	T2020402201-100
DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RAGHAVENDRA H M 16DEC2014	 TE Connectivity				
		CHK CHRIS WANG 16DEC2014					
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD XU XIANG 16DEC2014	NAME HD-040-FJ			
	0 PLC ±-		PRODUCT SPEC 108-137042	SIZE A3			
	1 PLC ±-		APPLICATION SPEC 114-137042				
	2 PLC ±-						
	3 PLC ±-			CAGE CODE -			
	4 PLC ±-						
	ANGLES ±-			DRAWING NO C-T2020402201100			
MATERIAL - -	FINISH - -		WEIGHT -				
			CUSTOMER DRAWING	SCALE 1:1			
				SHEET 1 OF 1			
				REV D			