




TYPT-1 / 类型-1

TYPT-2 / 类型-2

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
B1		ECR-16-011552	11AUG2016	QY	CW
B2		ECR-17-004602	01APR2017	CH	CW
C		ECR-21-105750	30JUN2021	BS	CW
D		ECR-25-246911	25JUN2025	ABS	RB

- NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250 V
RATED CURRENT: 10 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 4 KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14-2.5 mm² (26-14 AWG)
CONTACT TYPE: CRIMP CONTACT
 2. CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING:T20200X20XX000)

- 注释:
1. 技术参数:
绝缘材料: PC
额定电压: 250V
额定电流: 10A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 4 KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.14-2.5 mm² (26-14 AWG)
接线类型: 冷压接
 2. 端子需要单独订购.
(订货号参考图面: T20200X20XX000)

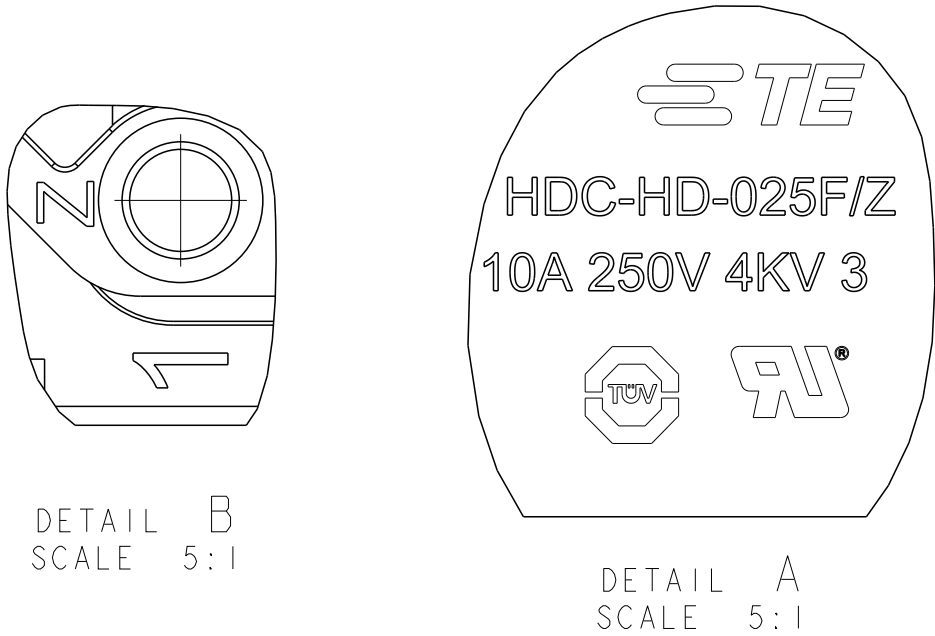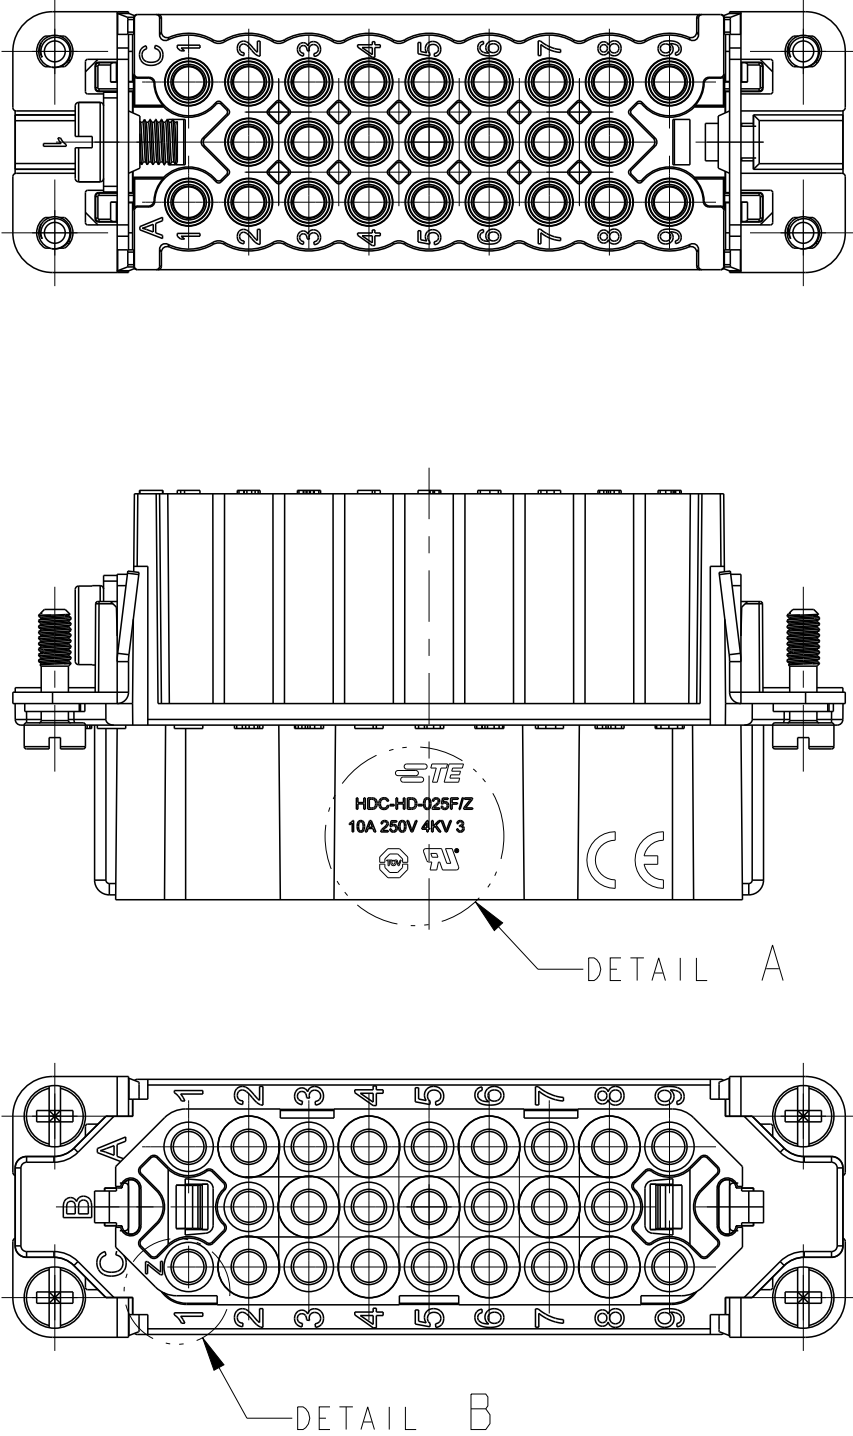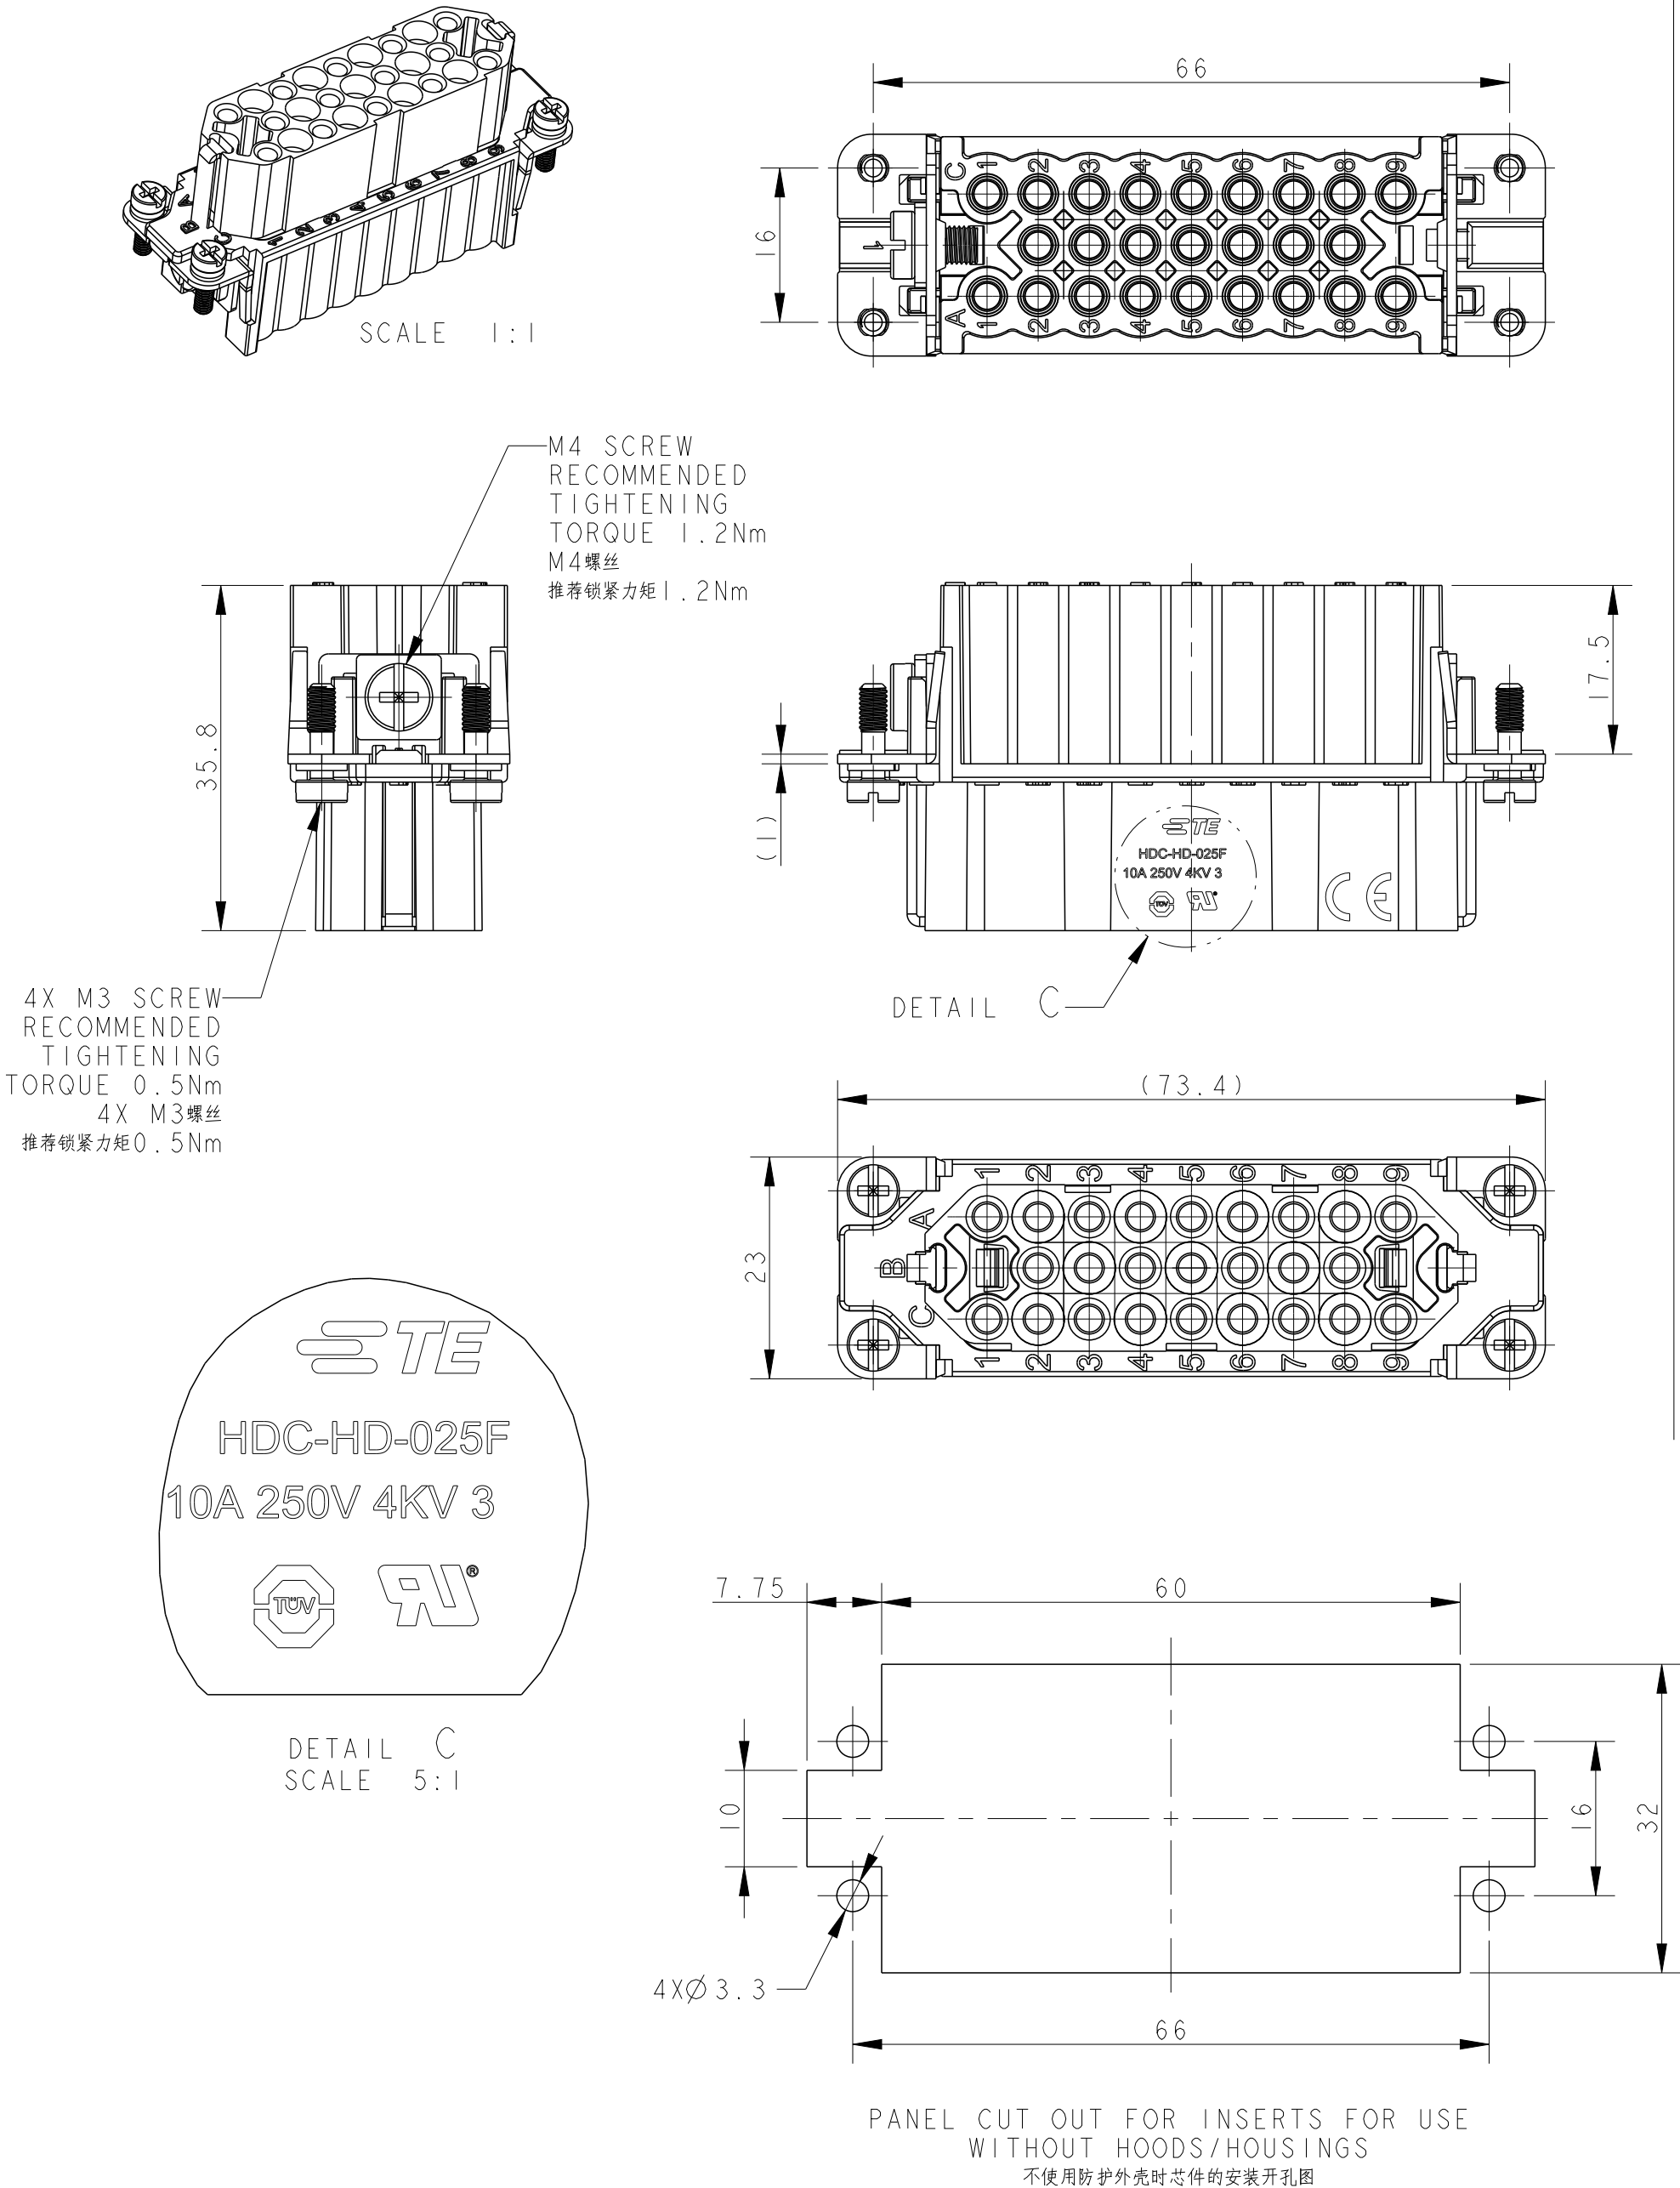

T2020252201-Z00	HD-025-F/Z	HD-025 FEMALE INSERT(Z) HD-025母插(Z)	TYPE-2 类型-2
T2020252201-000	HD-025-F	HD-025 FEMALE INSERT HD-025母插	TYPE-1 类型-1
PART NUMBER 料号	PART DESCRIPTION 描述		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 16JUL2015	TE Connectivity			
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK CHRIS WANG 16JUL2015				
	0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±	APVD XU XIANG 16JUL2015	NAME HD-025-F			
		PRODUCT SPEC 108-137042				
		APPLICATION SPEC 114-137042				
MATERIAL	FINISH	WEIGHT	SIZE A2	CAGE CODE -	DRAWING NO C-T2020252201000	RESTRICTED TO
-	-	-	CUSTOMER DRAWING			
			SCALE 3:2	SHEET 1	OF 1	REV D