


P	LTR	DESCRIPTION	DATE	DWN	APVD
B		ECR-15-013292	16SEP2015	DL	CW
C		ECR-18-016084	13OCT2018	GY	CW
D		ECR-21-105750	06JUL2021	BS	CW
E		ECR-25-246911	26JUN2025	ABS	RB

- NOTES:
- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250 V
RATED CURRENT: 10 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 4 KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
OPERATION TEMPERATURE: $-40-+125^{\circ}C$
WIRE RANGE: 0.14-2.5 mm² (26-14 AWG)
CONTACT TYPE: CRIMP CONTACT
 - CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING:T20200X10XX000)


- 注释:
- 技术参数:
绝缘材料: PC
额定电压: 250V
额定电流: 10A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 4 KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
工作温度: $-40-+125^{\circ}C$
接线范围: 0.14-2.5 mm² (26-14 AWG)
接线类型: 冷压接
 - 端子需要单独订购.
(订货号参考图面: T20200X10XX000)

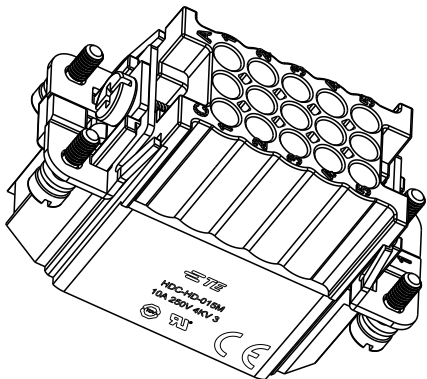


SCALE 1:1


T2020152101-000	HD-015-M	HD-015 MALE INSERT HD-015公插
PART NUMBER 零件料号	PART DESCRIPTION 零件描述	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 16DEC2014 RAGHAVENDRA H M	 TE Connectivity		
		CHK 16DEC2014 CHRIS WANG			
		APVD 16DEC2014 XU XIANG	NAME HD-015-M		
		PRODUCT SPEC 108-137042			
		APPLICATION SPEC 114-137042			
		WEIGHT -	SIZE A3	CAGE CODE -	DRAWING NO C-T2020152101000
CUSTOMER DRAWING		SCALE 3:2	SHEET 1	OF 1	REV E





DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
		0 PLC	±
		1 PLC	±
		2 PLC	±
		3 PLC	±
		4 PLC	±
		ANGLES	±
MATERIAL		FINISH	-
			-

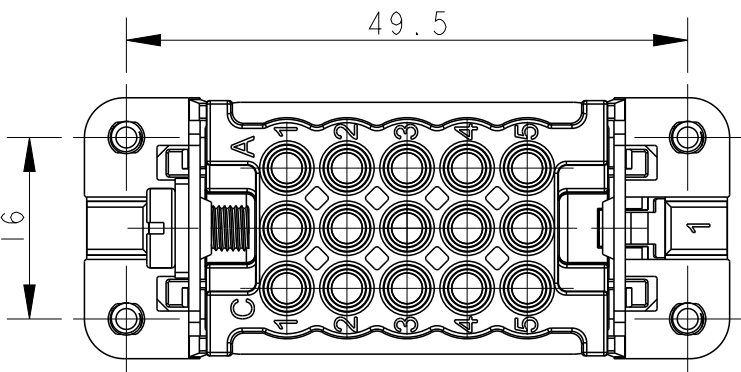

M4 SCREW
RECOMMENDED TIGHTENING TORQUE 1.2Nm

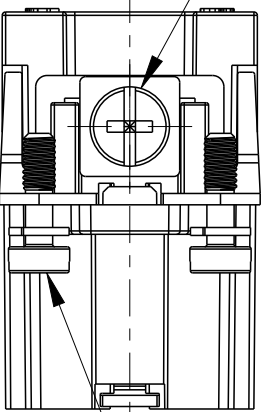

4-M3 SCREW
RECOMMENDED TIGHTENING TORQUE 0.5Nm

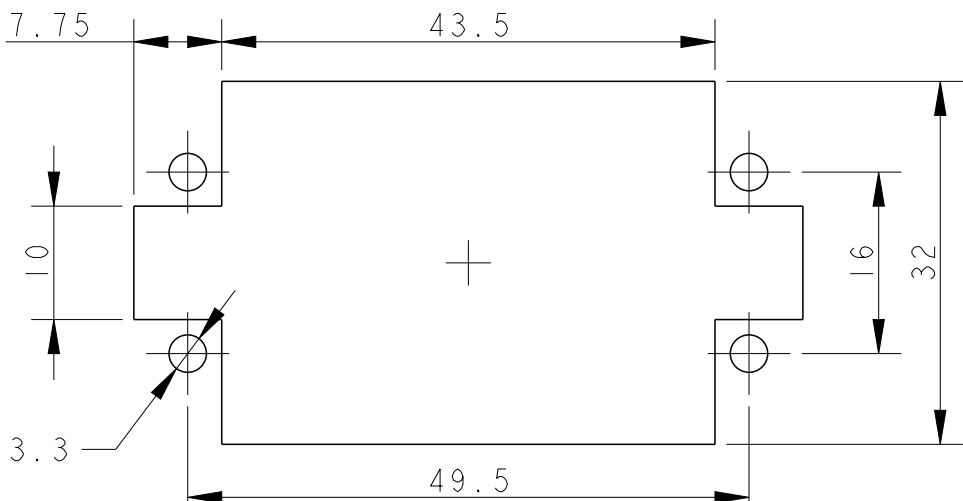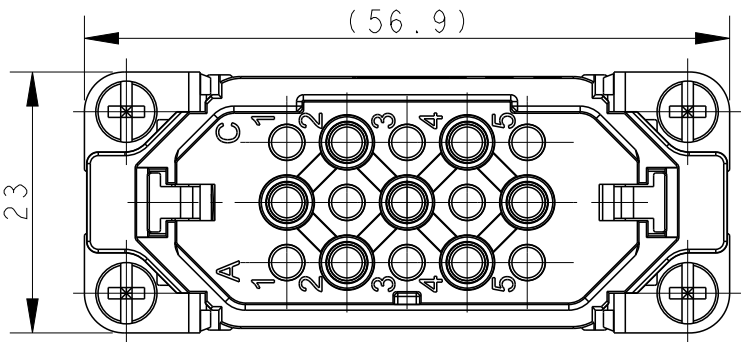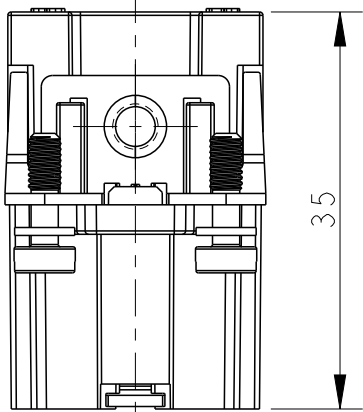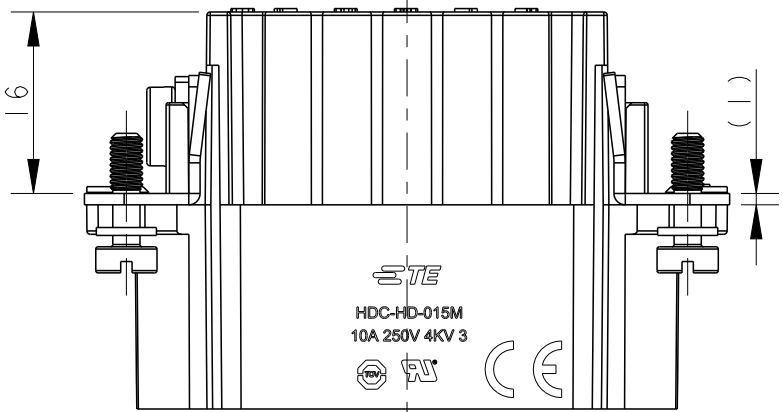

PANEL CUT OUT FOR INSERTS FOR USE
WITHOUT HOODS/HOUSINGS