

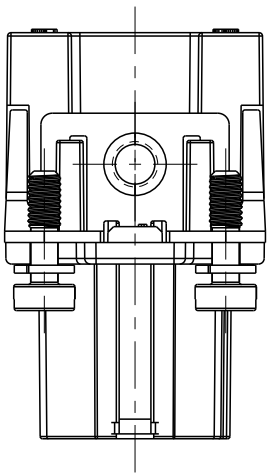
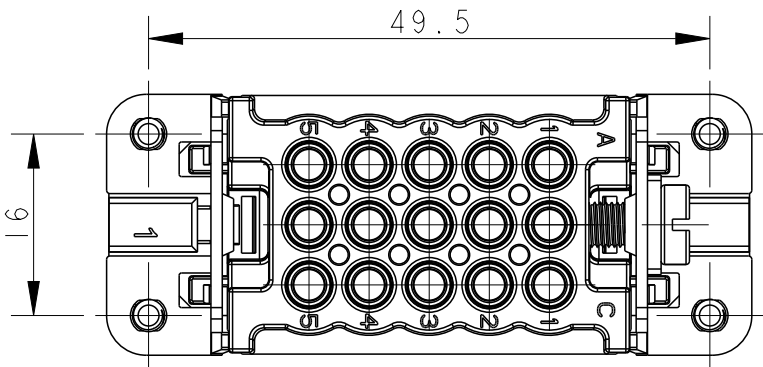




P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-15-013292	16SEP2015	DL	-
	C	ECR-21-105750	06JUL2021	BS	CW
	CI	ECR-22-142297	13JUN2022	AC	CW
	D	ECR-25-246911	26JUN2025	ABS	RB

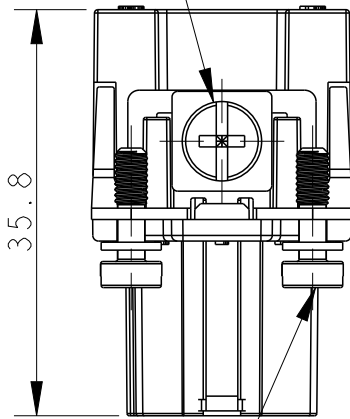

M4 SCREW
RECOMMENDED TIGHTENING TORQUE 1.2Nm

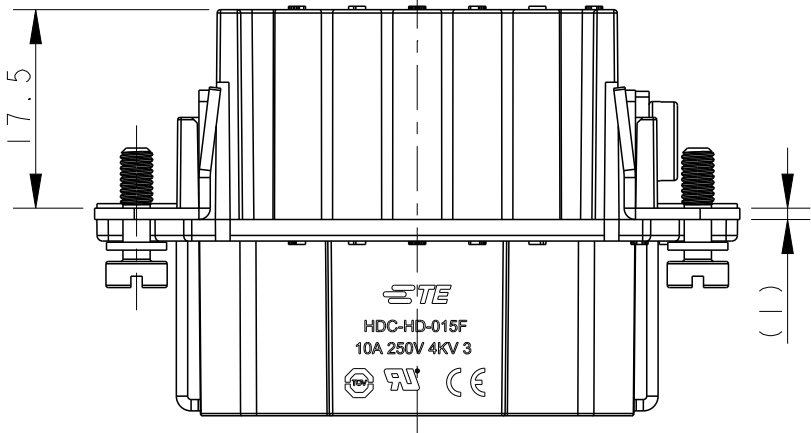


RECOMMENDED TIGHTENING TORQUE 0.5Nm

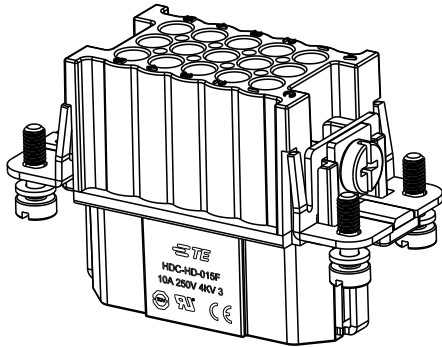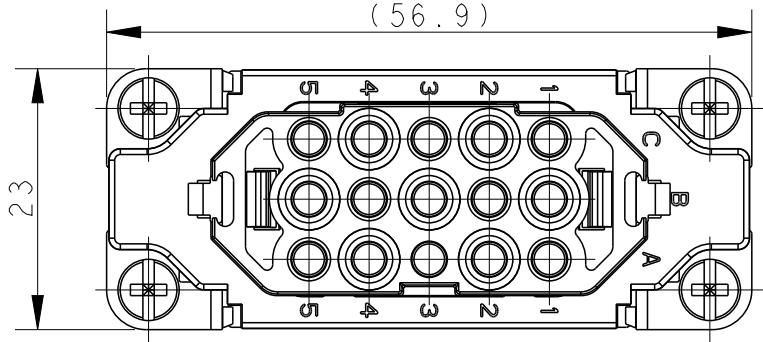

SCALE 1:1

- NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250 V
RATED CURRENT: 10 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 4 KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
OPERATION TEMPERATURE: $-40-+125^{\circ}C$
WIRE RANGE: 0.14-2.5 mm² (26-14 AWG)
CONTACT TYPE: CRIMP CONTACT
 2. CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING:T20200X20XX000)

- 注释:
1. 技术参数:
绝缘材料: PC
额定电压: 250V
额定电流: 10A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 4 KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
工作温度: $-40-+125^{\circ}C$
接线范围: 0.14-2.5 mm² (26-14 AWG)
接线类型: 冷压接
 2. 端子需要单独订购.
(订货号参考图面: T20200X20XX000)

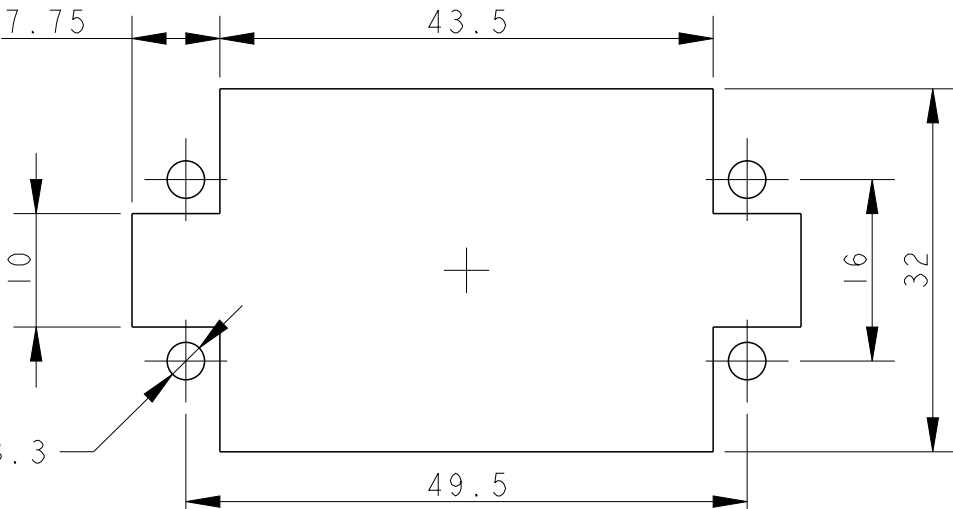

PANEL CUT OUT FOR INSERTS FOR USE
WITHOUT HOODS/HOUSINGS

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 16DEC2014 RAGHAVENDRA H M	TE Connectivity		
		CHK 16DEC2014 CHRIS WANG			
		APVD 16DEC2014 XU XIANG	NAME HD-015-F		
		PRODUCT SPEC 108-137042			
		APPLICATION SPEC 114-137042	SIZE A3		
		WEIGHT -			
		CUSTOMER DRAWING	SCALE 3:2		
			SHEET 1 OF 1		
			REV D		