
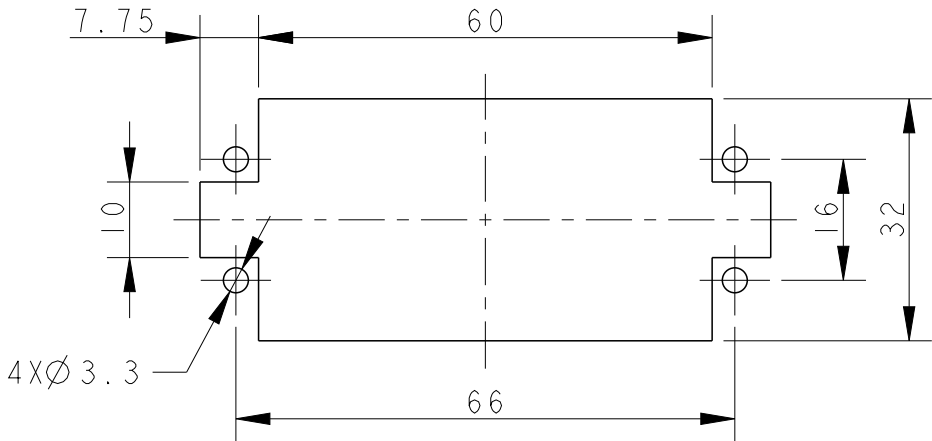
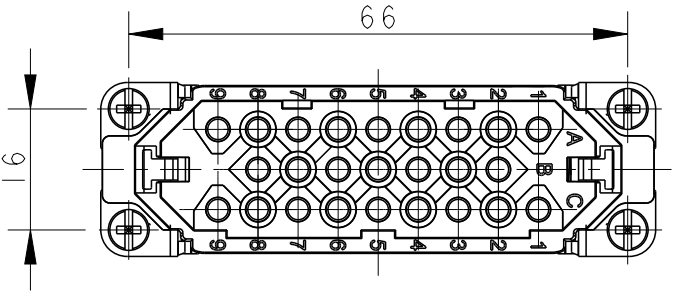
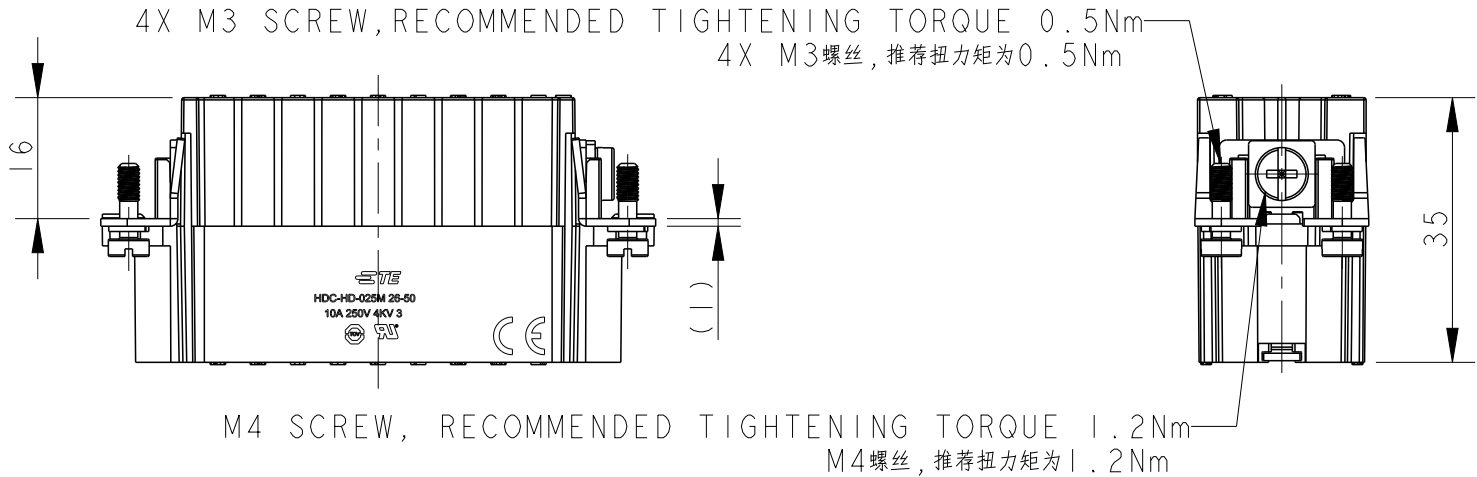



P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	29NOV2016	YC	CW
	B	ECR-21-105750	30JUN2021	BS	CW
	C	ECR-25-246911	09JUL2025	ABS	RB

- NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250 V
RATED CURRENT: 10 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 4 KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14-2.5 mm² (26-14 AWG)
CONTACT TYPE: CRIMP CONTACT
2. CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING:T20200X10XX000)

- 注释:
1. 技术参数:
绝缘材料: PC
额定电压: 250V
额定电流: 10A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 4 KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.14-2.5 mm² (26-14 AWG)
接线类型: 冷压接
2. 端子需要单独订购.
(订货号参考图面: T20200X10XX000)

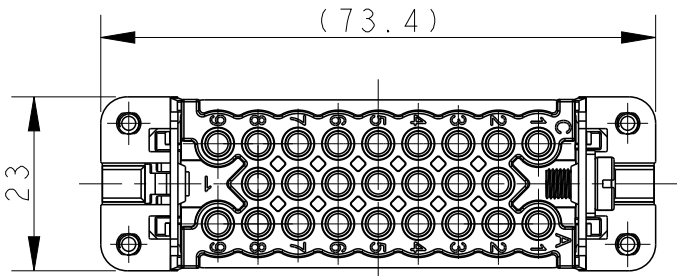

PANEL CUT OUT DIMENSION FOR INSERT
WITHOUT HOODS/HOUSING, ONLY FOR REFERENCE
不使用防护外壳时芯件的开孔安装尺寸, 仅供参考

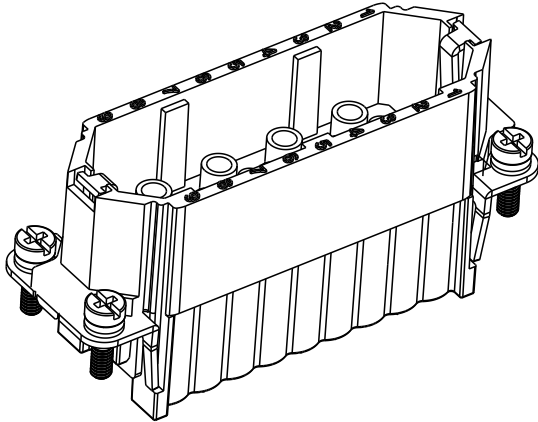

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC ±0.1 1 PLC ±0.1 2 PLC ±0.1 3 PLC ±0.1 4 PLC ±0.1 ANGLES ±0.1
MATERIAL	FINISH
-	-

DWN	29NOV2016					TE Connectivity			
YORK CHEN									
CHK	29NOV2016								
KYLE ZENG									
APVD	29NOV2016	NAME							
CHRIS WANG		HD-025-M 26-50							
PRODUCT SPEC									
108-137042									
APPLICATION SPEC									
114-137042									
WEIGHT									
-									
		SIZE	CAGE CODE	DRAWING NO				RESTRICTED TO	
		A3	00779	C-T2020502101000				-	
CUSTOMER DRAWING				SCALE		SHEET		OF	REV
				1:1		1			C