

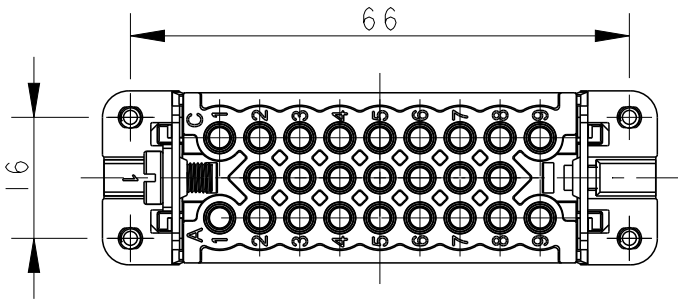
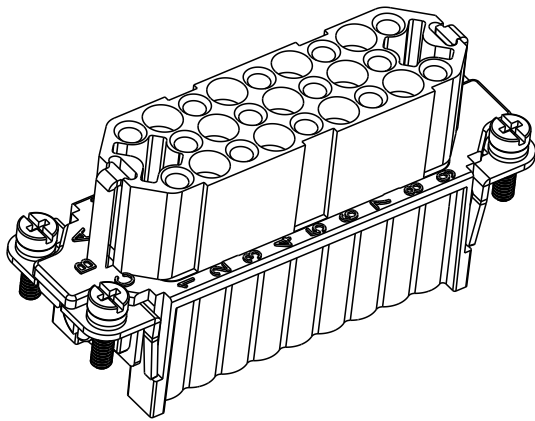




P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	29NOV2016	YC	CW
	B	ECR-21-105750	30JUN2021	BS	CW
	C	ECR-25-246911	25JUN2025	ABS	RB

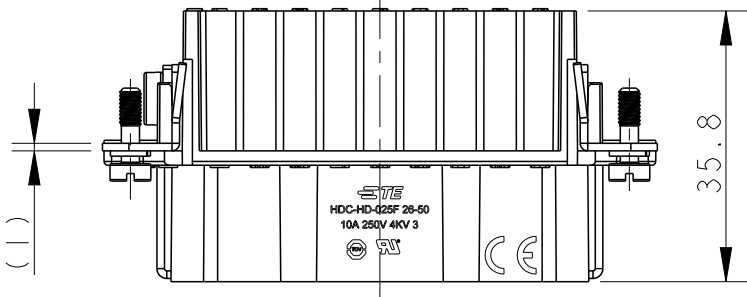

M4 SCREW, RECOMMENDED TIGHTENING TORQUE 1.2Nm
M4螺丝, 推荐扭力矩为1.2Nm



4X M3 SCREW, RECOMMENDED TIGHTENING TORQUE 0.5Nm
4X M3螺丝, 推荐扭力矩为0.5Nm

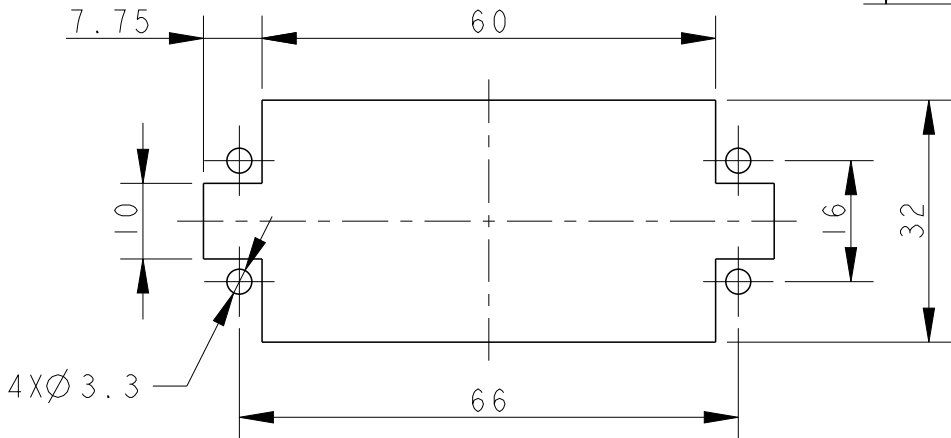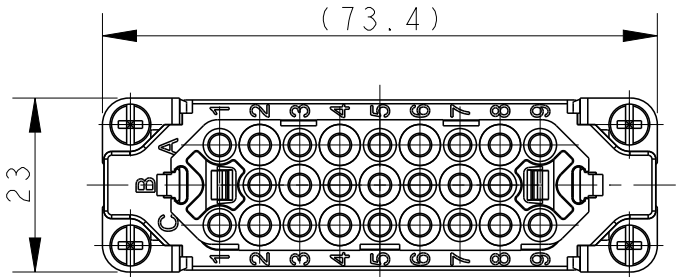

PANEL CUT OUT DIMENSION FOR INSERT
WITHOUT HOODS/HOUSING, ONLY FOR REFERENCE
不使用防护外壳时芯件的开孔安装尺寸, 仅供参考

NOTES:

- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250 V
RATED CURRENT: 10 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 4 KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14-2.5 mm² (26-14 AWG)
CONTACT TYPE: CRIMP CONTACT
- CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING: T20200X20XX000)

注释:

- 技术参数:
绝缘材料: PC
额定电压: 250V
额定电流: 10A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 4 KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.14-2.5 mm² (26-14 AWG)
接线类型: 冷压接
- 端子需要单独订购.
(订货号参考图面: T20200X20XX000)

T2020502201-000	HD-025-F 26-50	HD-025 FEMALE INSERT 26-50 HD-025 母插 26-50			
PART NUMBER 料号		PART DESCRIPTION 描述			
DWN YORK CHEN 29NOV2016 CHK KYLE ZENG 29NOV2016 APVD CHRIS WANG 29NOV2016 PRODUCT SPEC 108-137042 APPLICATION SPEC 114-137042 WEIGHT -		NAME HD-025-F 26-50 SIZE A300779 CAGE CODE 00779 DRAWING NO T2020502201000 RESTRICTED TO -			
CUSTOMER DRAWING		SCALE 1:1	SHEET 1 OF 1	REV C	

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±
MATERIAL -	FINISH -