
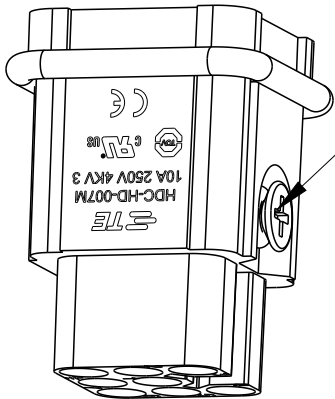


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-15-013292	16SEP2015	DL	CW
	BI	ECR-16-015492	04NOV2016	QY	CW
	C	ECR-21-105750	02JUL2021	BS	CW
	D	ECR-25-246911	24JUN2025	ABS	RB

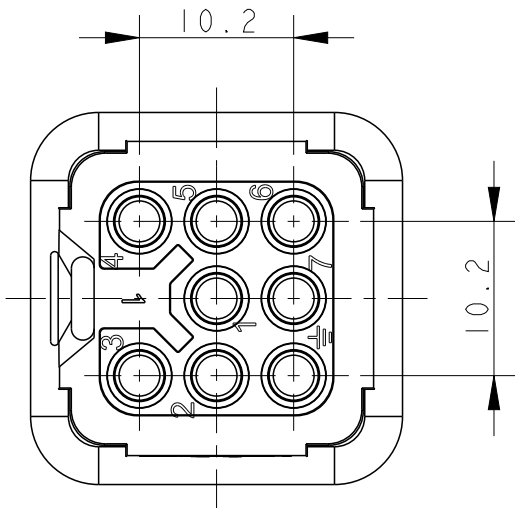




M3 SCREW
RECOMMENDED TIGHTENING
TORQUE 0.5Nm
M3 螺丝, 推荐锁紧力矩0.5Nm


SCALE 3:2

TYPE-1,T2020072101-000,TE LOGO
类型-1,T2020072101-000,TE LOGO

- NOTES:
- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PBT
RATED VOLTAGE: 250 V
RATED CURRENT: 10 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 4 kV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14-2.5 mm² (26-14 AWG)
CONTACT TYPE: CRIMP CONTACT
 - CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING:T20200X10XX000)

- 注释:
- 技术参数:
绝缘材料: PBT
额定电压: 250V
额定电流: 10A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 4 kV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.14-2.5 mm² (26-14 AWG)
接线类型: 冷压接
 - 端子需要单独订购.
(订货号参考图面: T20200X10XX000)

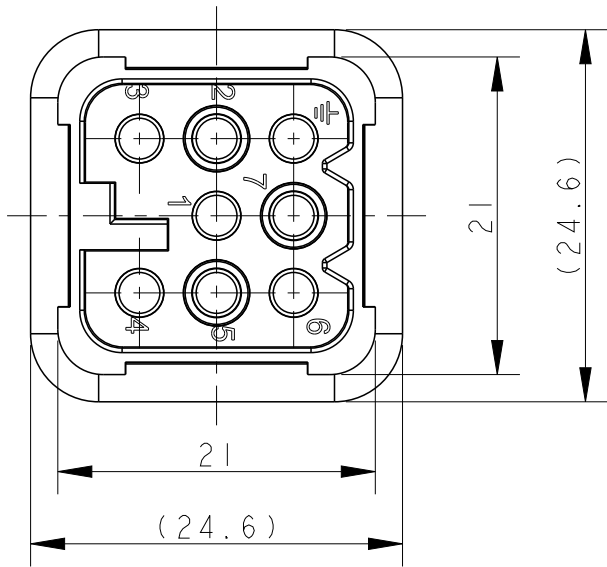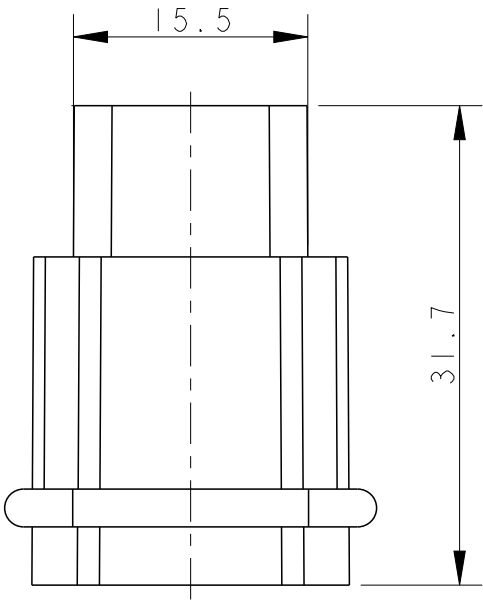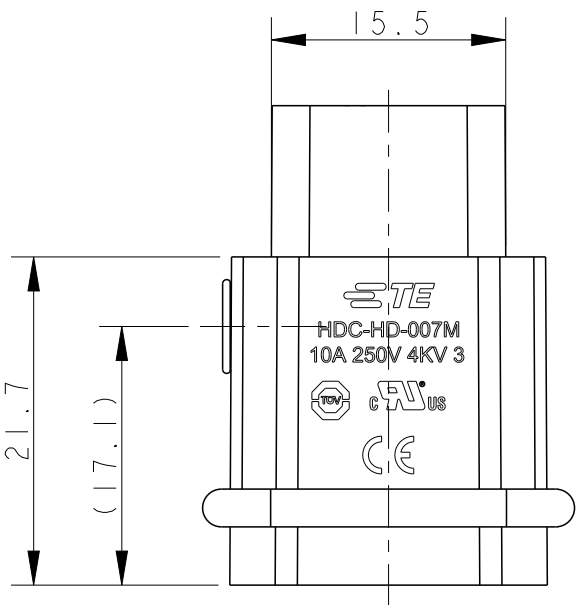

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RAGHAVENDRA H M 16DEC2014	 TE Connectivity											
		CHK CHRIS WANG 16DEC2014												
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD XU XIANG 16DEC2014	NAME HD-007-M											
	0 PLC ±-	PRODUCT SPEC 108-137042	SIZE A3											
	1 PLC ±-	APPLICATION SPEC 114-137042							CAGE CODE -		DRAWING NO C-T2020072101000		RESTRICTED TO	
	2 PLC ±-													
3 PLC ±-														
4 PLC ±-														
ANGLES ±-														
MATERIAL TBD	FINISH -	WEIGHT -												
-	-		CUSTOMER DRAWING				SCALE 2:1	SHEET 1 OF 2	REV D					





REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-


NOTE :

SEE SHEET 1

注释：
见页 1

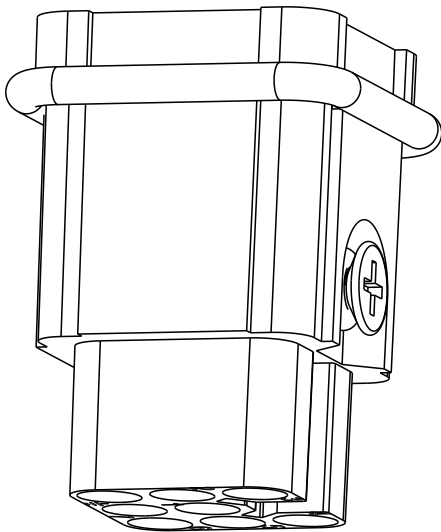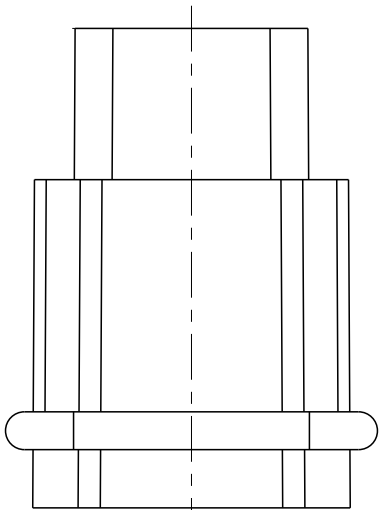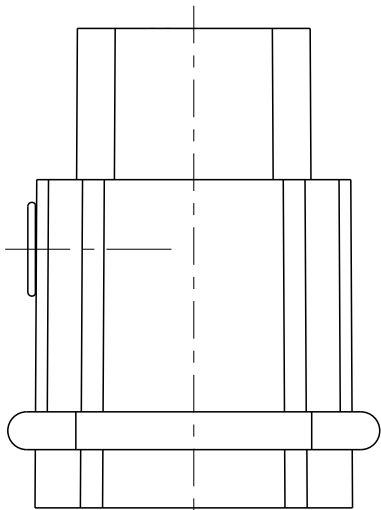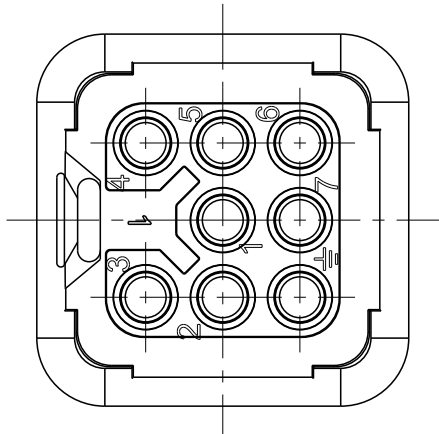

TYPE-2, T2020072101-001, STAINLESS STEEL SCREW, NO LOGO
类型-2, T2020072101-001, 不锈钢螺丝, 无LOGO

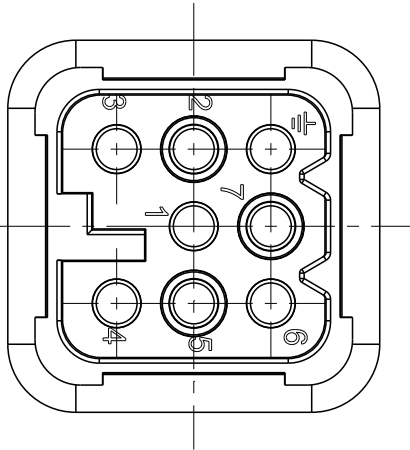

ALL DIMENSIONS ARE SAME AS TYPE 1,
EXCEPT THOSE DEFINED IN THIS TYPE.
除了在本类型中定义的尺寸外, 其它尺寸同类型 1

T2020072101-001	HD-007-M	HD-007 MALE INSERT, STAINLESS STEEL SCREW, NO LOGO HD-007 公插, 不锈钢螺丝, 无LOGO	TYPE-2 类 型-2
T2020072101-000	HD-007-M	HD-007 MALE INSERT HD-007 公插	TYPE-1 类 型-1
PART NUMBER 料 号	PART DESCRIPTION 描 述		TYPE 类 型
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 16DEC2014 RAGHAVENDRA H M CHK 16DEC2014 CHRIS WANG APVD 16DEC2014 XU XIANG PRODUCT SPEC 108-137042 APPLICATION SPEC 114-137042 WEIGHT - CUSTOMER DRAWING	NAME HD-007-M SIZE A3 CAGE CODE - DRAWING NO C-T2020072101000 RESTRICTED TO SCALE 2:1 SHEET 2 OF 2 REV D
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH - -	
MATERIAL TBD -			