

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B1	ECR-15-017530	02DEC2015	GY	CW
	B2	ECR-16-015492	08NOV2016	QY	CW
	C	ECR-21-105750	30JUN2021	BS	CW
	D	ECR-25-246911	26JUN2025	ABS	RB

- NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250 V
RATED CURRENT: 10 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 4 KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14-2.5 mm² (26-14 AWG)
CONTACT TYPE: CRIMP CONTACT
 2. CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING:T20200X20XX000)

- 注释:
1. 技术参数:
绝缘材料: PC
额定电压: 250V
额定电流: 10A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 4 KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.14-2.5 mm² (26-14 AWG)
接线类型: 冷压接
 2. 端子需要单独订购.
(订货号参考图面: T20200X20XX000)








4X M3 SCREW RECOMMENDED
TIGHTENING TORQUE 0.5Nm
4X M3螺丝, 推荐锁紧力矩0.5Nm

M4 SCREW RECOMMENDED
TIGHTENING TORQUE 1.2Nm
M4 螺丝, 推荐锁紧力矩1.2Nm

TYPE-1,T2020402201-000,TE LOGO
类型-1,T2020402201-000,TE LOGO

TYPE-2,T2020402201-001,STAINLESS STEEL SCREW,TE LOGO
类型-2,T2020402201-001,不锈钢螺丝,TE LOGO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 16DEC2014 RAGHAVENDRA H M	 TE Connectivity		
		CHK 16DEC2014 CHRIS WANG			
		APVD 16DEC2014 XU XIANG	NAME HD-040-F		
DIMENSIONS: mm		PRODUCT SPEC 108-137042			
		APPLICATION SPEC -			
MATERIAL -		WEIGHT -	SIZE A3	CAGE CODE -	DRAWING NO T2020402201000
		CUSTOMER DRAWING	SCALE 1:1	SHEET 1 OF 2	REV D

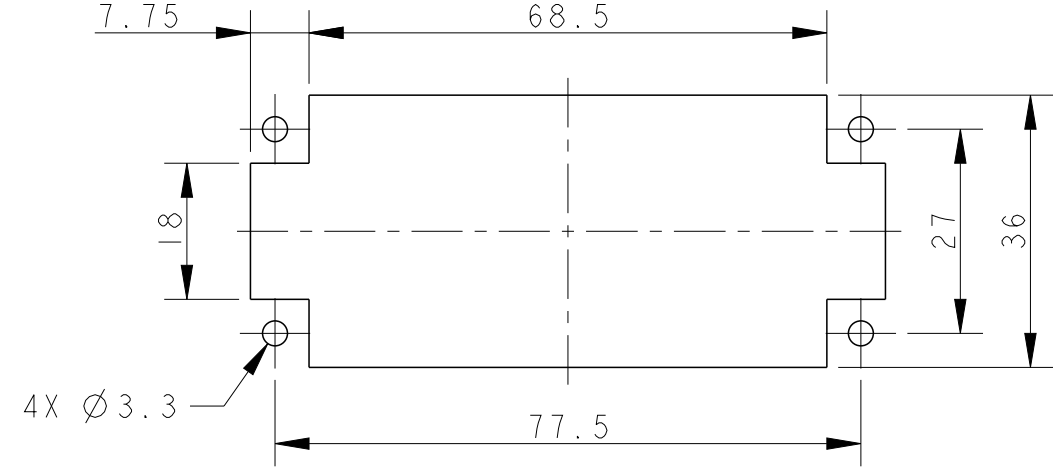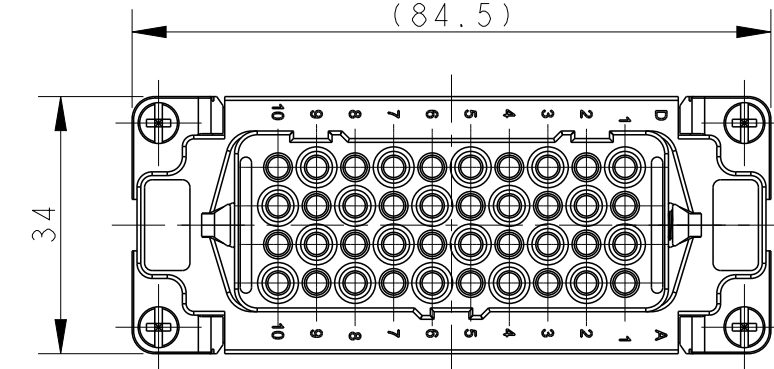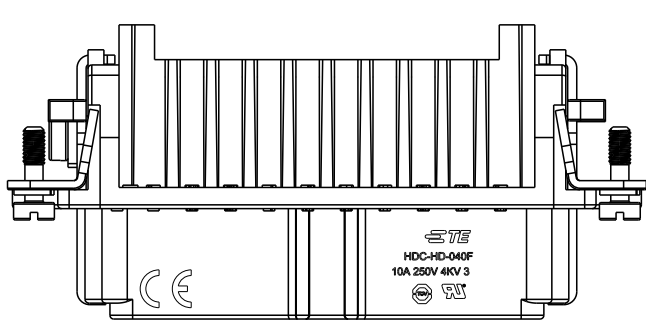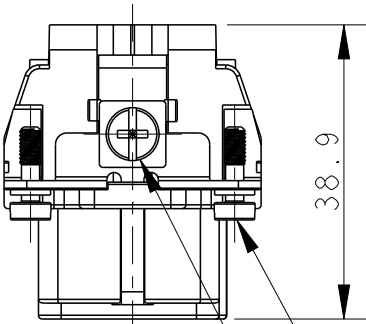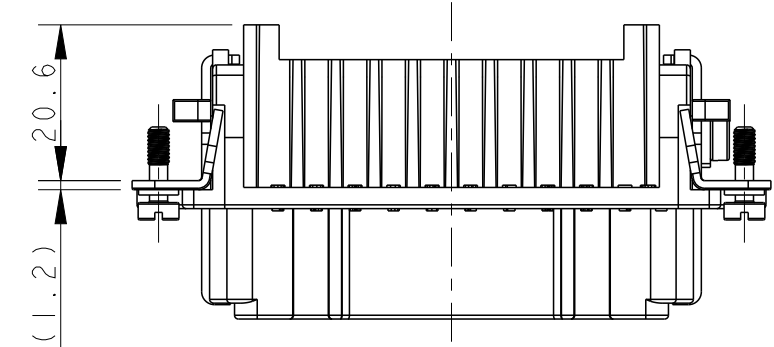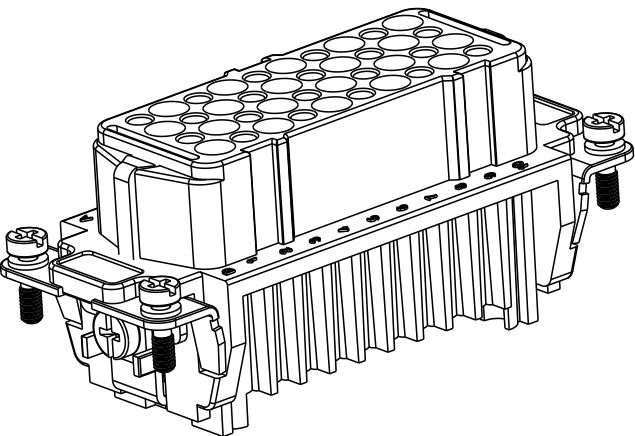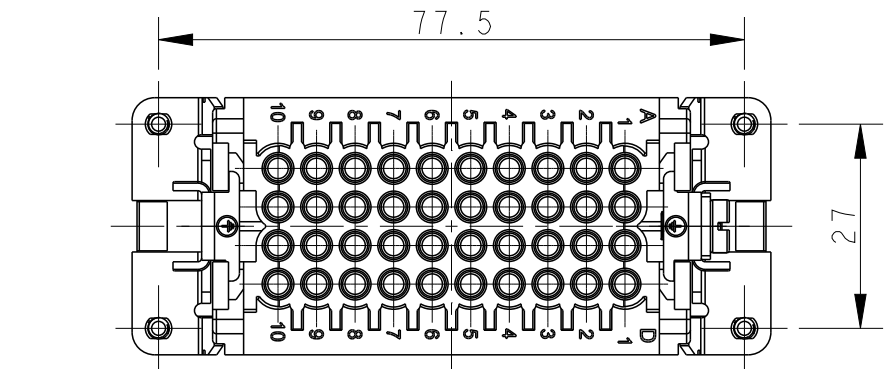

PANEL CUT OUT FOR INSERTS FOR USE
WITHOUT HOODS/HOUSINGS
不用防护外壳时芯件的安装开孔图

REVISIONS







P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

NOTE:

SEE SHEET 1

注释:


见页 1

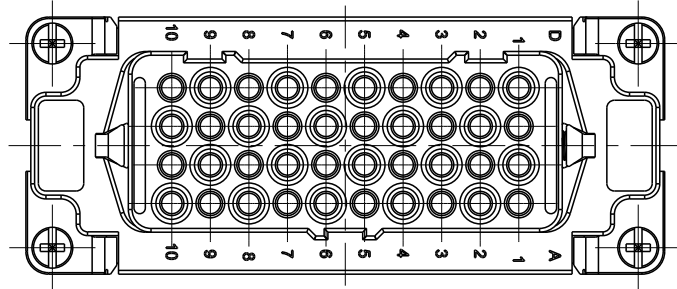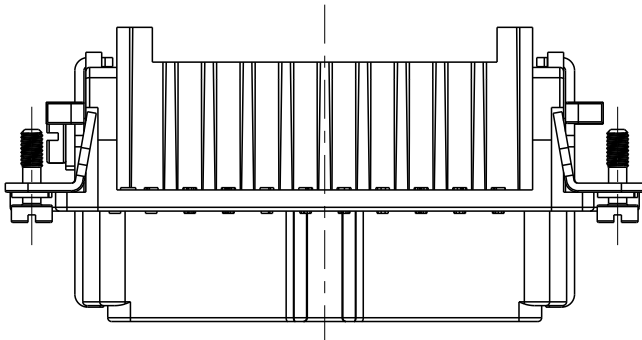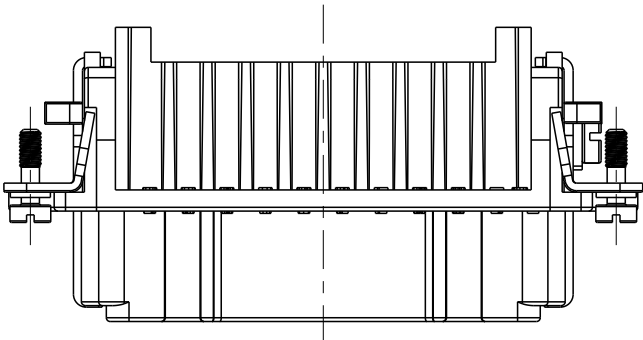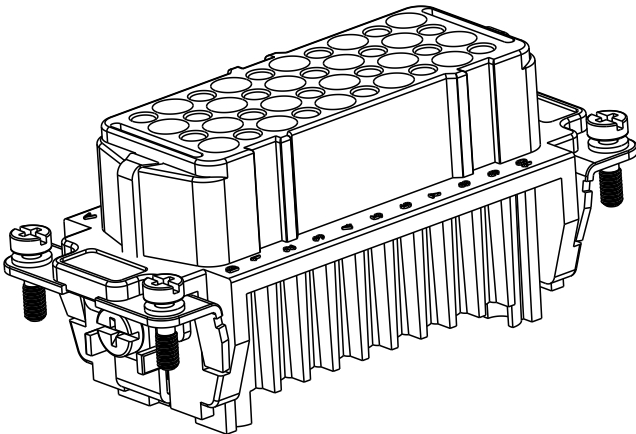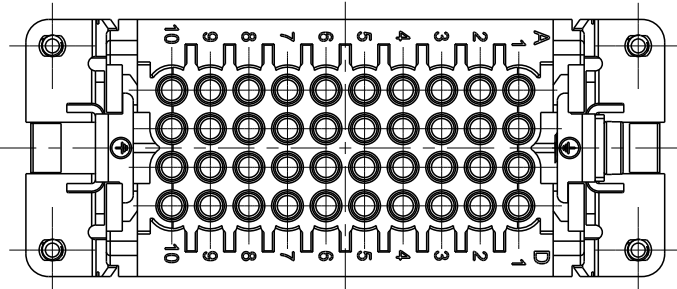

TYPE-3, T2020402201-002, STAINLESS STEEL SCREW, NO LOGO
类型-3, T2020402201-002, 不锈钢螺丝, 无LOGO

ALL DIMENSIONS ARE SAME AS TYPE 1,
EXCEPT THOSE DEFINED IN THIS TYPE.
除了在本类型中定义的尺寸外, 其它尺寸同类型 1

T2020402201-002	HD-040-F	HD-040 FEMALE INSERT, STAINLESS STEEL SCREW, NO LOGO HD-040 母插, 不锈钢螺丝, 无LOGO	TYPE-3 类 型-3
T2020402201-001	HD-040-F	HD-040 FEMALE INSERT, STAINLESS STEEL SCREW HD-040 母插, 不锈钢螺丝	TYPE-2 类 型-2
T2020402201-000	HD-040-F	HD-040 FEMALE INSERT HD-040 母插	TYPE-1 类 型-1
PART NUMBER 料 号	PART DESCRIPTION 描 述		TYPE 类 型

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 16DEC2014 RAGHAVENDRA H M	 TE Connectivity					
		CHK 16DEC2014 CHRIS WANG						
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD 16DEC2014 XU XIANG	NAME HD-040-F					
	0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-	PRODUCT SPEC 108-137042						
MATERIAL - -	FINISH - -	APPLICATION SPEC -	SIZE	CAGE CODE	DRAWING NO			RESTRICTED TO
		WEIGHT -	A3	-	C-T2020402201000			-
CUSTOMER DRAWING			SCALE 1:1		SHEET 2 OF 2		REV D	