



TYPT-2 / 类型-2

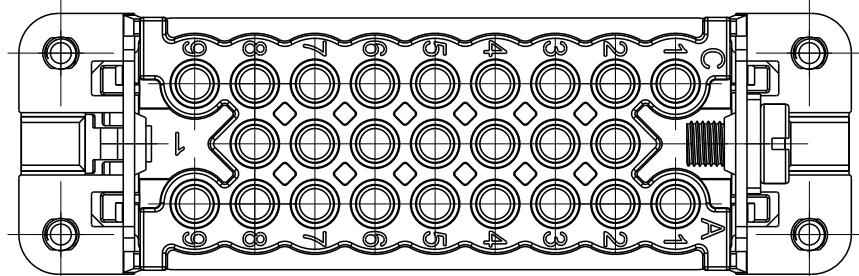


4X M3 SCREW
TORQUE 0.5Nm
4X M3螺丝
推荐锁紧力矩0.5Nm

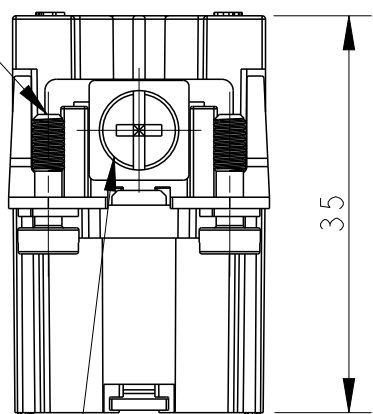


RECOMMENDED TIGHTENING TORQUE 1.2Nm
M4螺丝
推荐锁紧力矩 1.2Nm

M4 SCREW
TORQUE 1.2Nm
M4螺丝
推荐锁紧力矩 1.2Nm

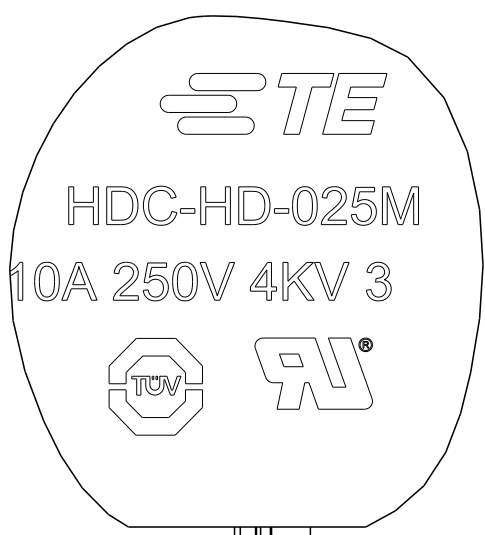


DETAIL C
SCALE 5:1

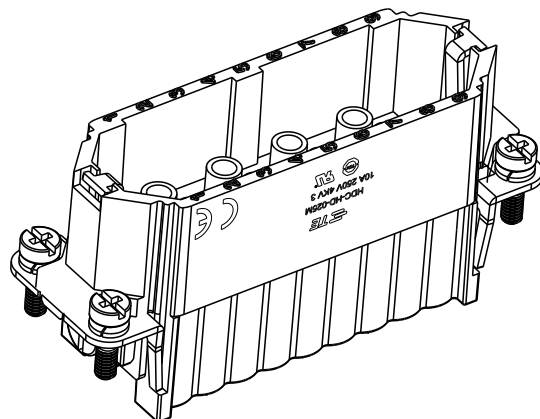


SCALE 1:1

NOTE: TYPE-2 ALL THE DIMENSIONS ARE THE SAME WITH TYPE-1 EXCEPT THE LASER PRINT MARKINGS
提示：类型-2的所有尺寸与类型-1一致，除了激光打标不一样，详见视图


提示：类型-2的所有尺寸与类型-1一致，除了激光打标不一样，详见视图

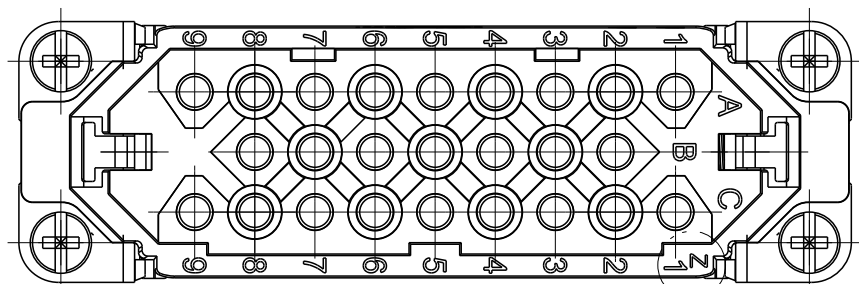

-DETAIL B



DETAIL B
SCALE 5:1

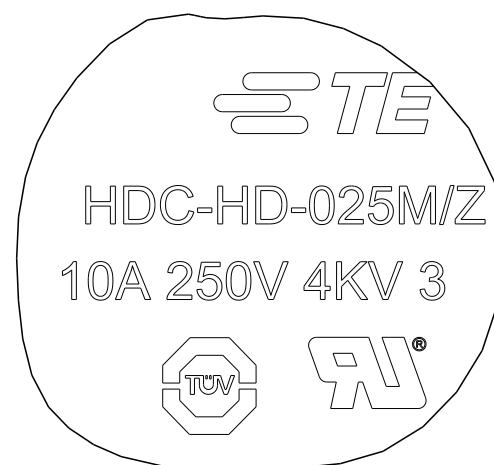

DETAIL A
SCALE 5:1

NOTES:

1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250 V
RATED CURRENT: 10 A
INSULATION RESISTANCE: $\geq 400\text{M}\Omega$
RATED IMPULSE VOLTAGE: 4 KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14-2.5 mm² (26-14 AWG)
CONTACT TYPE: CRIMP CONTACT
2. CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING: T20200X10XX000)

注释：

- 技术参数：
绝缘材料：PC
额定电压：250V
额定电流：10A
绝缘电阻： $>=400M\Omega$
额定脉冲电压：4KV
污染等级：3
阻燃等级：UL94V-0
插拔次数：500次
接线范围：0.14-2.5 mm² (26-14 AWG)
接线类型：冷压接
- 端子需要单独订购。
(订货号参考图面：T20200X10XX000)

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN 16DEC2014 RAGHAVENDRA H M		 TE Connectivity					
			CHK 16DEC2014 CHRIS WANG							
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:			NAME HD-025-M					
mm		APVD 16DEC2014 XU XIANG								
		PRODUCT SPEC 108-137042								
		APPLICATION SPEC 114-137042								
MATERIAL		FINISH		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO			
TBD		-		A2	-	C=T2020252101000				
-		-		CUSTOMER DRAWING			SCALE	SHEET	OF	REV
							3:2	1	0	D