


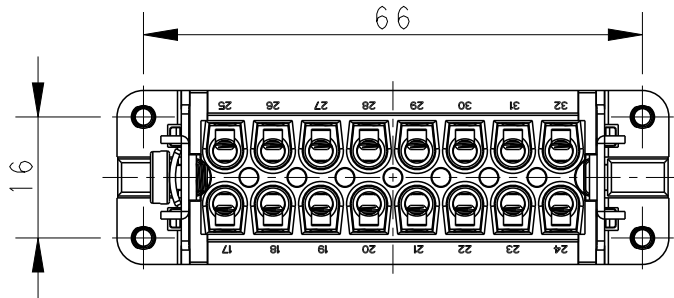
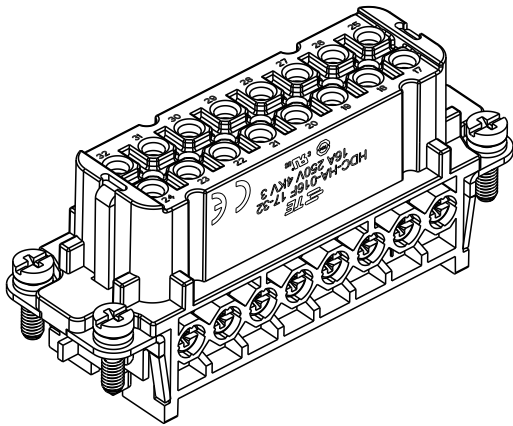


P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-15-013750	23SEP2015	DW	CW
	B1	ECR-15-016224	05NOV2015	DW	CW
	C	ECR-20-016101	09JUN2021	BS	CW
	D	ECR-25-246907	18JUN2025	ABS	RB

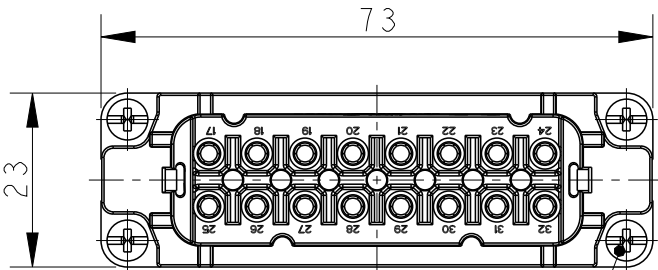

M4 SCREW
RECOMMENDED
TIGHTENING TORQUE 1.2Nm

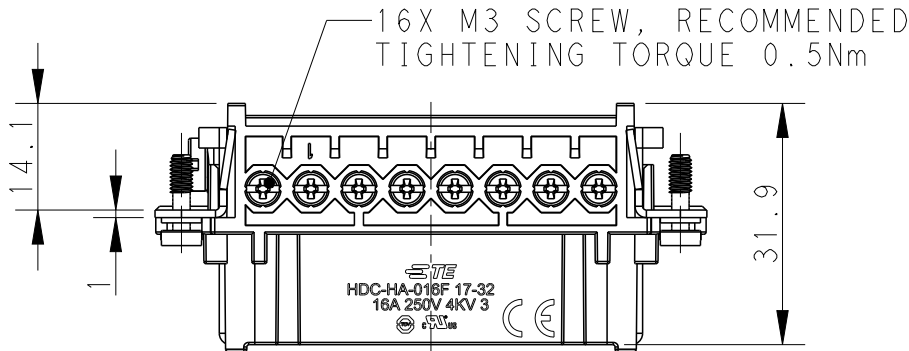


4X M3 SCREW, RECOMMENDED
TIGHTENING TORQUE 0.5Nm

NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250 V
RATED CURRENT: 16 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 4 kV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.5-2.5 mm² (20-14 AWG)
CONTACT FINISH: SILVER PLATED
CONTACT TYPE: SCREW CONTACT

注释:
1. 技术参数:
绝缘材料: PC
额定电压: 250V
额定电流: 16A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 4 kV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500 次
接线范围: 0.5-2.5 mm² (20-14 AWG)
端子表面处理: 镀银
接线类型: 螺丝连接

PANEL CUT FOR INSERTS FOR USE
WITHOUT HOODS/ HOUSINGS

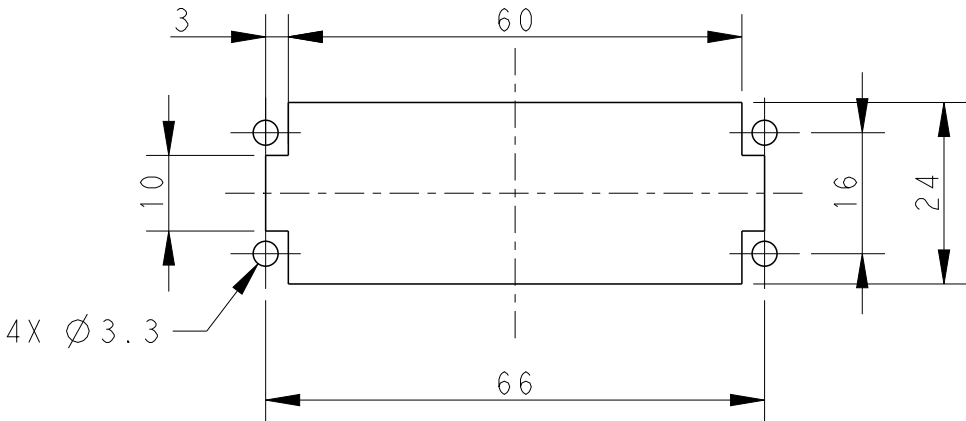

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±
MATERIAL	FINISH
-	-

DWN	22JAN2015
CHK	David Wang
Chris Wang	22JAN2015
APVD	Xiang Xu
PRODUCT SPEC	108-137045
APPLICATION SPEC	114-137045
WEIGHT	-
CUSTOMER DRAWING	

HA-016-F 17-32		T2010322201-000	
DESCRIPTION		PART NUMBER	
TE Connectivity			
NAME HA-016-F 17-32			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-T2010322201000	-
SCALE 1:1		SHEET 1 OF 1	REV D