

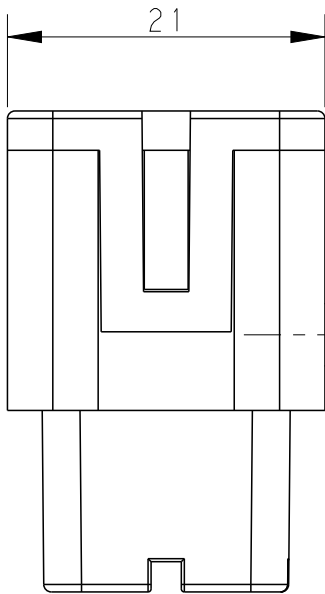
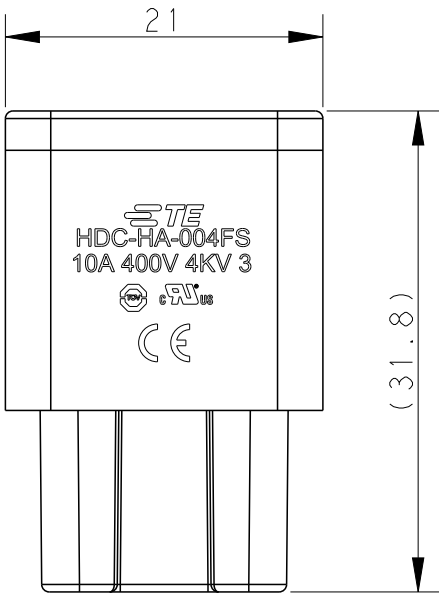
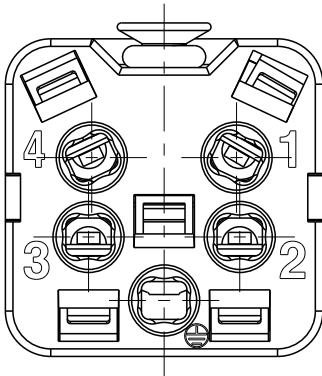


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-15-013750	21SEP2015	DW	CW
	B1	ECR-15-016224	05NOV2015	DW	CW
	C	ECR-20-016101	09JUN2021	BS	CW
	D	ECR-25-246907	17JUN2025	ABS	RB

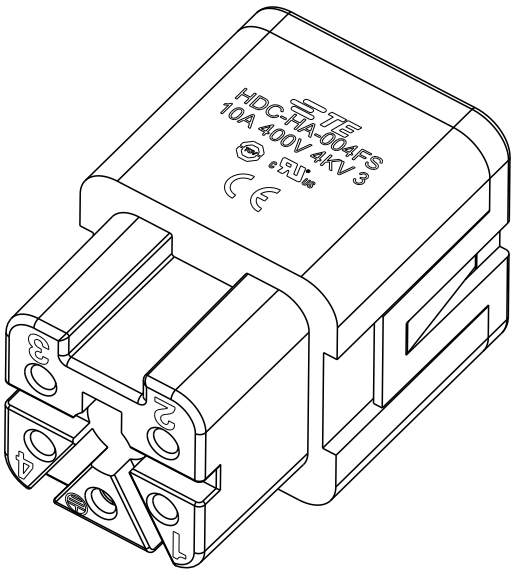


M3 SCREW,
RECOMMENDED
TIGHTENING
TORQUE 0.5Nm

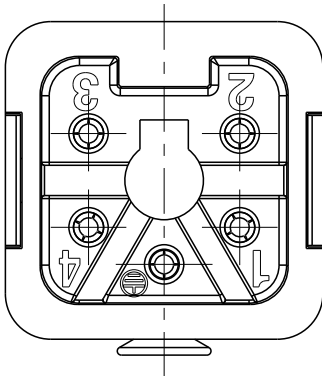

NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 400 V
RATED CURRENT: 10 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 4 KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.5-2.5 mm² (20-14 AWG)
CONTACT FINISH: SILVER PLATED
CONTACT TYPE: SPRING CONTACT

注释:
1. 技术参数:
绝缘材料: PC
额定电压: 400V
额定电流: 10A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 4 KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500 次
接线范围: 0.5-2.5 mm² (20-14 AWG)
端子表面处理: 镀银
接线类型: 弹片压接

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID WANG 18DEC2014	 TE Connectivity					
		CHK CHRIS WANG 18DEC2014						
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD XU XIANG 18DEC2014	NAME HA-004-FS					
	0 PLC ±-	PRODUCT SPEC 108-137045	SIZE A3					
	1 PLC ±-	APPLICATION SPEC 114-137045					CAGE CODE 00779	
	2 PLC ±-						DRAWING NO C-T2010043201000	
3 PLC ±-			RESTRICTED TO					
4 PLC ±-								
ANGLES ±-								
MATERIAL - -	FINISH - -	WEIGHT -	SCALE 2:1		SHEET 1 OF 1			
		CUSTOMER DRAWING		REV D				