

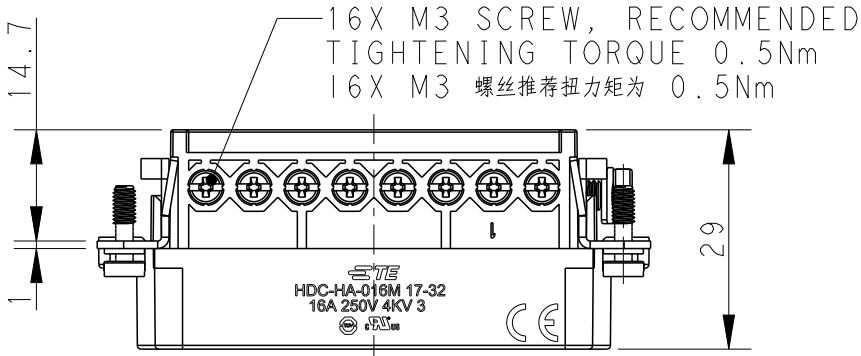
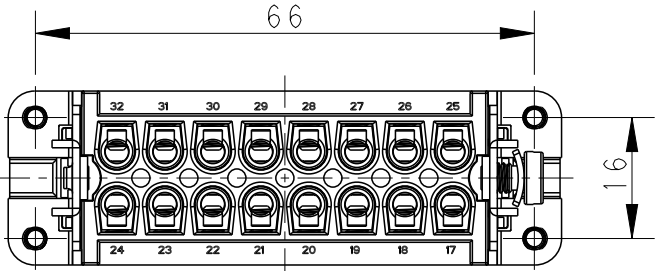


P	LTR	DESCRIPTION	DATE	DWN	APVD
	B1	ECR-15-016224	05NOV2015	DW	CW
	B2	ECR-18-008588	09JUL2018	KW	CW
	C	ECR-20-016101	09JUN2021	BS	CW
	D	ECR-25-246907	17JUN2025	ABS	RB


NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250 V
RATED CURRENT: 16 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 4 KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.5-2.5 mm² (20-14 AWG)
CONTACT FINISH: SILVER PLATED
CONTACT TYPE: SCREW CONTACT

注释:
1. 技术参数:
绝缘材料: PC
额定电压: 250V
额定电流: 16A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 4 KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500 次
接线范围: 0.5-2.5 mm² (20-14 AWG)
端子表面处理: 镀银
接线类型: 螺丝连接

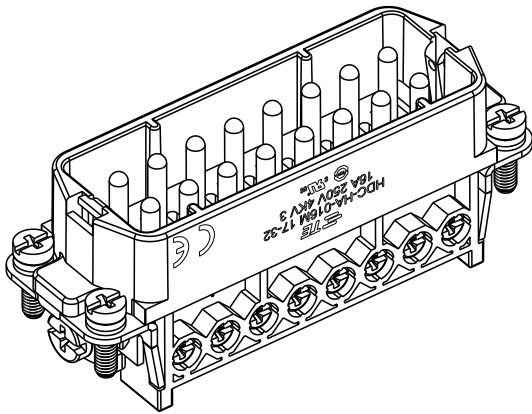


4X M3 SCREW, RECOMMENDED
TIGHTENING TORQUE 0.5Nm
4X M3 螺丝推荐扭力矩为 0.5Nm


M4 SCREW, RECOMMENDED
TIGHTENING TORQUE 1.2Nm
M4 螺丝推荐扭力矩为 1.2Nm

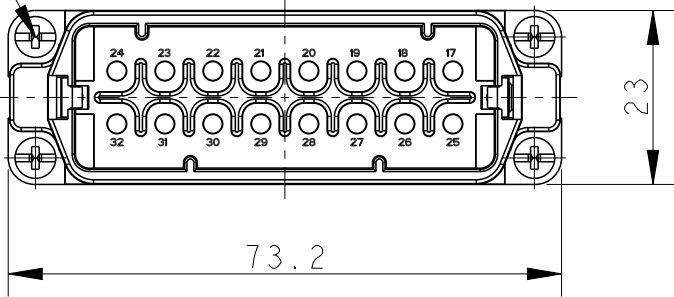

PANEL CUT FOR INSERTS FOR USE
WITHOUT HOODS/ HOUSINGS
不装壳体的面板安装开孔尺寸

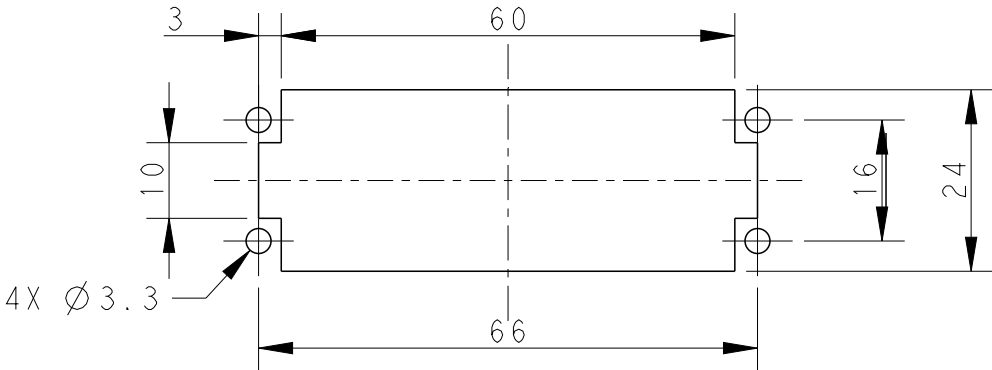

T2010322101-000	HA-016-M 17-32	HA-016 MALE INSERT 17-32 HA-016公插, 17-32
PART NUMBER 料号	PART DESCRIPTION 描述	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN David Wang 22JAN2015	 TE Connectivity		
		CHK Chris Wang 22JAN2015			
		APVD Xiang Xu 22JAN2015			
		PRODUCT SPEC 108-137045			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME HA-016-M 17-32		
		0 PLC ±-	SIZE A3		
		1 PLC ±-			
		2 PLC ±-	CAGE CODE 00779		
		3 PLC ±-			
		4 PLC ±-	DRAWING NO T2010322101000		
		ANGLES ±-			
MATERIAL -		FINISH -	RESTRICTED TO -		
CUSTOMER DRAWING			SCALE 1:1	SHEET 1 OF 1	REV D