




P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	12NOV2014	DW	CW
	B	ECR-20-016101	09JUN2021	BS	CW
	C	ECR-25-246907	17JUN2025	ABS	RB

- NOTES:
- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250 V
RATED CURRENT: 16 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 4 KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14-4 mm² (26-12 AWG)
CONTACT TYPE: CRIMP CONTACT
 - CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING: T20300X20XX000)


- 注释:
- 技术参数:
绝缘材料: PC
额定电压: 250V
额定电流: 16A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 4 KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.14-4 mm² (26-12 AWG)
接线类型: 冷压接
 - 端子需要单独订购.
(订货号参考图面: T20300X20XX000)

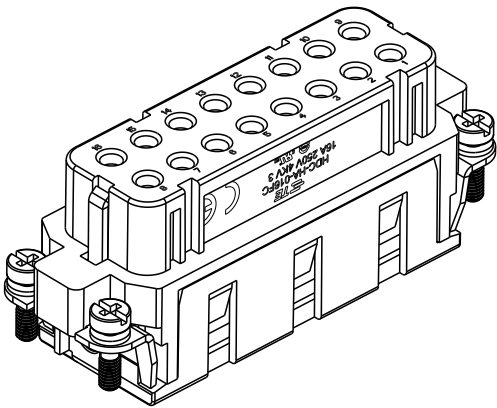


M4 SCREW
RECOMMENDED
TIGHTENING TORQUE 1.2Nm

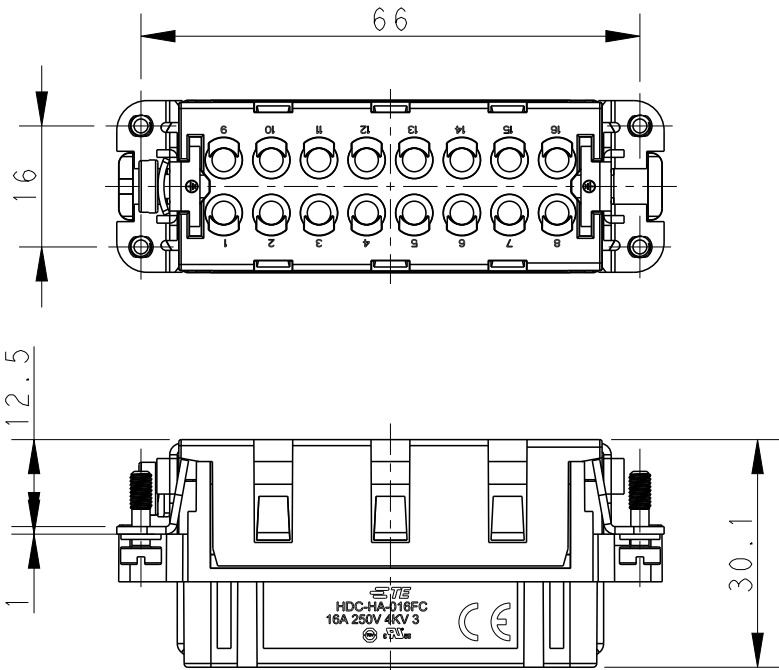

4X M3 SCREW, RECOMMENDED
TIGHTENING TORQUE 0.5Nm

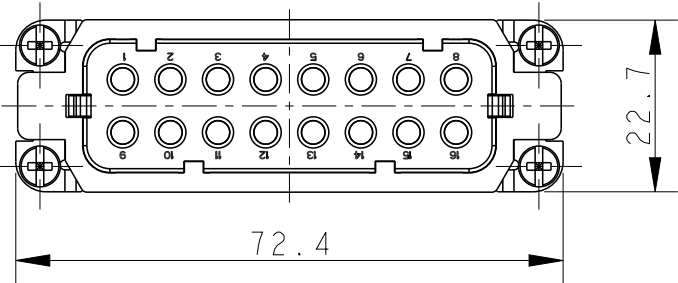

PANEL CUT FOR INSERTS FOR USE
WITHOUT HOODS/ HOUSINGS

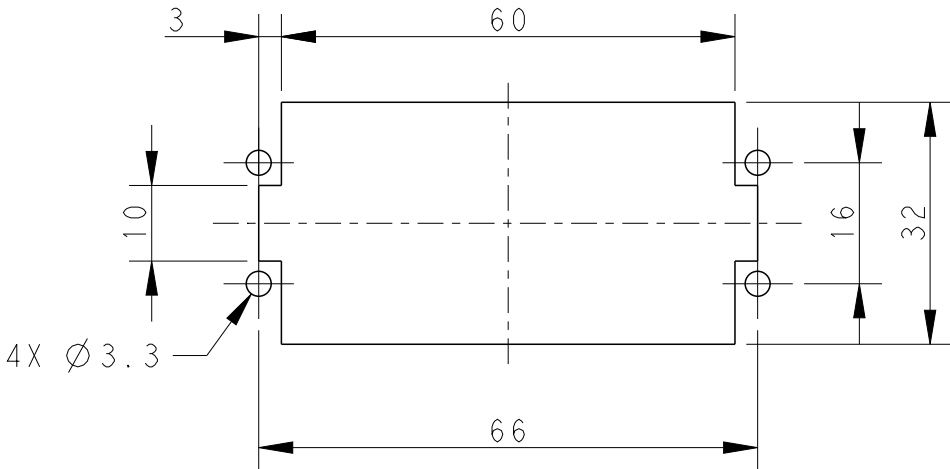

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±
MATERIAL	FINISH
-	-

DWN	12NOV2014
CHK	David Wang
APVD	Chris Wang
PRODUCT SPEC	Xiang Xu
108-137045	
APPLICATION SPEC	
114-137045	
WEIGHT	-
CUSTOMER DRAWING	

HA-016-FC		T2010164201-000	
DESCRIPTION		PART NUMBER	
TE Connectivity			
NAME HA-016-FC			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	Ⓒ-T2010164201000	-
		SCALE 1:1	SHEET 1 OF 1
		REV C	