



P	LTR	DESCRIPTION	DATE	DWN	APVD
	B1	ECR-15-016224	05NOV2015	DW	CW
	B2	ECR-16-017507	13DEC2016	QY	CW
	C	ECR-20-016101	09JUN2021	BS	CW
	D	ECR-25-246907	18JUN2025	ABS	RB

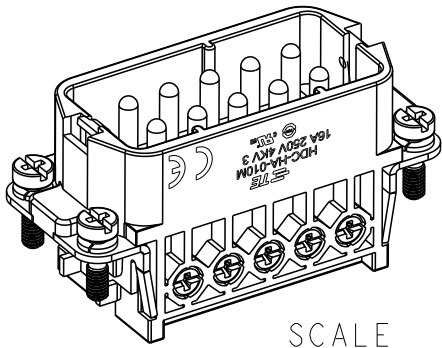


SCALE 1:1



TYPE-1,T2010102101-000,TE LOGO
类型-1,T2010102101-000,TE LOGO

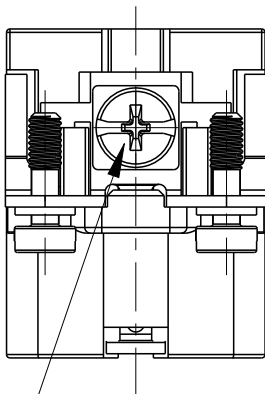


M4 SCREW RECOMMENDED
TIGHTENING TORQUE 1.2Nm
M4 螺丝,推荐锁紧力矩1.2Nm

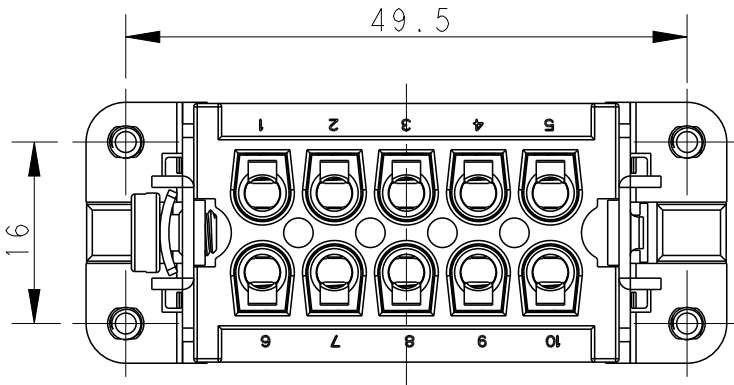

10X M3 SCREW, RECOMMENDED
TIGHTENING TORQUE 0.5Nm
10X M3 螺丝,推荐锁紧力矩0.5Nm

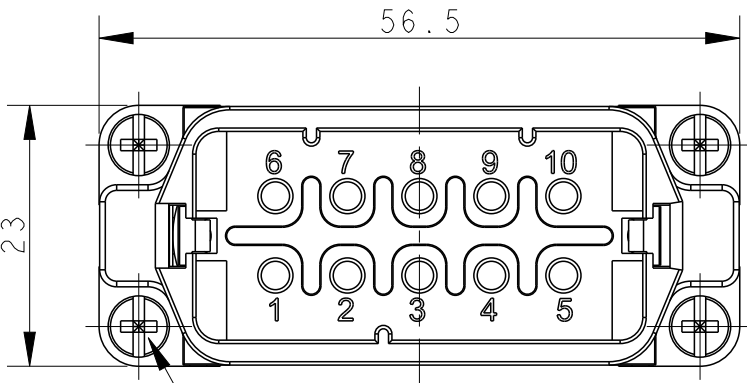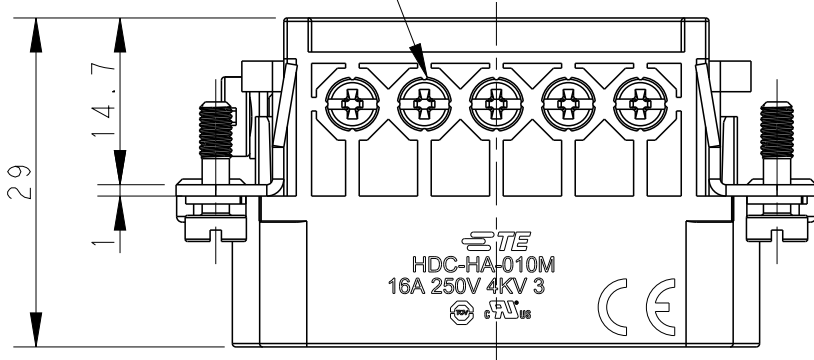

4X M3 SCREW, RECOMMENDED
TIGHTENING TORQUE 0.5Nm
4X M3螺丝,推荐锁紧力矩0.5Nm

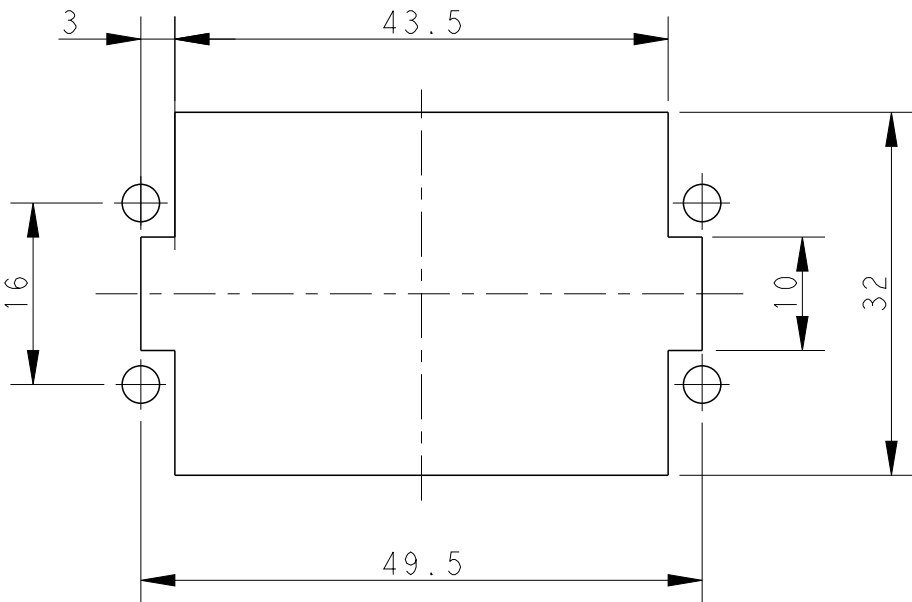


PANEL CUT FOR INSERTS FOR USING
WITHOUT HOODS/ HOUSINGS
不用防护外壳时芯件的安装开孔图

NOTES:

1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250 V
RATED CURRENT: 16 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 4 KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.5-2.5 mm² (20-14 AWG)
CONTACT FINISH: SILVER PLATED
CONTACT TYPE: SCREW CONTACT

注释:





1. 技术参数:
绝缘材料: PC
额定电压: 250V
额定电流: 16A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 4 KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500 次
接线范围: 0.5-2.5 mm² (20-14 AWG)
端子表面处理: 镀银
接线类型: 螺丝连接

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID WANG 18DEC2014		TE Connectivity				
		CHK CHRIS WANG 18DEC2014						
		APVD XU XIANG 18DEC2014						
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-		NAME HA-010-M				
				PRODUCT SPEC 108-137045				
				APPLICATION SPEC 114-137045				
				SIZE A3				
				CAGE CODE 00779				
MATERIAL - -		FINISH - -		DRAWING NO C-T2010102101000		RESTRICTED TO -		
CUSTOMER DRAWING				SCALE 3:2		SHEET 1 OF 2		REV D

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-


NOTE :
SEE SHEET 1

注释 :
见页 1

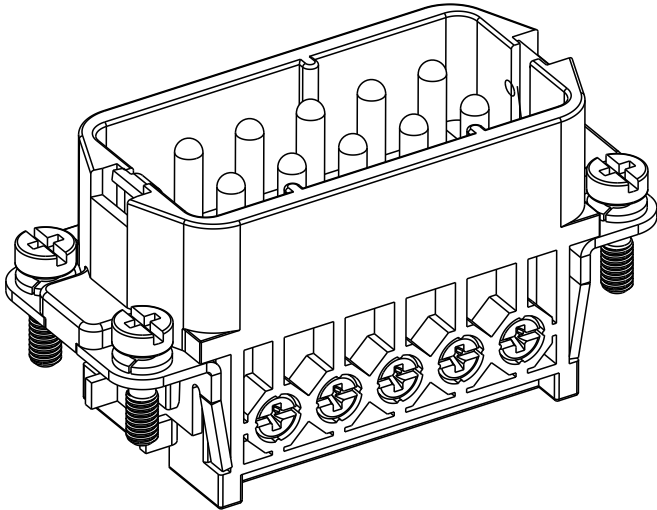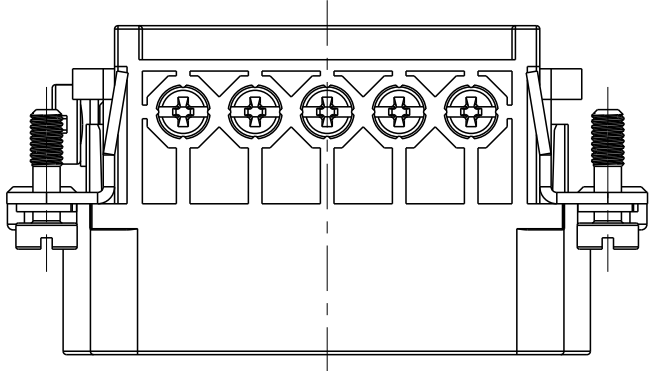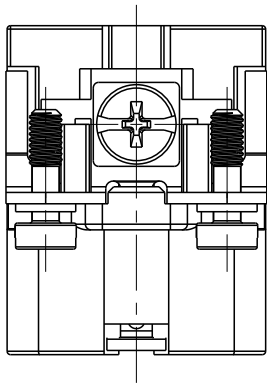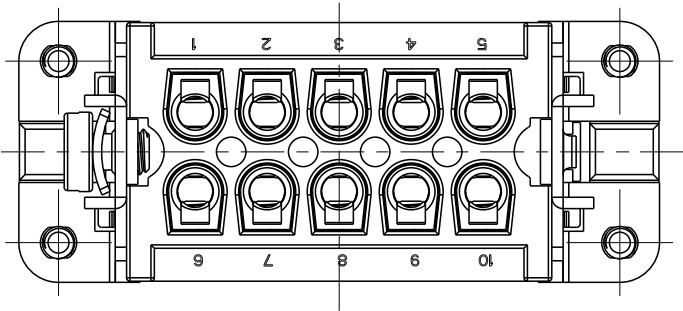


ALL DIMENSIONS ARE SAME AS TYPE 1,
EXCEPT THOSE DEFINED IN THIS TYPE.
除了在本类型中定义的尺寸外，其它尺寸同类型 1

TYPE-2, T2010102101-001, NO LOGO
类型-2, T2010102101-001, 无 LOGO

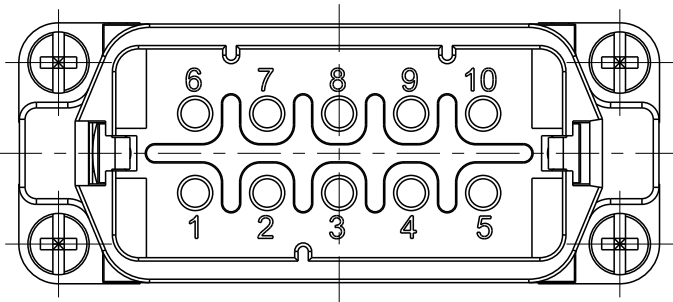

T2010102101-001	HA-010-M	HA-010 MALE INSERT, NO LOGO HA-010公插, 无LOGO	TYPE-2 类 型-2
T2010102101-000	HA-010-M	HA-010 MALE INSERT HA-010公插	TYPE-1 类 型-1
PART NUMBER 料 号	PART DESCRIPTION 描 述		TYPE 类 型

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID WANG 18DEC2014	 TE Connectivity			
		CHK CHRIS WANG 18DEC2014				
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD XU XIANG 18DEC2014	NAME HA-010-M			
	0 PLC ±-	PRODUCT SPEC 108-137045				
	1 PLC ±-	APPLICATION SPEC 114-137045	SIZE A3		CAGE CODE 00779	DRAWING NO C-T2010102101000
	2 PLC ±-	WEIGHT -	RESTRICTED TO -			
3 PLC ±-						
4 PLC ±-						
ANGLES ±-						
MATERIAL - -	FINISH - -					
CUSTOMER DRAWING		SCALE 1:1		SHEET 2 OF 2	REV D	