

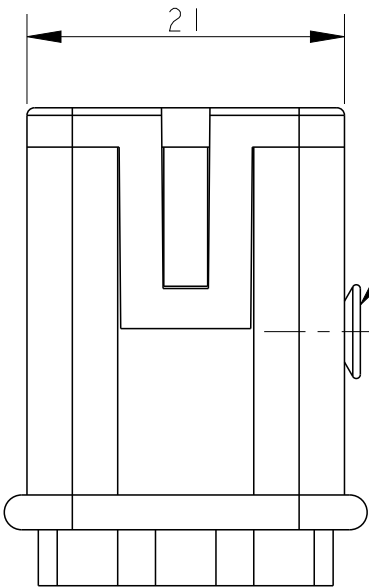
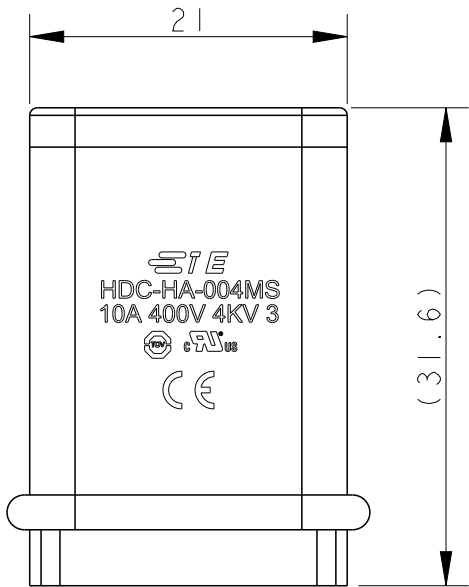
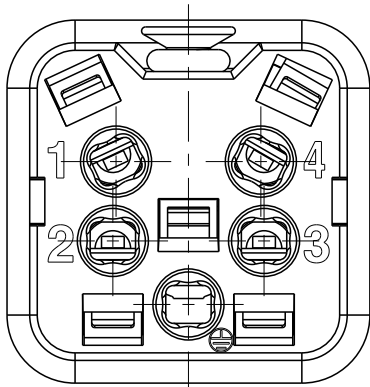


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-15-013750	21SEP2015	DW	CW
	B I	ECR-15-016224	05NOV2015	DW	CW
	C	ECR-20-016101	09JUN2021	BS	CW
	D	ECR-25-246907	17JUN2025	ABS	RB

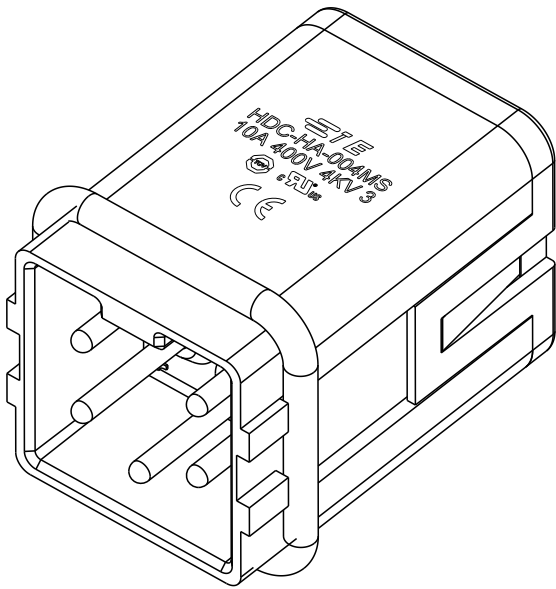


M3 SCREW,
RECOMMENDED
TIGHTENING
TORQUE 0.5Nm

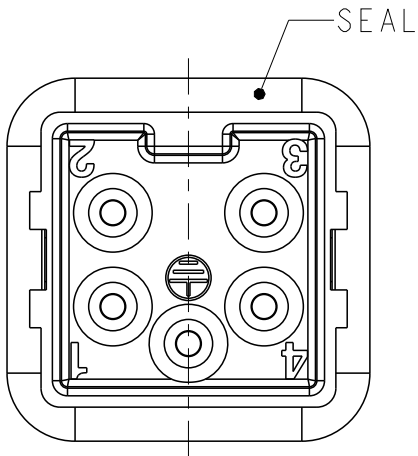

NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 400 V
RATED CURRENT: 10 A
INSULATION RESISTANCE: $\geq 400\text{M}\Omega$
RATED IMPULSE VOLTAGE: 4 kV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.5-2.5 mm² (20-14 AWG)
CONTACT FINISH: SILVER PLATED
CONTACT TYPE: SPRING CONTACT

注释:
1. 技术参数:
绝缘材料: PC
额定电压: 400V
额定电流: 10A
绝缘电阻: $\geq 400\text{M}\Omega$
额定脉冲电压: 4 kV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500 次
接线范围: 0.5-2.5 mm² (20-14 AWG)
端子表面处理: 镀银
接线类型: 弹片压接

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID WANG 18DEC2014		TE Connectivity			
		CHK CHRIS WANG 18DEC2014					
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD XU XIANG 18DEC2014		NAME HA-004-MS	
		0 PLC ±-		PRODUCT SPEC			
		1 PLC ±-		108-137045			
		2 PLC ±-		APPLICATION SPEC			
		3 PLC ±-		114-137045		SIZE	
		4 PLC ±-				CAGE CODE	
		ANGLES ±-				DRAWING NO	
MATERIAL		FINISH		WEIGHT		RESTRICTED TO	
-		-		-		-	
-		-					
CUSTOMER DRAWING						SCALE	SHEET
						2:1	1 OF 1
							REV D