
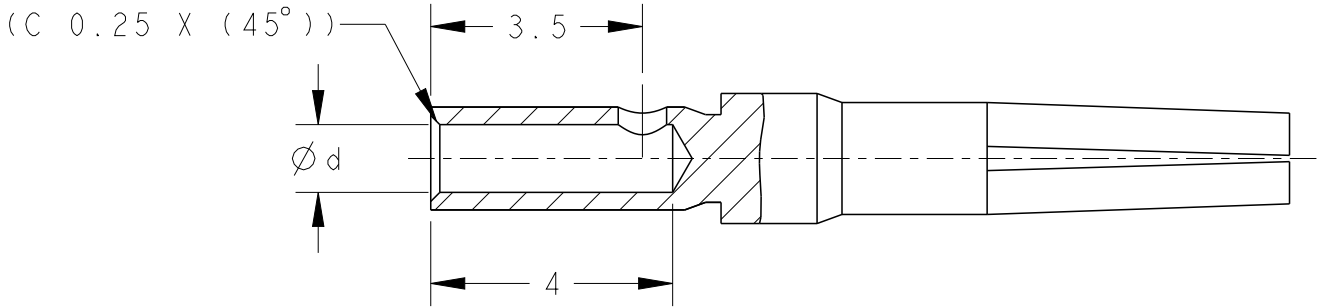
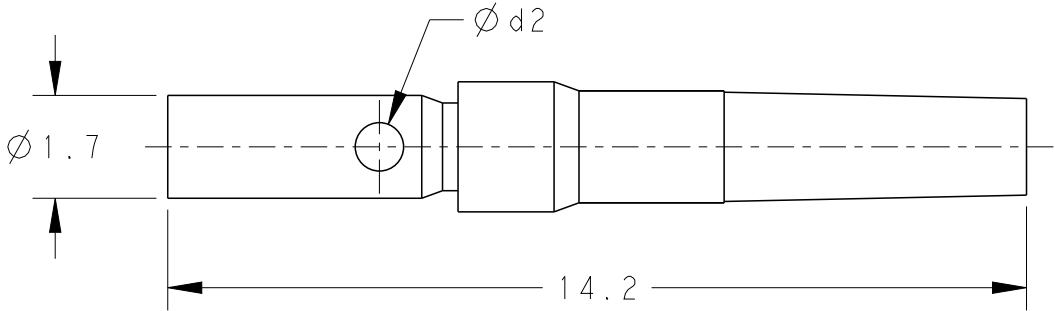


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	15MAY2015	DW	CW
	A1	ECR-16-002757	24FEB2016	RL	CW
	A2	ECR-21-000654	26JAN2021	BS	CW
	B	ECR-25-266243	30JAN2026	SC	RB

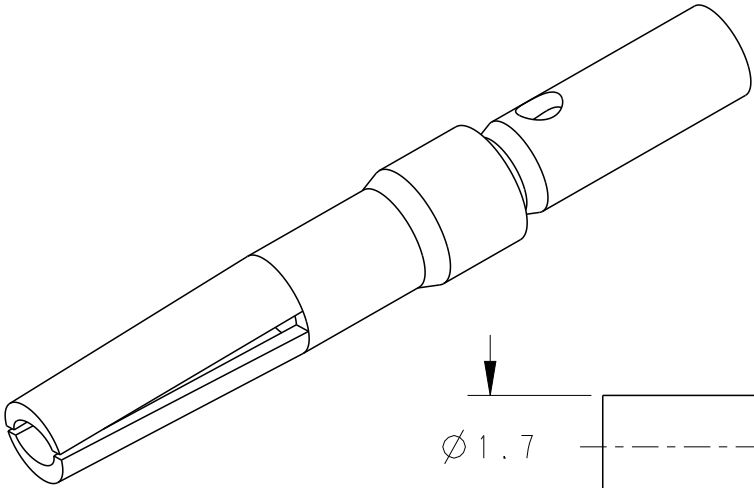

NOTES:
I. TECHNICAL CHARACTERISTICS:
CONTACT MATERIAL: BRASS
SURFACE PLATING:
SILVER PLATING: >= 2µm
GOLD PLATING: >= 0.25µm
WIRE RANGE: 0.08-0.52 mm² (28-20 AWG)
OPERATION TEMPERATURE: -40-+125°C

注释:
I. 技术参数:
公针材料: 黄铜
表面电镀:
镀银: >= 2µm
镀金: >= 0.25µm
接线范围: 0.08-0.52 mm² (28-20 AWG)
工作温度: -40-+125°C

-	PART NUMBER AFTER PLATING 电镀后料号				Ø d	Ø d2	WIRE GAUGE 线规		STRIPPING LENGTH 剥线长度 (mm)
	SILVER PLATING 镀银		GOLD PLATING 镀金				MM ²	AWG	
SOCKET CONTACT 母针	CAF-08	T2070002008-000	DAF-08	T2070012008-000	0.7	0.6	0.08-0.21	28-24	4.0
	CAF-13	T2070002013-000	DAF-13	T2070012013-000	0.9	0.8	0.13-0.33	26-22	
	CAF-33	T2070002033-000	DAF-33	T2070012033-000	1.12	0.8	0.33-0.52	22-20	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 15MAY2015 David Wang	TE Connectivity		
		CHK 15MAY2015 Chris Wang			
DIMENSIONS: mm		APVD 15MAY2015 Xiang Xu	NAME CAF/DAF D-SUB SOCKET CONTACT		
		PRODUCT SPEC 108-137064			
		APPLICATION SPEC 114-137064	SIZE A300779		
MATERIAL -		WEIGHT -			
		Customer Drawing	DRAWING NO T20700X20XX000		
			RESTRICTED TO -		
			SCALE 8:1 SHEET 1 OF 1 REV B		